

PRODUCT GUIDE

OVER 350 PRODUCTS TO FIT YOUR LIFESTYLE







MOWERS All-Flex Mowers Flail Mowers Grooming Mowers CUTTERS 12 TILLERS 39 COMPACT DRILLS SEEDERS All-Purpose Seeders All-Purpose Seeders Ford Plot Seeders Food Plot Seeders Food Plot Seeders Food Plot Seeders Food Plot Seeders Formary Seeders Frimary Seeders Formary Seeders Food Bed Rollers DIRTWORKING Arena Groomers Formary For
Flail Mowers Grooming Mowers 4 CUTTERS 12 TILLERS 39 COMPACT DRILLS SEEDERS All-Purpose Seeders 55 Drag Harrows 61 Fertilizer Spreaders Food Plot Seeders 62 No-Till Seeders 56 Primary Seeders 57 Seed Bed Rollers 60 DIRTWORKING Arena Groomers Box Scrapers 72 Core Aerators 79 Disc Harrows 11 Box Scrapers 72 Core Aerators 79 Disc Harrows 81 Ditchers 83 Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Grooming Mowers CUTTERS TILLERS COMPACT DRILLS SEEDERS All-Purpose Seeders All-Purpose Seeders Fertilizer Spreaders Food Plot Seeders Overseeders Food Plot Seeders Food Plot
CUTTERS TILLERS 39 COMPACT DRILLS SEEDERS All-Purpose Seeders Drag Harrows Fertilizer Spreaders Food Plot Seeders Food
TILLERS COMPACT DRILLS SEEDERS All-Purpose Seeders Drag Harrows 61 Fertilizer Spreaders Food Plot Seeders Food Plot See
COMPACT DRILLS SEEDERS All-Purpose Seeders Drag Harrows 61 Fertilizer Spreaders Food Plot Seeders Foo
All-Purpose Seeders 55 Drag Harrows 61 Fertilizer Spreaders 58 Food Plot Seeders 62 No-Till Seeders 54 Overseeders 56 Primary Seeders 57 Seed Bed Rollers 60 DIRTWORKING Arena Groomers 63 Box Scrapers 72 Core Aerators 79 Disc Harrows 81 Ditchers 83 Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
All-Purpose Seeders Drag Harrows Fertilizer Spreaders Food Plot Seeders Food Plot Se
Drag Harrows Fertilizer Spreaders Food Plot Seeders Food Primary Seeders Food Primary Seeders Food Bed Rollers Food
Fertilizer Spreaders Food Plot Seeders Food Plot Seeders Food Plot Seeders Food Plot Seeders Formary Seeders Frimary Seeders Frimary Seeders Food Bed Rollers Food Bed Rollers Food Bed Rollers Food Primary Seeders Food Bed Rollers Food Bed Rolle
Food Plot Seeders No-Till Seeders Overseeders Frimary Seeders Seed Bed Rollers DIRTWORKING Arena Groomers Box Scrapers Core Aerators Disc Harrows Ditchers Seed Sed Rollers 72 Core Aerators 79 Disc Harrows 81 Ditchers 83 Drag Scrapers 78 Field Cultivators Grading Scrapers Hydraulic Reservoir Systems Landscape Rakes Moldboard Plows Pasture Aerators 84 62 84 85 86 87 88 88
No-Till Seeders Overseeders Frimary Seeders Seed Bed Rollers DIRTWORKING Arena Groomers Box Scrapers Core Aerators Disc Harrows Ditchers Drag Scrapers Field Cultivators Grading Scrapers Hydraulic Reservoir Systems Landscape Rakes Moldboard Plows Pasture Aerators 54 54 54 54 56 57 58 58 57 57 59 57 60 83 83 84 85 86 67 87 88 66 67 67 67 67 67 67 67 68 67 67 67 67 67 67 68 67 67 67 67 68 67 67 68 67 67 68 67 67 68 67 68 67 68 68 68 68 68 68 68 68 68 68 68 68 68
Overseeders Primary Seeders Seed Bed Rollers DIRTWORKING Arena Groomers Arena Groomers Box Scrapers Core Aerators Disc Harrows Ditchers Drag Scrapers Field Cultivators Grading Scrapers Hydraulic Reservoir Systems Landscape Rakes Moldboard Plows Pasture Aerators 56 57 72 72 79 81 79 81 83 Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators
Primary Seeders Seed Bed Rollers 60 DIRTWORKING Arena Groomers 63 Box Scrapers 72 Core Aerators 79 Disc Harrows 81 Ditchers 83 Drag Scrapers 78 Field Cultivators 63 84 85 Grading Scrapers 77 Hydraulic Reservoir Systems Landscape Rakes Moldboard Plows Pasture Aerators 86 87 88
Seed Bed Rollers DIRTWORKING Arena Groomers Box Scrapers Core Aerators Disc Harrows Ditchers Drag Scrapers Field Cultivators Grading Scrapers Hydraulic Reservoir Systems Landscape Rakes Moldboard Plows Pasture Aerators 63 72 79 81 79 81 83 Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 88
DIRTWORKING Arena Groomers 63 Box Scrapers 72 Core Aerators 79 Disc Harrows 81 Ditchers 83 Drag Scrapers 78 Field Cultivators 63 84 85 Grading Scrapers 77 Hydraulic Reservoir Systems Landscape Rakes Moldboard Plows Pasture Aerators 88
Arena Groomers 63 Box Scrapers 72 Core Aerators 79 Disc Harrows 81 Ditchers 83 Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Box Scrapers 72 Core Aerators 79 Disc Harrows 81 Ditchers 83 Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Core Aerators 79 Disc Harrows 81 Ditchers 83 Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Disc Harrows 81 Ditchers 83 Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Ditchers 83 Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Drag Scrapers 78 Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Field Cultivators 86 Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Grading Scrapers 77 Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Hydraulic Reservoir Systems 110 Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Landscape Rakes 70 Moldboard Plows 87 Pasture Aerators 88
Moldboard Plows 87 Pasture Aerators 88
Pasture Aerators 88
Post Hola Diagars 1 89
Powered Rakes 93
Rear Blades 64
Ripper Shanks 85 Scarifiers 71
7.1
Soil Pulverizers 94
Spike Tooth Harrows 95 Straw Crimper 80
Straw Crimper 80 MATERIAL HANDLING
Stump Grinders 106
Wood Chippers 107
Bale Spears 97
Bale Grapples 98
Pallet Forks 96
Grapples & Buckets 99
HITCHES 108
SNOW TOOLS 109

FDR16 SERIES GROOMING MOWERS









The mower for a homeowner.

Land Pride Grooming Mowers are a rear-mount alternative to a bellymount mower for your subcompact and compact tractor. With three fixed blades and a floating 3-Point hitch, these mowers give you a clean cut in fescue and other turf-type grasses.







The tapered rear discharge directs debris toward the ground eliminating the need for chains which provides for a more even distribution of clippings.





The driveline storage hook keeps the driveline off the ground when not in use.



Top and bottom hitch points float up and down which allows the mower to float over uneven terrain.



Non-aligned rear gauge wheels don't track behind the front wheels to reduce laying grass over.

Horsepower	15-40 HP				
Hitch	Cat. 1				
Working Width (cm)	48" (122) 60" (152) 72" (183)				
Overall Width (cm)	51" (130)	63" (160)	75" (190)		
Weight - lb (kg)	486 (220)	619 (281)			
Mowing Height	3/4" - 5-1/4"				
Deck Material Thickness	3/16"				
Blades 3 ea. Heat Treated Alloy Steel	1/4" x 2-1/2" x 1/4" x 2-1/2" x 16-7/8" x 21"		1/4" x 2-1/2" x 25"		
Blade Overlap	1-1/4"				
Blade Spindles	Greaseable				
Blade Tip Speed	16,203 fpm 18,195 fpm		18,130 fpm		
Castered Gauge Wheels, 4-each	3-1/4" x 10" Solid Rubber Tire				
Castered Wheel Spindle	1" Diameter Stressproof® Material				
Drive Train	540 RPM B-Section V-Belt				
Driveline	Heavy-Duty w/Quick Coupler				
Front Roller	Optional				
Colors					

Stressproof® is a Registered Trademark of Niagara Lasalle Corporation



FDR25 SERIES GROOMING MOWERS







Full-size mower for compact tractors.

The FDR25 Series of Grooming Mowers offer the same 3-blade system and floating hitch as the FDR16 and provide professional results for larger acreage homeowners and municipalities. The 72" and 84" cutting widths are well-suited for most compact tractors. Their frame-over-deck design supports the deck, minimizing flex and provides superb cutting performance in turf-grass applications.





Some tractor and tire combinations do not allow enough room for mower hook-up. Longer lower hitch clevises are available to easily correct this situation.





Solid rubber tires are sandwiched between the rim halves and bolted in.



Main drive cast iron pulley offers superior strength and belt slippage control.



Blade spindles and bearings are precision fit in a cast iron housing.

	FDR2572	FDR2584	
Horsepower	15-60 HP		
Hitch	Ca	t. 1	
Working Width (cm)	72" (183)	84" (213)	
Overall Width (cm)	74-7/8" (190)	86-1/2" (220)	
Weight - lb (kg)	718 (326)	812 (368)	
Mowing Height	3/4" - 5-1/4"		
Discharge	Re	ar	
Lower Hitch	Floating Clevis	w/Plated Pins	
Top Link	Floating Clevis		
Deck Material Thickness	3/16"		
Blades 3 ea. Heat Treated Alloy Steel	1/4" x 2-1/2" x 25"	5/16" x 2-1/2" x 29"	
Blade Overlap	1-1/	4"	
Blade Spindles	Greaseable		
Deck Spindle Housings	Cast Iron Greaseable Hubs		
Blade Tip Speed	18,130 fpm	17,210 fpm	
Castered Gauge Wheels, 4-each	3-1/4" x 10" Solid Rubber Tire	4" x 11" Semi-Solid	
Castered Wheel Spindle	1" Diameter Stres	sproof® Material	
Drive Train	540 RPM B-Section V-Belt		
Driveline	Heavy-Duty w/	Quick Coupler	
Front Roller	Optional		
Colors			
	Quici	Нтсн	



FDR36 SERIES

GROOMING MOWERS





30-70 HP

Cat. 1

Horsepower Hitch



Call it "Contractor-duty"

Our FDR3690 Grooming Mower is built for commercial use by mowing contractors. Contractors will appreciate the ease of maintenance and the 6 free-swinging mediumlift blades that provide a uniform cut in heavy turf grasses. The tapered deck design allows operators to get close to obstacles while the rear discharge directs debris toward the ground, allowing for even distribution of clippings.



The FDR36 frame-over-deck design is engineered for maximum airflow, featuring a roll-formed 1/4" leading edge, 6 free-swinging blades and a tapered and sloped rear deflector.





Rear discharge distributes an even layer of grass directly behind the mower, keeping grass from blowing in unwanted areas.



Main drive cast iron pulley offers superior strength and belt slippage control.



Clevis type lower hitch points allow for easy hook-up. Simply remove pins and back into clevises.

Working Width (cm) 92" (234) Weight - Ib (kg) 930 (422) (w/o Front Roller) Mowing Height 1" - 6-1/2" in 1/4" Increments w/Plated Spacers Discharge Rear Lower Hitch Floating Clevis w/Plated Pins Top Link Floating Clevis w/Plated Pins Blades 6 ea. 716" Blades 6 ea. 716" Blade Overlap 2" Blade Tip Speed 16,500 fpm Blade Spindles 1-3/8" Stressproof Shaft Deck Spindle Housings Cast Iron Greasable Hubs Drive Train Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional	пис	Cat. 1	
Weight - Ib (kg) Weight - Ib (kg) Mowing Height 1" - 6-1/2" in 1/4" Increments w/Plated Spacers Rear Lower Hitch Floating Clevis w/Plated Pins Top Link Floating Clevis w/Plated Pins Blades 6 ea. Free Swinging, 1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per Blade Spindle) Blade Tip Speed 16,500 fpm Blade Spindles 1-3/8" Stressproof* Shaft Cast Iron Greasable Hubs Drive Train Double V Powerband Belt Belt Take-up Gearbox Castered Gauge Wheels S" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional	Working Wid	90" (229)	
(w/o Front Roller) Mowing Height 1" - 6-1/2" in 1/4" Increments w/Plated Spacers Ploating Clevis w/Plated Pins Top Link Floating Clevis w/Plated Pins Floating Clevis 3/16" Blades 6 ea. Free Swinging, 1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per Blade Spindle) Blade Overlap 2" Blade Tip Speed 16,500 fpm Blade Spindles 1-3/8" Stressproof* Shaft Deck Spindle Housings Cast Iron Greasable Hubs Drive Train Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 5" x 13" Semi-Solid Tire with Bearings Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional	Overall Width (cr	92" (234)	
in 1/4" Increments w/Plated Spacers Discharge Rear Lower Hitch Floating Clevis w/Plated Pins Top Link Floating Clevis Blades 6 ea. Free Swinging, 1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per Blade Spindle) Blade Overlap 2" Blade Tip Speed 16,500 fpm Blade Spindles 1-3/8" Stressproof Shaft Deck Spindle Housings Cast Iron Greasable Hubs Drive Train 540 rpm Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional Colors	Weight - lb (k		
Lower Hitch Top Link Floating Clevis w/Plated Pins Top Link Floating Clevis 3/16" Blades 6 ea. Free Swinging, 1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per Blade Spindle) Blade Overlap 2" Blade Tip Speed 16,500 fpm Blade Spindles 1-3/8" Stressproof* Shaft Deck Spindle Housings Cast Iron Greasable Hubs Drive Train Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional	Mowing Heigh	in 1/4" Increments	
Top Link Ploating Clevis 3/16" Blades 6 ea. Free Swinging, 1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per Blade Spindle) Blade Overlap 2" Blade Tip Speed 16,500 fpm Blade Spindles 1-3/8" Stressproof* Shaft Deck Spindle Housings Cast Iron Greasable Hubs Drive Train Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional	Discharg	ge Rear	
Deck Material Thickness Blades 6 ea. Free Swinging, 1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per Blade Spindle) Blade Overlap 2" Blade Tip Speed 16,500 fpm Blade Spindles 1-3/8" Stressproof" Shaft Cast Iron Greasable Hubs Drive Train 540 rpm Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional	Lower Hite	Floating Clevis w/Plated Pins	
Blades 6 ea. Free Swinging, 1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per Blade Spindle) Blade Overlap 2" Blade Tip Speed 16,500 fpm 1-3/8" Stressproof* Shaft Deck Spindle Housings Cast Iron Greasable Hubs Drive Train Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional	Top Lir	Floating Clevis	
1/4" x 2-1/2" x 14" Hardened, Medium Lift (2 per Blade Spindle) Blade Overlap 2" Blade Tip Speed 16,500 fpm 1-3/8" Stressproof* Shaft Deck Spindle Housings Cast Iron Greasable Hubs Drive Train 540 rpm Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Colors Optional	Deck Material Thicknes	3/16"	
Blade Tip Speed Blade Spindles 1-3/8" Stressproof® Shaft Deck Spindle Housings Cast Iron Greasable Hubs Drive Train Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional	Blades 6 e	1/4" x 2-1/2" x 14" Hardened, Medium Lift	
Blade Spindles 1-3/8" Stressproof* Shaft Cast Iron Greasable Hubs Drive Train 540 rpm Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Take-up Spring Loader Idler Stressen-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional	Blade Overla	ap 2"	
Deck Spindle Housings Drive Train S40 rpm Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox S40 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels S"x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional Colors	Blade Tip Spee	ed 16,500 fpm	
Drive Train Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional Colors	Blade Spindle	1-3/8" Stressproof® Shaft	
Double V Powerband Belt Belt Take-up Spring Loader Idler Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional Colors	Deck Spindle Housing	Cast Iron Greasable Hubs	
Gearbox 540 rpm, Cast Iron Housing with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional Colors	Drive Tra		
with Beveled Gears Castered Gauge Wheels 5" x 13" Semi-Solid Tire with Bearings Castered Wheel Spindle 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional Colors	Belt Take-u	Spring Loader Idler	
with Bearings 1-1/4" Diameter with Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional Colors	Gearbo		
Greasable Bushing Driveline Heavy-Duty Cat. 4 w/Quick Coupler Front Roller Optional Colors	Castered Gauge Whee		
w/Quick Coupler Front Roller Optional Colors	Castered Wheel Spind		
Colors	Drivelin		
	Front Roll	er Optional	
ОшолИтон	Colo	rs	
		О шек И тен	



AFM3011 ESTATE ALL-FLEX MOWERS





30-55 HP

Pull-Type, Adjustable Clevis & Safety Tow Chain

Horsepower



Just right for estate mowing.

The weight on the AFM3011 has been reduced from our commercial series to fit compact tractors in the 30 to 55 HP range. With a cutting width of 11' and cutting height of 1" to 5-½", the AFM3011 will rival a zero-turn in volume and quality. The decks are 4' wide, 10 gauge steel with a 6" overlap; coupled with a single beam hitch and equal angle driveline this unit can make tight turns without streaking. The decks feature rear discharge and angled deflectors to eliminate the need for chains and to provide even distribution without clumping.



Counter blade rotation on the center and right decks prevent robbing horsepower of the tractor. Rear discharge leaves a thin even layer of grass directly behind the mower, keeping grass from blowing in unwanted areas.





Angled deflectors on the decks eliminate the need for chains and provide even distribution without clumping.



Optional Hydraulic Wing Unlock allows user to unlock the wings from the tractor seat.



Single beam hitch and equal angle driveline allows the mower to make tight turns without streaking.

	,	
Working Width (cm)	11'1" (338)	
Overall Width	11'3-1/2"	
Transport Width	7'8"	
Positive Tongue Wt - Ib	434	
Weight - lb (kg)	1,920 (871)	
Cutting Height	1" - 5-1/2" in 1/2" Incr.	
Wing Cylinders	Dual Acting	
Rear Deck Cylinder	2" x 8"	
Gearbox	540 RPM, 1 Splitter, 3 Wing	
Decks: 3 each	48"	
Deck Thickness	10 Gauge	
Deck Overlap	6"	
Deck Spindle Housing	Cast Iron Sealed Hubs	
Blade Size	1/4" x 2-1/2" x 16-7/8" w/Fusion® Edge	
Blade Overlap	1-3/16"	
Blade Tip Speed	16,020 fpm (182 mph)	
Blade Bearings Sealed Ball Bearings		
Blade Spindles	1-3/8" Stressproof® Shaft	
Blade Spindle RPM	3,628 RPM	
Belt	B-Section V Belt	
Discharge	Rear	
Deck Tires - 10 total	10 x 3.25 Solid Rubber	
Deck Wheel Spindles	1-1/4" w/Nylon Bushings	
Transport Tires and Bearing	18 x 9.5 w/Sealant	
Transport Lock	Automatic w/Pull Rope Release or Optional Hydraulic Release	
Hyd. Outlets Required	1 Set	
Input Driveline	Cat. 3 Equal Angle	
Deck Driveline	Cat. 3 w/Shearbolt Protection	
Mowing capacity @2mph	2.68 Acres/hr	
@4mph	5.37 Acres/hr	
@6mph	8.1 Acres/hr	
Flex - Wings	23° L-R, 22° F-B	
Flex - Center	13° F-B	
Colors		

AFM42 SERIES ALL-FLEX MOWER







30-65 HP

Pull-Type, Adjustable Clevis & Safety Tow Chain

Horsepower Hitch



Unmatched Performance.

An 11' AFM is just right to use around the golf course, in the city park, or to maintain your five acre estate. Easy to use and maintain, keep your grass looking like it was cut with a walk-behind, but with a lot less time invested!

- Rear discharge
- Counter rotation
- · Non-caster gauge wheels
- Single beam tongue



Dispensing cut grass is a key ingredient to maintaining healthy turf. The more evenly and completely the cut grass is dispersed, the quicker it works its way towards the soil for decomposition.





Counter rotation on left hand deck doesn't throw debris into the center deck.



Non-caster gauge wheels hold slopes better and assists with tight turns.



Single beam tongue design with 80° CV drive helps make extremely tight turns.

Working Width (cm)	11'1" (338)	
Overall Width	11'3-1/2"	
Transport Width	7'8"	
Positive Tongue Wt - Ib	450	
Weight - Ib (kg)	2,240 (1,016)	
Cutting Height	1" - 5-1/2" in 1/4" Incr.	
Wing Cylinders	2-1/2" x 12"	
Rear Deck Cylinder Gearbox	2" x 8" 540 RPM, 1 Splitter, 3 Wing	
Decks: 3 each	48"	
Deck Thickness	3/16"	
Deck Overlap	6"	
Deck Spindle Housing	Cast Iron Greaseable Hubs	
Blade Size	1/4" x 2-1/2" x 16-7/8"	
Blade Overlap 1-3/16"		
Blade Tip Speed 16,020 fpm (182 mph)		
Blade Bearings	Blade Bearings Greaseable Ball Bearings	
Blade Spindles	1-3/8" Stressproof® Shaft	
Blade Spindle RPM	3,628 RPM	
Drive Train	540 RPM B-section V Belt	
Discharge	Rear	
Deck Tires - 10 total	13 x 5 Air Tire, Sealant	
Deck Wheel Spindles	1-1/4" w/Nylon Bushings	
Transport Tires and Bearing	18 x 9.5, Sealant and Tapered Bearings	
Anti-Scalp Roller	Front Center and Outside Deck Corners	
Input Driveline	Cat. 3 CV w/Slip Clutch	
Deck Driveline	Cat. 3	
Mowing capacity @2mph	2.68 Acres/hr	
@4mph	5.37 Acres/hr	
@6mph	8.1 Acres/hr	
Flex - Wings	23° L-R, 22° F-B	
Flex - Center	13° F-B	
Transport Lights	Standard	
Colors		

AFM42 SERIES ALL-FLEX MOWER









Get the results you deserve!

The AFM42 Series is perfect for golf course maintenance, large estates, city recreation areas and sports fields. Sleek enough to get under trees and agile enough to turn on a dime, the AFM42 Series is just right for all around turf maintenance. And the quality of cut is the best feature of all.



Over center release easily takes tension off the drive belts during extended off time, or for belt replacement.





Anti-scalp rollers on nose and trailing edges of decks protect the deck as well as the turf.



Optional Hydraulic Wing Unlock allows user to unlock the wings from the tractor seat.



Low deck pivot allows for greater side to side flotation on the wing decks.

Horsepower	40-70 HP		
Hitch	Pull-Type, Adjustable Clevis & Safety Tow Chain		
Working Width (cm)	14' (427)	16' 8" (508)	
Overall Width	14' 3"	16' 10"	
Transport Width	7' 11'	8' 5"	
Positive Tongue Wt - Ib	540	580	
Weight - Ib (kg) (w/15" tires)	3,000 (1,361)	3,315 (1,504)	
Cutting Height	3/4" - 5-1/4"	in 1/4" Incr.	
Wing Cylinders	2-1/2" :	x 12"	
Rear Deck Cylinder	2-1/2"	x 8"	
Gearbox	540 RPM, 3 Wi	ng, 1 Splitter	
Decks: 3 each	60"	72"	
Deck Thickness	3/16)"	
Deck Overlap	6" 8"		
Deck Spindle Housing	Cast Iron Grea	seable Hubs	
Blade Size	5/16" x 2-1/2" x 20-29/32"	5/16" x 2-1/2" x 25"	
Blade Overlap	1-1/4"		
Blade Tip Speed	18,396 fpm 18,340 fpm		
Blade Bearings	Greaseable Ball Bearings		
Blade Spindles	1-3/8" Stressproof® Shaft		
Blade Spindle RPM	3,362 RPM 2,802 RPM		
Drive Train	540 RPM B-Section V Belt		
Discharge	Rear		
Deck Tires - 10 total	15 x 6.6 Air Tire, Sealant or 18 x 9.5 Air Tire, Sealant		
Deck Wheel Spindles	1-1/4" w/Nylon Bushings		
Transport Tires and Bearing	23 x 10.5, Sealant Tapered Bearings		
Anti-Scalp Roller	Front Center and Outside Deck Corners		
Input Driveline	Cat. 4 CV w/Slip Clutch		
Deck Driveline	Cat. 3		
Mowing capacity @2mph	3.39 Acres/hr	4.0 Acres/hr	
@4mph	6.78 Acres/hr	8.1 Acres/hr	
@6mph	10.17 Acres/hr	12.1 Acres/hr	
Flex - Wings	23° L-R, 22° F-B		
Flex - Center	10° L-R, 22° F-B		
Transport Lights	Standard		
Colors			

AFM4522 ALL-FLEX MOWER












Land Pride's AFM4522 All Flex Mower is a commercial mower that can easily mow over 10 acres per hour. Contractors can make quick work of turf areas like parks, sports complexes, and sod farms. The high blade tip speed will produce a quality cut in bermuda, fescue, or rye turf grasses. The narrow transport width allows access to area with ease, easily fitting through any 10' gate.

- · Anti-scalp rollers on each deck reduces turf damage
- 18" Deck tires with sealant mean fewer pounds per square inch
- Single C-section belt with spring-loaded belt tensioner on each deck
- Single beam tongue for tight turning radius
- Rear discharge decks for even dispersal
- Adjustable clevis hitch to fit various draw bar heights



The commercial duty 1-5/8" blade spindle features a cast iron housing, additional steel plate support, a 3/4" thick blade support bar and a remote greasing line.



Transport width of 9'6" allows for safe transport from site to site.



	AFM4522	
Horsepower	65-100 HP	
Hitch	Pull-Type, Adjustable Clevis & Safety Tow Chain	
Working Width (cm)	21' 9" (663)	
Overall Width	22'	
Transport Width	9' 6"	
Positive Tongue Wt - Ib	740	
Weight - Ib (kg)	4,150 (1,886)	
Cutting Height	3/4" - 5-1/4" in 1/4" Incr.	
Wing Cylinders	3-1/2" x 12"	
Rear Deck Cylinder	2-1/2" x 8"	
Gearbox	540 RPM, 3 Wing, 1 Splitter	
Decks: 3 each	90"	
Deck Thickness	3/16"	
Deck Overlap	4-1/2"	
Blade Hub	5 Bolt Casting	
Blade Size	5/16" x 2-1/2" x 31-17/32"	
Blade Overlap	2-1/4"	
Blade Tip Speed	18,498 fpm	
Blade Bearings	Greaseable Ball Bearings	
Blade Spindles	1-5/8" Stressproof® Shaft	
Blade Spindle RPM	2,241 RPM	
Blade Drive Belt	1 C-Section	
Discharge	Rear	
Deck Tires - 10 total	18 x 9.5 Air Tire, Sealant	
Deck Wheel Spindles	1-1/4" w/Nylon Bushings	
Transport Tires and Bearing	P27560SR, Tapered Bearings	
Anti-Scalp Roller	Front Center of Each Deck	
Input Driveline	Cat. 4 CV w/Slip Clutch	
Deck Driveline	Cat. 3	
Mowing capacity @2mph	5.27 Acres/hr	
@4mph	10.54 Acres/hr	
@6mph	15.82 Acres/hr	
Flex - Wings	23° L-R, 22° F-B	
Flex - Center	10° L-R, 22° F-B	
Transport Lights	Standard	
Colors		



FM25 SERIES FLAIL MOWERS







Sturdy and compact.

Land Pride's FM25 Series Flail Mowers are built for use in vineyards, orchards, and recreational areas and will fit a wide variety of tractors. The spring-loaded belt-tensioning system makes it easy to tension belts for longer life.

Cutting height is variable from 0" to 6". The rear access door and quick-change D-ring

system (Duckfoot knives only)

simplifies blade changes.



Optional brush rake teeth keep material in to pulverize it.



The dynamically balanced rotor is driven by a three section PowerBand® belt and mounted on spherical roller bearings.



Unique spring-loaded belttensioning system brings belt to proper tension by turning a nut. (N/A on 48")



Three different blade options make quick work of grass, grapevine shoots, saplings, and tree prunings.

l .		FM2548	FM2560	FM2572	FM2584
	Horsepower		30-80	O HP	
	Hitch	Cat	. 1	Cat. 1	1 & 2
	Weight - Ib (kg)	780 (354)	929 (421)	1,040 (472)	1,168 (530)
	Working Width (cm)	48" (122)	60" (152)	72" (183)	84" (213)
	Overall Width	60"	72"	84"	96"
	Drive Cover Height		33	3"	
	Rotor RPM		2,4	50	
	Gearbox Rating	80 HP	80 HP	80 HP	80 HP
3	Driveline		Cat	. 4	
	Offset Hitch	Center, 8	3" Right	Center, 10" Right	
*	Blade Tip Speed	12,046 fpm			
	Knives Attachment	D-Ring for Light Blades, C-Clamp for Heavy Blade			
Duckfoot Blades (Qty)		20	24	28	32
Heavy Y Blades (Qty)		24	32	40	48
H	Hammer Blades (Qty)	12	16	20	24
	Rotor Bearings		Spherical Ro	ller Bearing	
Ві	rush Rakes (optional)	6	8	9	11
	Rotor Diameter		5" with Reint	forcing Bars	
	Rotor Rotation	Reverse			
	Cutting Height	0"-6"			
	Cutting Capacity	Duckfoot Knives: 1" Heavy-Duty Y Knives: 1.5" Hammer Knives: 2"			
	Rear Roller Diameter	5.56"			
H	Hood/Deck Thickness	10 Gauge			
	Color				

PowerBand[®] is a Registered Trademark of the Gates Corporation



RCR12 SERIES SINGLE SPINDLE ROTARY CUTTERS









Ideal for cutting grass, weeds & light brush.

The RCR12 Series Rotary Cutter from Land Pride is an economical solution to grass maintenance on farms, rural areas, or vacant lots. The 1" cut capacity makes it a good solution for rough-cut areas that have small saplings and weeds. The RCR12 is a good match

for a subcompact or compact tractor up to 60 HP and features a fully-welded deck and

a 24" stump jumper.







10 Gauge stump jumper allows cutter to slide over obstructions protecting the gearbox output shaft.



Bolt on skid shoes are available as an accessory for the 60" & 72".



Floating 3-Point permits deck to follow the terrain.

	RCR1242	RCR1248	RCR1260	RCR1272	
Horsepower	18-40 HP	25-60 HP			
Hitch	Cat. 1, Quick-Hitch Ready				
Working Width (cm)	42" (107)	72" (183)			
Overall Width	45-1/4"	53-5/8"	64-1/4"	76-1/2"	
Overall Length	83"	89-1/8"	103-3/8"	114-1/2"	
Weight - lb (kg)	383 (174)	400 (181)	478 (217)	564 (256)	
Cutting Height		1-1/4"	- 10"		
Cutting Capacity		1" Diar	neter		
Deck Thickness	12 Gauge				
Deck Height	7-1/4"				
Safety Guards	Front and Rear Rubber Guards				
Skids	1/4" x 2" Weld On				
Blades	1/2" x 3" Heat Treated Alloy Steel Free Swinging Blades				
Blade Tip Speed	11,417 fpm 13,256 fpm 16,536 fpm 15,033 fpm				
Dishpan	Round 10 Ga. x 24" Diameter, Dish Shaped				
Gearbox Rating^	60 HP				
Gearbox	540 RPM, PTO Driven Gearbox, Cast Iron Housing				
Driveline	Cat. 3, Standard - 1/2" Shear Bolt Protection Optional - 2 Plate, Slip Clutch				
Tailwheel	15" Laminated Tire w/Cast Iron Hub				
Colors					





RCR15 SERIES SINGLE SPINDLE ROTARY CUTTERS







Cat. 1 & 1 Ltd.



Efficient handling and dispersing of material.

For small acreage owners looking for a heavier cutter, Land Pride offers the RCR1548. It features a 2" cutting capacity, a high blade tip speed, and larger gearbox than the RCR12. Ideal for maintenance of lanes, pastures, and other rough-cut areas.



Round back design helps discharge grass better than enclosed or partially enclosed cutters. The fully welded deck adds additional strength.



Two position floating top link offers greater lifting leverage for subcompact tractors, and allows deck to hug the terrain.



10 Gauge stump jumper allows cutter to slide over obstructions protecting the gearbox output shaft.



Heavy-duty 1-1/4" spindle on the tailwheel gives strength to protect the tailwheel assembly.

Horsepower	20-60 HP	
Hitch	Cat. 1 & Cat. 1 Limited	
Working Width (cm)	47-1/2" (121)	
Overall Width	53-1/2"	
Overall Length	91-3/4"	
Weight - Ib (kg)	424 (192)	
Cutting Height	1-3/4" - 11-1/2"	
Cutting Capacity	2" Diameter	
Deck Thickness	12 Gauge	
Deck Height	7-1/4"	
Safety Guards	Rubber Front and Rear	
Skids	1/4" x 2" Weld On	
Blades	1/2" x 3" Heat Treated Alloy Steel Free Swinging Blades	
Blade Tip Speed	13,090 fpm	
Dishpan	Round 10 Gauge x 24" Diameter, Dish Shaped	
Gearbox Rating^	65 HP	
Gearbox	540 RPM PTO Driven Gearbox Cast Iron Housing	
Driveline	Cat. 3, Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate Slip Clutch	
Tailwheel	4" x 16" Molded Rubber Tire	
Colors		



RCR18 SERIES SINGLE SPINDLE

ROTARY CUTTERS







Cat. 1



Ideal for cleaning around the farm, the pond, or empty lots in the city.

- Floating 3-Point allows deck to follow the terrain
- Fully-welded deck adds additional strength
- High blade tip speed ensures clean cut
- Single or dual tailwheel on 84"
- Heavy-duty tailwheel spindle
- All-welded formed channels front to rear add superior strength
- Lower clevises for easy hookup







Protect against flying debris with rubber or chain guards on the front and metal band on the rear.



Floating 3-Point allows for easy hook-up and permits deck to follow the terrain.



10 Gauge stump jumper with 1" thick blade bar slides over stumps, rocks and debris.

Horsepower	20 03111 +3 30111				
Hitch					
Working Width (cm)	57" (145)	69" (173)	84" (213)		
Overall Width	65"	77"	89"		
Overall Length	99-3/8"	110"	135"		
Weight - lb (kg)	599 (272)	737 (334)	851 (386)		
Cutting Height	1-1/2" - 13"	1-1/2" - 11-1/2"	2" - 11"		
Cutting Capacity		2" Diameter			
Deck Thickness		10 Gauge			
Deck Height	7-1/2"	9"	9-1/8"		
Safety Guards	Rubber or Chain, Rear Metal Band - Standard				
Skids	1/4" x 2" Weld On				
Blades	Heat Treated Alloy Steel Free Swinging Blades				
A TOP TO THE PROPERTY OF THE P	1/2" x 3"		1/2" x 4"		
Blade Tip Speed	16,363 fpm 14,853 fpm		17,113 fpm		
Dishpan	Round 10 Gauge x 24" Diameter, Dish Shaped		Oval 10 Gauge, Dish Shaped		
Gearbox Rating^	65 HP		130 HP		
Gearbox	540 RPM, PTO Driven Gearbox				
Driveline	Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate Slip Clutch				
	Cat. 3		Cat. 4		
Tailwheel	4" x 16" Solid Rubber Tire, Cast Iron Hub		4" x 8" x 15" Laminated Tire or Fual Laminated Optional, Cast Iron Hub		
Colors	S				
		Ошек Итс	11		





RCF20 SERIES SINGLE SPINDLE ROTARY CUTTERS









Cat. 1 & 2



The ideal cutter for rural grass maintenance in a smooth top design.

- Smooth top for easier cleaning
- ASABE Category 3 driveline
- Fully-welded deck
- Available rubber or chain guards front and rear
- High blade tip speed
- 84" Features single or dual tailwheel option





Cast floating top link follows ground undulations.



10 Gauge stump jumper with 1" thick blade bar slides over stumps, rocks and debris.



Extended cutter front allows for increased material flow and added protection.

	Horsepower	20-6	5 HP	45-90 HP	
	Hitch	Cat. 1 - Floati Clevis Type L QH Ada	ower Links,	Cat. 1 & 2 Floating Top Link, Clevis Type Lower Links, QH Adaptable	
	Working Width (cm)	60 (152)	72 (183)	84 (213)	
	Overall Width	65"	77"	89"	
	Overall Length	98"	109-1/2"	Single: 133"; Dual 126"	
	Weight - lb (kg)	620 (281)	745 (338)	Sgl Tailwheel: 1,047 (475) Dual Tailwheel: 1,155 (524)	
	Cutting Height		1-1/2" - 12"		
	Cutting Capacity	2" Diameter			
4	Deck Thickness		10 Ga	auge	
	Deck Height	9-11/16"	11"	11-15/16"	
1	Safety Guards	F	Rear Metal Ban	ding - Standard	
	Optional Guarding	Front: Ru	ubber or Chain;	Rear: Rubber or Chain	
	Skids	Weld-On (E	Bolt-On Access	ory Skid Shoes Available)	
	Blades	2 e (1/2" x 3" He Free Swingi	at Treated)	2 ea. (1/2" x 4" Heat Treated) Free Swinging High-Lift	
	Blade Tip Speed	16,363 fpm	14,955 fpm	17,113 fpm	
	Dishpan	Round, 10 Ga Dish Sl		Oval, 3/16" x 27"	
	Gearbox Rating [^]	65	HP	130 HP	
	Gearbox	540 RP	M, Beveled Ge	ars, Cast Iron Housing	
	Driveline	Cat. 3; Sh or 2-Plate S		Cat. 4; 2-Plate Slip Clutch	
	Tailwheels	4" x 15" Lamii 4" x 16" Mold 360° S	led Rubber -	Single or Dual 4" x 15" Laminated Tire w/Cast Iron Hub - 360° Swivel	
	Colors				



RCR26 SERIES SINGLE SPINDLE

ROTARY CUTTERS











Roundback design allows for more efficient handling and dispersing of material.

Land Pride's 26 Series Rotary Cutters are a good choice for use around the farm, keeping the horse pastures under control, maintaining lanes, or clearing rough areas. The 3" cutting capacity also allows it to be the choice of many municipalities from parks to easement control applications.

- Full length skids with replaceable shoes
- Clevis hitch for easy hook-up
- Rugged laminated tailwheel
- Fully welded deck
- 3-Pt. with dual 15" tailwheels on 84"





3/16" Dishpan with 1" x 4" blade bar provides superior strength for encountering objects in the blade path. Round on 60" & 72"; oval on 84".

Horsepower	35-13	0 HP	60-130 HP
Hitch	Cat.	1 & 2	Cat. 2 & 3
Working Width (cm)	60" (154)	72" (183)	84" (213)
Overall Width	67"	79"	90-3/4"
Overall Length	114"	126"	Single 133", Dual 116"
Weight - Ib (kg)	1,002 (454)	1,046 (474)	1,370 (621) Single Gauge Wheel, 1500 (680) Dual Gauge Wheel
Deck Thickness		10 Gauge	
Cutting Height		2"-12"	
Cutting Capacity		3" Diameter	
Safety Guards	Front: Chain; Rear: Single of		or Double Chain
Skids	Full Le	ngth Weld & Repla	ceable Shoes
Deck Height	9-1	/8"	10-1/8"
Blades	1/2"	x 4" Heat Treated Free Swinging B	
Blade Tip Speed	12,384 fpm	14,861 fpm	14,369 fpm
Dishpan	3/16" x 24" Round, Dish Shaped	3/16" x 30-1/2" Round, Dish Shaped	3/16" x 24" x 38" Oval, Dish Shaped
Gearbox Rating^		130 HP	
Gearbox	540 F	3/8" 6 Spline ing	
Driveline	Cat. 4 4-Plate Slip Clutch		
Tailwheel	4" x 8" x 15" Laminated Tire Cast Iron Hub		
Colors		0	





RCF27 SERIES SINGLE SPINDLE











Roundback with a Smooth Top.

The RCF27 Series Rotary Cutter is a smooth top version of our RCR26 Series, offering the same great cut and is ideal for grass, weeds, crops, brush, and small trees up to 3 inches in diameter. These units come equipped standard with a 3/16" thick heavy-duty stump jumper and replaceable bolt-on skid shoes.



- Smooth top design
- All welded deck
- Clevis style lower hitch
- Floating top hitch
- 84" Pull-type model available
- Dual wheels optional on 3-Point 84" model, Standard on Pull-Type





Replaceable bolt-on skid shoes provide sidewall reinforcement and protection to the bottom of sidewall.



Optional shields are available for the front and rear to protect against flying debris.



The laminated tailwheel is long lasting in rough conditions and 1-1/2" heavyduty spindle protects the assembly.

	RCF2760	RCF2772	RCF2784
Horsepower	35-13	80 HP	60-130 HP
Hitch	Cat.	1 & 2	Cat. 2 & 3, Pull-Type
Working Width	60" (152)	72 (183)	84 (213)
Overall Width	67"	79"	89"
Overall Length	109"	121-3/4"	Single 132.5", Dual 130"
Weight - lb (kg)	955 (433)	1,072 (486)	1,354 (614), Pull-Type: 1632 (740)
Cutting Height		2"	
Cutting Capacity	3" Diameter		
Deck	All Welded, Smooth Top		
Deck Thickness		10 Gaug	je
Deck Height	11-1	11-1/4"	
Side Thickness	1/4"		
Safety Guards	Front: Chain or Rubber, Rear: Chain		
Skids		Replacea	ble
Blades	I	Free Swinging Hi 1/2" x 4" - Heat	
Blade Bolt		Keyed with Ha Flat Washer &	
Blade Tip Speed	12,384 fpm	14,861 fpm	14,369 fpm
Dishpan	3/16" x 24" Round, Dish Shaped	3/16" x 30-1/2" Round, Dish Shaped	3/16" x 24" x 38" Oval, Dish Shaped
Gearbox Rating^		130 HF	
Gearbox		540 RPI 1-3/8" - 6 S	
Gearbox Output Shaft		2"	
Driveline	(Cat. 4 with 4 Plate	Slip Clutch
Tailwheel(s)	15	" Laminated, w/C Tapered Roller	
Colors			



RCF36 SERIES SINGLE SPINDLE










Cat. 1, 2 & 3





Our RCF36 Series Rotary Cutter is a Brute!

This cutter features a 190 HP gearbox capable of many land clearing tasks including heavy grass and weeds, row crop stubble, thick brush, and small trees up to 4" in diameter.

- Replaceable skid shoes
- · Smooth top design
- All welded deck
- Reinforced rear chain guard
- Heavy-duty tailwheel mount
- Floating top hitch
- Pull-type available in 84" model





Tailwheels take a beating but the 1-1/2" heavy-duty spindle gives the strength to protect it.



Optional Shredder Kit makes quick work of prunings and crop residue.



Working Width (cm) T2" (183) Verall Width Weight - Ib (kg) Deck Deck Tick Height Side Thickness Safety Guards (Choose) Rear: Single or Double Chains or Band Skids Replaceable Blade Bolt Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed Dishpan J(18 - 19 - 19 - 19 - 19 - 19 - 19 - 19 -	4	noisepowei	60-190 HP	Pull: 50-190 HP		
Overall Width Overall Length 124-3/4" Pull 130", 179-1/2" Pull Weight - Ib (kg) 1,337 (606) 2,000 (907), Pull-Type 2,104 (954) Cutting Height 2" - 12" Cutting Capacity All Welded, Smooth Top Deck Thickness 3/16" Deck Height 13-3/8" Side Thickness 1/4" Safety Guards (Choose) Rear: Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ Gearbox Output Shaft 2-3/8" Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type		Hitch	Cat. 1 & 2	,		
Overall Length Weight - Ib (kg) 1,337 (606) 2,000 (907), Pull-Type 2,104 (954) Cutting Height 2" - 12" Cutting Capacity 4" Diameter Deck All Welded, Smooth Top Deck Height 13-3/8" Side Thickness 1/4" Safety Guards (Choose) Rear: Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ Gearbox Output Shaft 2-3/8" Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	Workin	ng Width (cm)	72" (183)	84" (213)		
Weight - Ib (kg) 1,337 (606) 2,000 (907), Pull-Type 2,104 (954) Cutting Height 2" - 12" Cutting Capacity 4" Diameter All Welded, Smooth Top 3/16" Deck Height 13-3/8" Side Thickness 1/4" Safety Guards (Choose) Rear: Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm 2/16" x 30-7/16", Round, Dish Shaped Gearbox Rating Gearbox Output Shaft 2-3/8" Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	(Overall Width	78-1/2"	90-1/2"		
Cutting Height Cutting Capacity Beck All Welded, Smooth Top Jeck Thickness Jeck Height Safety Guards (Choose) Blades Blades Blades Front: Rubber, Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Tip Speed Jishpan Jishpan Jishpan Jishpan Jishpan Jishpan Jishyan Gearbox Rating^ Gearbox Output Shaft Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) Time Market All (954) Pull-Type 2,104 (954) All Welded, Smooth Top All Welded, Smooth Top Jishyan 1,33/8" Front: Rubber, Single or Double Chains, Rear: Single or Double Chains,	0	verall Length	124-3/4" Pull	130", 179-1/2" Pull		
Cutting Capacity Deck All Welded, Smooth Top 3/16" Deck Height 13-3/8" Side Thickness 1/4" Safety Guards (Choose) Rear: Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ Gearbox Output Shaft Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	W	eight - Ib (kg)	1,337 (606)			
Deck Thickness 3/16" Deck Height 13-3/8" Side Thickness 1/4" Safety Guards (Choose) Rear: Single or Double Chains, Rear: Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ 190 HP Gearbox Output Shaft 2-3/8" Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) Tailwheel(s)	С	utting Height	2" -	12"		
Deck Thickness Deck Height 13-3/8" Side Thickness 1/4" Safety Guards (Choose) Rear: Single or Double Chains, or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ 190 HP Gearbox Output Shaft 2-3/8" Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	Cut	ting Capacity	4" Dia	meter		
Deck Height Side Thickness 1/4" Safety Guards (Choose) Rear: Single or Double Chains, Rear: Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ 190 HP Gearbox Output Shaft 2-3/8" Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type		Deck	All Welded,	Smooth Top		
Side Thickness Safety Guards (Choose) Rear: Single or Double Chains, Rear: Single or Double Chains, Rear: Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ Gearbox 190 HP Gearbox Output Shaft 2-3/8" Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	De	eck Thickness	3/1	3/16"		
Safety Guards (Choose) Front: Rubber, Single or Double Chains, Rear: Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ 190 HP Gearbox Output Shaft 2-3/8" Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type		Deck Height	13-3	8/8"		
Rear: Single or Double Chains or Band Skids Replaceable Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ 190 HP Gearbox 540 RPM, 1-3/4" - 20 Spline Gearbox Output Shaft 2-3/8" Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	Si	de Thickness	1/4"			
Blades Free Swinging High Lift, 1/2" x 4", Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ 190 HP Gearbox 540 RPM, 1-3/4" - 20 Spline Gearbox Output Shaft 2-3/8" Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	S					
Heat Treated Steel Blade Bolt Keyed with Hardened, Flat Washer & Lock Nut Blade Tip Speed 14,369 fpm Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ 190 HP Gearbox Output Shaft 2-3/8" Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type		Skids	Replac	ceable		
Blade Tip Speed Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ 190 HP Gearbox 540 RPM, 1-3/4" - 20 Spline Gearbox Output Shaft 2-3/8" Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type		Blades				
Dishpan 3/16" x 30-7/16", Round, Dish Shaped Gearbox Rating^ 190 HP Gearbox 540 RPM, 1-3/4" - 20 Spline Gearbox Output Shaft 2-3/8" Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type		Blade Bolt	Keyed with Hardened,	Flat Washer & Lock Nut		
Gearbox Rating^ 190 HP Gearbox 540 RPM, 1-3/4" - 20 Spline Gearbox Output Shaft 2-3/8" Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	Bla	de Tip Speed	14,36	9 fpm		
Gearbox 540 RPM, 1-3/4" - 20 Spline Gearbox Output Shaft 2-3/8" Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type		Dishpan	3/16" x 30-7/16", Ro	ound, Dish Shaped		
Gearbox Output Shaft Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	Gea	arbox Rating^	190	HP		
Driveline Cat. 5 with 4 Plate Slip Clutch Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type		Gearbox	540 RPM, 1-3/	4" - 20 Spline		
Tailwheel(s) 15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings, 21" on Pull-Type	Gearbox	Output Shaft	2-3	1/8"		
Bearings, 21" on Pull-Type		Driveline	Cat. 5 with 4 P	late Slip Clutch		
Colors		Tailwheel(s)				
		Colors				





RCD18 SERIES OFFSET ROTARY CUTTERS







35-60 HP

1-1/2" Cat. 1



Right for the Job.

The RCD1884 is a smooth-top, offset cutter that performs best in grass-only applications. Being dual spindle, the cutter is shorter in length than single spindle 84" cutters; the reduced length allows for better maneuverability in tight spaces. The 10" offset makes the RCD1884 a good solution for applications that require cutting close to buildings, fences, or other obstacles that might be found in orchards, parks, or rights-of-way.

- Deep-deck design
- All-welded deck
- Short coupled for tight spaces
- Clevis-style hitches for easy hook-up



Hitch offsets 10" to the right to cover your tractor tire and get closer to obstructions.



Dual gearboxes allow lower horsepower tractors to cut 84" swaths.



Intermediate driveline transfers loads from center box to wing box to ensure proper cut quality.

	RCD1884
Horsepower	35-60 HP
Hitch	Cat. 1 QH
Working Width (cm)	84" (213)
Overall Width	86.5"
Overall Length	80.5"
Weight - Ib (kg)	900 (408)
Cutting Height	2"-12"
Cutting Capacity	1-1/2" Diameter
Offset	10"
Deck	All Welded
Deck Thickness	10 Gauge
Deck Height	11-5/8"
Safety Guards	Front: Rubber or Chain Rear: Metal Band
Skids	Weld-On
Additional Skids	Bolt-On
Blades	2 Each, 1/2" x 4" x 16" Heat Treated Free Swinging Alloy Steel Suction Blades
Blade Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Tip Speed	11,693 fpm
Dishpan	10 Ga. x 24", Round, Dish Shaped
Gearbox Rating^	90 HP Main; 45 HP Side
Gearbox	540 RPM, Beveled Gears, Cast Iron Housing
Driveline	Cat. 3 with 2-Plate Slip Clutch
Tailwheels	15" Laminated Tire or 4" x 16" Molded Rubber
Colors	



RCR25 SERIES DUAL SPINDLE

ROTARY CUTTERS









A perfect fit for any size farm.

The RCR25 Series is well-suited for medium sized chores and is designed for performance in pastures, set aside acres, roadsides, and routine farm maintenance.

Pull-Type: The Pull-Type model features two leveling rods that connect the rear axle to the front tongue. This enables the deck to stay level over uneven ground conditions. The height controlling axle cylinder is attached to two deck springs that help cushion the cutter in rough terrain. A narrow tongue on Pull-Type allows for tight turns.

3-Point: The 3-Point unit utilizes two castering laminated tailwheels for smooth, trouble-free performance. The easy to attach clevis hitch is designed to fit Cat. 1 or 2 tractors on the 96" model, and Cat. 2 or 3 tractors on the 10' model.

 Slip clutch and impact absorbing cross shafts to outer gearboxes

Constant Velocity U-Joint option on 10' Pull-Type

Slip clutch protection on main driveline

Fully welded 10 Gauge deck

Round back design

Chain or rubber shield option

Replaceable skid shoes

• 1" x 4" Blade bar



		RCR2596	RCR2510	
	Horsepower	Pull: 40-110 HP 3-Pt: 50-110 HP	Pull: 50-110 HP 3-Pt: 60-110 HP	
	Hitch	Cat. 1 & 2	Cat. 2 & 3	
Wo	orking Width (cm)	7'10" (239)	9'10" (300)	
Overall Width Overall Length		8'3-3/4"	10'3-1/2"	
		Lift - 8'10", Pull - 11'8-3/4"	Lift - 9'4", Pull - 12'6"	
	Weight - lb (kg)	3-Pt: 1,380 (625) Pull: 1,665 (755)	3-Pt: 1,750 (793) Pull: 2,035 (923)	
	Deck Thickness	10 Gau	uge	
	Deck Height	9-5/8	8"	
*Safety Guards (choose)		Front: Rubber or Chain Rear: Rubber or Chain		
	Skids	Replaceable		
	Gearbox Rating [^]	210 HP Splitter 90 HP Outboard		
	Gearbox	540 rpm, Cast Iron Housing, Beveled Gears		
- 300	Cutting Height	2" - 12"	2" - 10-1/2"	
	Cutting Capacity	1-1/2" Dia	meter	
	Blades	1/2" x 4" Heat Treated, Free-Swinging Suction Blades		
	Blade Tip Speed	14,592 fpm	17,749 fpm	
	Dishpan	3/16", Round, E	Dish Shaped	
0 /	Driveline	Plate Slip Clutch		
	Tailwheel	Lift-Type: 2 Each, 4" x 8" x 15-1/4" Laminated Pull-Type: 2 Each, 6" x 9" x 21" Laminated or 24" Aircraft Tires		
Colors				





RCF30 SERIES DUAL SPINDLE ROTARY CUTTERS







40-110 HP 2-1/2"





Performance in a Medium-Duty Cutter.

The RCF30 Series is the perfect medium-duty cutter for pastures and roadside applications. Available in 3-Point, semi-mount or pull-type, the RCF30 features a 2-1/2" cutting capacity and 1/4" side skirts. Plus, every RCF30 comes with the rugged dependability that Land Pride Rotary Cutters are known for.

3-Point with dual beam axle



Dual heavy-duty standard stump jumpers aide in sliding over obstructions which helps protect the gearbox output shaft.



Land P

Splined rubber flex-couplers between the center and outboard gearboxes protect the driveline and gearboxes from shock loads.



	11013030	11013010
Horsepower	3-Pt: 50-110 HP Semi & Pull: 40-110 HP	3-Pt: 60-110 HP Semi & Pull: 50-110 HP
Hitch	Cat. 1 & 2 QH	Cat. 2 & 3 QH
Working Width (cm)	8' (244)	10' (305)
Overall Width	8'7"	10'6-1/2"
Overall Length (3-Pt w/Twin Beam Axle)	102"	122"
Weight - Ib (kg) (3-Pt w/Twin Beam Axle)	1,587 (720)	2,004 (909)
Deck Thickness	10 G	auge
Side Skirt Thickness	1/	4"
Gearbox Rating^	Outboard: 130 H	IP, Center 210 HP
Gearbox	540 RPM	540 RPM or 1,000 RPM
Cutting Height	2" -	- 12"
Cutting Capacity	2-1/2" [Diameter
Shielding		in or Double Chain in or Double Chain
Skids	Repla	ceable
Deck Height	11-1/4"	11-1/2"
Blades		eated Alloy Steel ging Blades
Blade Tip Speed	16,360 fpm	540: 17,100 fpm; 1000: 17,300 fpm
Dishpan	3/16" Round,	Dish Shaped
Driveline		i-Mount: Cat. 4 Equal Angle or CV
Driveline Protection		mpact Absorbing Outer Gearboxes
Tailwheels	Pull-Type: 21" Laminat or 29" Air	21" Laminated ted, 24.5" Foam Filled, craft Tires or 21" Laminated

Colors



RCF36 SERIES DUAL SPINDLE

ROTARY CUTTERS











Bigger and Better.

The RCF36 Series are heavy-duty dual spindle cutters with a 3" cut capacity. This rotary cutter is made for pasture maintenance, roadside mowing, and land clearing in reclamation projects. The 210 HP gearboxes are protected from damage by the slip clutch on the main driveline and impact absorbing flex couplers on the connecting drivelines. The features on this unit add up to a bigger, better cutter.

- · Single or dual tires
- 3 Tire options
- · 3 Axle options







RCFM4014

Land Pride offers a three spindle extra heavy duty RCFM4014 for row crop shredding. Visit www.landpride.com for complete specifications.








HITCH OPTIONS ROTARY CUTTERS



Swivel Clevis

Swivels



Self-Leveling Hitch

• Self-leveling



LP Performance Hitch

- Self-leveling
- Swivels up and down, and rotates side to side for uneven terrain
- Held upright by hitch pin to allow for single person hook-up
- Reduces drawbar wear



Ball Hitch

• Swivels over the 2-5/16" tractor mounted ball



Pintle Hitch

- Swivels on the pintle connection
- Ideal for a drawbar hammer strap



Bar-Tite[™] Clevis

- · Bolts tight to drawbar which eliminates any drawbar wear
- Hardened bushing with grease zerk on side to side movement
- Swivels up and down
- Grease zerk on rotating shaft
- Heat treated components

Not all hitches are available on all cutters. See dealer for details.

RC2512 12' FOLDING **ROTARY CUTTERS**











40-100 HP Horsepower Hitch Pull-Type; Standard Clevis, LP Performance Self-Leveling Working Width (cm) 12' (366) **Overall Width** 12'7" 7'11" Min. Transport Width **Overall Length** 13'3" Machine Weight - lb (kg) 2,540 (1152) **Cutting Height** 1-1/2" - 12"

Mow Like the Big Boys!

Designed with smaller tractors and smaller acres in mind, our 12' Rotary Cutter is packed with a lot of the features found in our larger folding cutters. The 12' width, tight turning radius, and low tongue weight makes this an ideal rotary cutter for compact tractor owners.





Center spring on the cylinder cushions load on drawbar.



Dual leveling rods enable the cutter to pull equally on the rear axle during travel over rough terrain.



Narrow tongue design handles tight turns - great size for country estates.

Cutting Capacity		1-1/2" Diameter	
Tongue Weight - Ib		793	
Max.	Turning Angle	80° with CV	
Deck Height		11"	
D	eck Thickness	10 Gauge	
Suspension		Spring on Center Deck	
	Deck Rings	N/A	
Side Pa	nel Thickness	3/16"	
Chain Guards Front & Rear		Standard	
	Skid Shoes	Wings & Center, Replaceable	
	Blades	1/2" x 3" Uplift	
	Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut	
Blade Tip	540 Center	16,500 fpm,	
Speed (Feet per minute)	Wings	16,000 fpm	
	Blade Overlap	6"	
	Dishpan	10 Gauge, Round, Dish Shaped with 1" x 3-1/2" Blade Bar	
Hydraulics	Wings	2" x 8"	
nyuraulics	Center	2-1/2" x 8"	
Ge	earbox Rating^	540 RPM: 160 HP Divider; 100 HP Center & Wings	
Gearbo	x Output Shaft	1-1/2"	
Gearb	ox Input Shaft	1-3/8" 6 Spline	
ı	nput Driveline	Cat. 4 CV	
Connect	ting Drivelines	Cat. 3 Slip Clutch	
	Tires	21" Laminated Tires or 20.5" Aircraft Tires	
Tr	ansport Lights	Standard	
	Color Options		

RC2515 15' FOLDING **ROTARY CUTTERS**

Suspension

Deck Rings

Chain Guards

Front & Rear

Skid Shoes

Blades

Blade Bolt

540 Center

Blade Overlap

Wings

Dishpan

Wings

Center Gearbox Rating^

Gearbox Output Shaft

Gearbox Input Shaft

Input Driveline **Connecting Drivelines**

Transport Lights

Color Options

Tires

Side Panel Thickness

Blade Tip

Speed (Feet per

minute)

Hydraulics

Spring on Center Deck

N/A

1/4"

Standard

Wings & Center,

Replaceable

1/2" x 4" Uplift

Keyed with Hardened

Flatwasher & Lock Nut

15,000 fpm

15,000 fpm

10 Gauge, Round, Dish Shaped

with 1" x 4" Blade Bar

2-1/2" x 10"

2-1/2" x 8"

540 RPM: 160 HP Divider; 100 HP Center & Wings

1-5/8"

1-3/8" 6 Spline Cat. 4 CV

Cat. 3 Slip Clutch


21" Laminated Tires or 29" Aircraft Tires

Standard







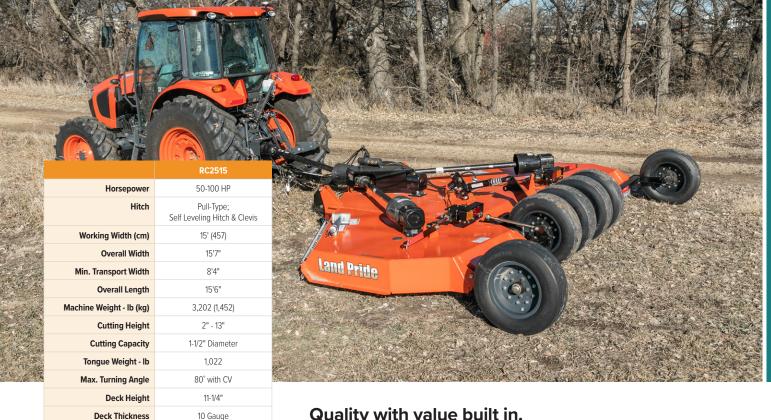

Quality with value built in.

Land Pride has packaged our renowned quality and dependability into an economy 15' Cutter. With a 1 year hitch-to-tailwheel warranty, plus a 5 year gearbox warranty, the RC2515 will give you years of dependable service and acres and acres of cut grass.





Wings are leveled with easy-to-access and easy-toadjust turnbuckles.



All three connecting drivelines offer two-plate slip clutch protection.



Deck-mounted spring cushion provides a smooth ride in rough terrain.

RC3712 12' FOLDING **ROTARY CUTTERS**













Tough Enough.

The RC3712 Folding Rotary Cutter expands on the popularity of our RC2512 by offering a heavy duty 12-foot cutter. It features a 3" cutting capacity with a cut height of 1.25" to 14". The cutter is available for 540 or 1000 RPM

tractors, with 4 or 6 tires in 3 sizes, and 5 hitch options.

Standard equipment includes transportation lights, wing transport locks and replaceable skid shoes.





Greaseable hinged wing sections have 1" solid hinge rods and allow the cutter to follow rough ground, alleviating uneven cutting.



Beveled skid shoes on wings reduces gouging of the ground when turning.



3/16" Thick stump jumper protects the gearbox output shaft.



Color Options

GALVANIZED OFFSET/FOLDING **ROTARY CUTTERS**













Durability for corrosive environments.

The RCG Series galvanized models are identical to their painted counterparts in options and specifications. Land Pride's hot-dipped galvanized coating will add durability to our already durable cutters and provide a tough, rust-resistant coating. For corrosive environments, it adds another option to make Land Pride cutters some of





the best in the industry.

The durability of our RCG units will be backed up by a 10-year Rust-Through Deck Warranty.







Individual wheel spindles can be replaced when damaged without replacing the entire axle assembly.



Grease zerks on end caps of intermediate and wing drivelines for ease of maintenance.



Hot-dipped zinc galvanized deck offers durable rust protection for harsh conditions and corrosive environments.

RCG(M)3712 RCG(M)3715 RCG(M)4715

The RCG Series galvanized models are identical to their painted counterparts in options and specifications - see corresponding product pages for details.

RC3715 15' FOLDING ROTARY CUTTERS









Pull-Type



Tame the Plains.

The RC3715 is identical to the RC3712, simply 3 feet wider. It features a 3" cutting capacity, 12" deep deck, 1/4" side skirts, and is available in 540 or 1000 RPM. The tire offering on the RC3715 is expanded to 4, 6, or 8 tires in 4 sizes, including our new 26" laminated tire. Height adjustment utilizes flip over spacers as opposed to the donuts commonly used by competitors.

The blades are $\frac{1}{2}$ " x 4" with a 6" overlap.





Fold options allow for narrow transport or independent control of the wings.



Sliding center shield offers ease-of maintenance for slipclutches and U-joints.



Optional deck rings keep blades from damaging the cutter deck.

		RC3713 HEAV1-DOT1
Horsepower		50-160 HP
Hitch		Pull-Type; Standard Swivel Clevis, LP Performance Self-Leveling, Ball, Pintle, or Bar-Tite Hitch
Work	ing Width (cm)	15' (457)
	Overall Width	15'10"
Min. Tı	ransport Width	10'3"; 7'3" w/Narrow Option
Overall Length		16'3"
Machine Weight - lb (kg)		4,380 (1,987)
	Cutting Height	1-1/2" - 16" **
Cı	ıtting Capacity	3" Diameter
Tong	gue Weight - Ib	1,594
Max.	Turning Angle	80° with CV
	Deck Height	12"
D	eck Thickness	10 Gauge
	Suspension	Spring Cushioned Center Axle
	Deck Rings	Optional
Side Pa	anel Thickness	1/4"
	Chain Guards Front & Rear	Single - Standard Double - Optional
	Skid Shoes	Wings & Center, Replaceable, Beveled
Blades		1/2" x 4" Uplift
Blade Bolt		Keyed with Hardened Flatwasher & Lock Nut
	540 Center	15,268 fpm
Blade Tip Speed	Wings	15,000 fpm
(Feet per minute)	1000 Center	15,768 fpm
minute	Wings	14,620 fpm
	Blade Overlap	6"
13	Dishpan	3/16" Round, Dish Shaped, w/1" x 4" Blade Bar
Hydraulics	Wings	2-1/2" x 12"
riyurdulics	Center	3" x 8"
Ge	earbox Rating^	540 or 1000 RPM: 160 HP Divider; 130 HP Center & Wings
Gearbox Output Shaft		2"
Gearbox Input Shaft		1-3/4" 20 Spline
	Input Driveline	Cat. 6 CV
Connec	ting Drivelines	Cat. 4 Slip Clutch
	Tires	21" or 26" Laminated, 29" Used Aircraft, 25.5" Aircraft, or 24" Foam-Filled
Tr	ansport Lights	Standard



Color Options

RC4715 15' FOLDING ROTARY CUTTERS

Horsepower





Pull-Type

55-250 HP

Dull Type:



Make pasture and roadside maintenance a simple and efficient task.

The RC4715 is a heavy-duty folding rotary cutter with a 4" cutting capacity and 15' cutting width designed to make pasture and roadside maintenance a simple and efficient task. The unit comes with ease of maintenance features that you've come to expect from Land Pride like greaseless pivot points, endcap grease zerks, easy-off shields and a patented sliding guard over the splitter gearbox, making maintenance easy to perform. There are multiple axle options, including Land Pride's parallel pivot that gives you unmatched ground contact for improved holding power on hills and inclines, as well as 5 tire options in 6 or 8 tire configurations.



Land Pride's patent pending parallel pivot axle gives you unmatched ground contact for improved holding power on hills and inclines.





Spring cushioned axles improve ride and are available options on both center and wing axles.



Easy-off shields and a patented sliding guard over the splitter gearbox make maintenance easy to perform.



Forged diamond blade bar provides strength where it's needed most.

	Hitch	Pull-Type; Standard Swivel Clevis,	
		LP Performance Self-Leveling,	
		Ball, Pintle, or Bar-Tite Hitch	
Wo	rking Width (cm)	15' (457)	
Overall Width		15' 10"	
Min.	Transport Width	7'3"	
Overall Length		16'3"	
Machine Weight - Ib (kg)		5,000 (2,268)	
	Cutting Height	1-1/2" - 16" **	
(Cutting Capacity	4" Diameter	
То	ngue Weight - Ib	1,860	
Ma	x. Turning Angle	80° with CV	
	Deck Height	12"	
	Deck Thickness	10 Gauge	
	Suspension	Spring Cushioned Center Axle	
	Deck Rings	Optional	
Side	Panel Thickness	1/4"	
	Chain Guards Front & Rear	Single - Standard Double - Optional	
Skid Shoes		Wings and Center, Beplaceable, Beveled	
Blades		1/2" x 4" Uplift	
Blade Bolt		Keyed with Hardened Flatwasher & Lock Nut	
	540 Center	16,300 fpm	
Blade Tip Speed	Wings	16,300 fpm	
(Feet per minute)	1000 Center	16,300 fpm	
miliate	Wings	16,000 fpm	
	Blade Overlap	6"	
	Dishpan	Forged Diamond Blade Bar; Optional 3/16" Round Dishpan	
Hydraulics	Wings	2-1/2" x 12"	
nyuraulics	Center	3" x 8"	
,	Gearbox Rating^	540 or 1000 RPM: 250 HP Divider, 210 HP Center & Wings	
Geart	oox Output Shaft	2-3/8"	
Gea	rbox Input Shaft	1-3/4" 20 Spline	
	Input Driveline	Cat. 6 CV	
Conne	ecting Drivelines	Cat. 4 or Cat. 5 Slip Clutch	
	Tires	21" or 26" Laminated, 29" Used Aircraft 24" Foam-Filled	
	Transport Lights	Standard	
	Color Options		
		www.landpride.com	

RC5715 15' FOLDING **ROTARY CUTTERS**







RC5715 HEAVY DUTY





The RC5715 beats the competition.

Land Pride's new RC57 Series is feature-rich and engineered to be the premier roadside Rotary Cutter. Features like sliding shields, end-cap grease zerks on drivelines, maintenance free pivots, an oil level site gauge on gearboxes, and replaceable side skirts make the RC5715 one of the easiest rotary cutters to maintain. The Pre-Cut Chamber allows material to spring back up before being cut, giving a cleaner, more precise finish. Compare Land Pride's serviceability and patented features against the competition and you will agree that the RC5715 is the new standard in heavy-duty Folding Rotary Cutters.



Patented Deck Armor™ is an additional layer of steel which increases durability reducing the possibility of deck damage from blade to deck contact without reducing cut quality.





Patented Parallel Pivot™ axles give you unmatched ground contact for improved holding power on hills and inclines.



Patented sliding center shield offers access for ease-of-maintenance of slip clutches and U-joints.



Convenient flip spacers speed height adjustment and eliminate the need for donut-style spacers which can easily be lost

1		Horsepower	60-250 HP	
		Hitch	Pull-Type; Constant Level Swivel Clevis, LP Performance Self-Leveling, Ball, Pintle, Bar-Tite	
	Working Width (cm)		15' (457)	
V	Overall Width		16'	
	Min. Transport Width		7' 3"	
	Overall Length		16'3"	
A COLUMN	Machin	e Weight - lb (kg)	5,446 (2,470)	
		Cutting Height	1-1/2" - 16" **	
1		Cutting Capacity	5" Diameter	
X	To	ongue Weight - Ib	2,200	
	Ma	ax. Turning Angle	80° with CV	
		Deck Height	12"	
7		Deck Thickness	7 Gauge Bottom; 10 Gauge Top	
100		Suspension	Various Options	
		Deck Rings	Deck Rings or DeckArmor™ Optional	
e de	Side	Panel Thickness	1/4" Replaceable	
		Chain Guards Front & Rear	Single - Standard Double - Optional	
		Skid Shoes	AR400 Wings and Center, Replaceable, Beveled 1/2" x 4" Uplift Keyed with Hardened Flatwasher & Lock Nut	
		Blades		
		Blade Bolt		
	540 Center		16,400 fpm	
	Blade Tip Speed	Wings	16,400 fpm	
	(Feet per minute)	1000 Center	16,400 fpm	
	illitate	Wings	16,000 fpm	
		Blade Overlap	6"	
		Dishpan	Forged Diamond Blade Bar; Optional 3/16" Round Bolt-on Dishpan, Optional HD Blade Bar & Dishpans	
	Hydraulics	Wings	3" x 8"	
	riyurdulics	Center	3-1/2" x 8"	
	Gearbox Rating [^] Gearbox Output Shaft		540 or 1000 RPM: 250 HP Divider, 225 HP Center & Wings	
			3"	
	Gea	arbox Input Shaft	1-3/8" or 1-3/4" 20 Spline	
		Input Driveline	Cat. 6 CV	
	Conn	ecting Drivelines	Cat. 4 or Cat. 5 Slip Clutch	
230		Tires	21" or 26" Laminated, 29" Used Aircraft, or 25.5" Foam-Filled	
Ø	IC	Transport Lights	Standard	
11	ıu	ansport Lights	Standard	



Color Options

RC47/57 10' OFFSET ROTARY CUTTERS







Pull-Type

4", 5"



Making roadside cutting safe and efficient.

The RC4710 and RC5710 Rotary Cutters are single wing mowers that are ideal for roadside mowing. The left-hand wing is replaced with a weight box and allows the operator to travel next to the road's shoulder, remaining on more level ground. All the features you love from our 15-foot cutters are there too, in a 10-foot single wing model!

- · Left hand weight box
- Optional hitch configurations
- RC47: Optional deck rings RC57: Deck rings or DeckArmor™ Optional
- RC57: Replaceable 1/4" sideskirt with replaceable beveled skid shoe
- · Smooth top design
- · Heavy-duty blade carrier options



The 10' and 15' Cutters feature a Pre-Cut Chamber. This allows material to spring back up before being cut, giving a cleaner, more precise finish.



		RC4710	RC5710
	Horsepower	55-250 HP	60-250 HP
	Hitch	Pull-Type; Standard Swivel Clevis,	Pull-Type; Constant Level Swivel Clevis,
		LP Performance Self-Leveling, Pintle, Ball, Bar-Tite	LP Performance Self-Leveling, Pintle, Ball, Bar-Tite
Worki	ng Width (cm)	10' 6" (320)	10' 6" (320)
	Overall Width	1	1'7"
Min. Tra	ansport Width	7	7'3"
	Overall Length	16	6'3"
Machine Weight - Ib (kg)		5,160 (2341)	5,740 (2604)
	Cutting Height	1-1/2"	- 16" **
Cur	tting Capacity	4" Diameter	5" Diameter
Tong	ue Weight - Ib	1,948	2,200
De	eck Thickness	10 Gauge	7 Gauge Bottom, 10 Gauge Top
Max.	Turning Angle	80° v	vith CV
	Deck Height	1	12"
	Suspension	Spring Cushioned Center Axle	Various Options
	Deck Rings	Optional	Deck Rings or DeckArmor™ Optional
Side Pa	nel Thickness	1/4"	1/4" Replaceable
	Skid Shoes	Wing & Center, Replaceable, Beveled	AR400 Wing & Center, Replaceable, Beveled
	Chain Guards Front & Rear		Standard - Optional
	Blades	1/2" x	4" Uplift
	Blade Bolt	Keyed w/Hardened	Flatwasher & Lock Nut
Blade Tip	540 Center	16,300 fpm	16,400 fpm
Speed (Feet per	Wings	16,300 fpm	16,400 fpm
minute)	1000 Center	16,300 fpm	16,400 fpm
	Wings	16,000 fpm	16,000 fpm
ı	Blade Overlap		6"
	Dishpan	Forged Diamond Blade Bar, Optional 3/16" Round Dishpan	Forged Diamond Blade Bar; Optional 3/16" Round Bolt-on Dishpan Optional HD Blade Bar & Dishpans
Hydraulics	Wings	2-1/2" x 12"	3" x 8"
	Center	3" x 8"	3-1/2" x 8"
Ge	arbox Rating^	540 RPM or 1000 l	RPM: 250 HP Divider
		210 HP Center & Wing	225 HP Center & Wing
Gearbox	Output Shaft	2-3/8"	3"
Gearb	ox Input Shaft	1-3/4" 20 Spline	1-3/8" or 1-3/4" 20 Spline
lı	nput Driveline	Cat	. 6 CV
Connect	ing Drivelines	Cat. 4 or 5	5 Slip Clutch
	Tires	21" or 26" Laminated, 29" Used Aircraft, or 24" Foam-Filled	21" or 26" Laminated, 29" Used Aircraft 25.5" Foam-Filled
Transport Lights		Sta	ndard
Tra	insport Lights	Jiu	

RC36 SERIES OFFSET/FOLDING



Horsepower Hitch

Chain Guards

Front & Rear

Skid Shoes

Blade Bolt

540 Center

1000 Center

Blade Overlan

Wings

Wings

Dishpan

Blade Tip Speed

(Feet per minute) Blades





70-160 HP

Pull-Type;

Single - Standard

Double - Optional

Wings & Center, Replaceable

1/2" x 4" High Lift

Keyed with Hardened Flatwasher

& Lock Nut

16,000 fpm

16,000 fpm

16,500 fpm 16,500 fpm

6"

10 Gauge Round, Dish Shaped w/ 1" x 4-1/2" Blade Bar







Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite Working Width (cm) 14' (426) 20' (607) **Overall Width** 15' 20' 10" 9' 11" Min. Transport Width 8' 9" 17' 6" with Laminated Tires **Overall Length** Machine Weight - lb (kg) 5,990 (2717) 6,680 (3,030) 2" - 12" **Cutting Height Cutting Capacity** 2" Diameter Tongue Weight - lb 2 220 1,750 Max. Turning Angle 80° with CV **Deck Height** 13" **Deck Thickness** 10 Gauge Suspension Spring on Center Deck **Deck Rings** Optional Side Thickness 1/4"

Land Pride's RC3620 is the ideal Rotary Cutter for grassy fields, pastures, waterways, buffer strips, and set-aside acres and handles saplings up to 2" in diameter. With tip speeds of 16,000 to 16,500, gearboxes rated at 250 HP and 150 HP, 1-3/4" input shafts, 2" output shafts,

and optional CV drivelines, this unit will make quick and efficient work of the largest jobs.

Holds up to Tough Conditions.

Also available as a 14' offset model: RC3614.



10 Gauge stump jumper is backed with a 1" x 4-1/2" thick blade mounting bar to protect the gearbox seal and output shaft.

> Rephasing lift cylinders allow cutter to be leveled using hydraulic cylinders versus mechanical turnbuckles.



Land Pride



Hydraulics	Wings	3" x 12" Cylinder
	Center	2-3/4" x 8" RH Wing-3" x 8", LH Wing-3-1/4" x 8"
Gearbox Rating [^]		540 RPM or 1000 RPM: 250 HP Divider, 150 HP Center & Wings
Gearbox Output Shaft		2"
Gearbox Input Shaft		1-3/4" 20 Spline
Input Driveline		Cat. 6 CV
Connec	ting Drivelines	Cat. 4 Slip Clutch
	Tires C3614: 5 or 6 C3620: 6 or 8	21" Laminated, 29" Used Aircraft, or 27" Foam-Filled
Transport Lights		Standard
	Colors	



RC46 SERIES OFFSET/FOLDING

ROTARY CUTTERS







70-250 HP 3"

	HITCH
Pı	ıll-Tyne



		DUTY
Horsepower	70-250 HP	
Hitch	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite	
Working Width (cm)	Working Width (cm) 13'6" (439) 20' (607	
Overall Width	14' 9-1/2"	20' 10"
Min. Transport Width	9' 2-3/4"	9' 11"
Overall Length	17' 8-1/2"	17' 6" with Laminated Tires
Machine Weight - Ib (kg)	6,125 (2,778)	6,540 (2,966)
Cutting Height *	2" - 12"	
Cutting Capacity	3" Diameter	
Tongue Weight - Ib	2,220	2,160
Max. Turning Angle	80° with CV	
Deck Height	13"	
Deck Thickness	10 Gauge	
Suspension	Spring Cushioned Center Axle	
Deck Rings	Optional	
Side Thickness	1/4"	
Chain Guards Front & Rear	Single - Standard Double - Optional	
Skid Shoes	Wings and Replaceable	
Blades	1/2" x 4" l	High Lift
	Working Width (cm) Overall Width Min. Transport Width Overall Length Machine Weight - Ib (kg) Cutting Height * Cutting Capacity Tongue Weight - Ib Max. Turning Angle Deck Height Deck Thickness Suspension Deck Rings Side Thickness Chain Guards Front & Rear Skid Shoes	Hitch Pull-Type; Stat LP Performance Pintle, Ball Working Width (cm) Overall Width 14' 9-1/2" Min. Transport Width Overall Length 17' 8-1/2" Machine Weight - Ib (kg) Cutting Height * Cutting Capacity Tongue Weight - Ib Deck Height Deck Thickness Suspension Deck Rings Side Thickness Chain Guards Front & Rear Skid Shoes Poverformance Pull-Type; Stat LP Performance Pall Cay 13' 6" (439) 6.125" (2,778) 6.125 (2,778) 2" - 2" - 3" Diat 2,220 80° wi 0 Ge Suspension Optic Side Thickness Spring Cushione Deck Rings Optic Side Thickness United Single - S Double - I Skid Shoes Wings and Replaceable

At home in wide open spaces.

Right of ways, roadsides, pastures, open areas, and row crop fields are all candidates for the RC4620. It handles brush up to 3" in diameter, features a 7-year gearbox warranty, and has blade tip speeds up to

18,000 fpm. Rephasing axles allow for shorter axles which in turn leads to less weight on the tractor drawbar. The 46 Series features a diamond blade bar with an optional

bolt-on stump jumper. Decks feature 14" side skirts and smooth-top, 10 gauge decks.



- Replaceable and Reversible Wing and Center Deck Skid Shoes
- Single or Double Chain Guarding
- Hydraulic Rephasing Cylinders on Axle
- Shorter Axle for Lower Drawbar Weight
- Available Land Pride Performance Hitch
- Optional Fully-Welded Deck Rings

Diamond blade bar protects the gearbox seal and gearbox output shaft in tough conditions. Optional bolt-on stump jumper provides extra protection against stumps and other protrusions.



Blades		1/2" x 4" High Lift
Blade Bolt		Keyed with Hardened Flatwasher & Lock Nut
Blade Tip Speed (Feet per minute)	540 Center	17,000 fpm
	Wings	17,000 fpm
	1000 Center	18,000 fpm
	Wings	18,000 fpm
Blade Overlap		6"
•	Blade Bar	1" Thick, Standard
Dishpan		1" Plate Diamond Blade Bar; Optional 3/16" Round Dishpan
Hydraulics	Wings	3" x 12"
	Center	Rephasing Cylinders
	Gearbox	540 RPM or 1000 RPM: 250 HP Splitter, 210 HP Center & Wing(s)
Gearbox Output Shaft		2-3/8"
Gearbox Input Shaft		1-3/4" 20 Spline
Input Driveline		Cat. 6 CV
Connecting Drivelines		Cat. 5 Slip Clutch
Tires 6 or 8		21" Laminated, 29" Used Aircraft, or 27" Foam-Filled
Transport Lights		Standard
Colors		
*Maximum cut height is dependent on tire options selected.		



RC5014 14' FOLDING **ROTARY CUTTERS**



Horsepower

Working Width (cm)

Overall Width

Hitch









90-250 HP

Pull-Type;

Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite 13' 6"

14' 7"



Our largest offset cutter.

The RC5014 – Land Pride's largest offset folding rotary cutter - makes quick work of roadsides 14-feet at a time. The offset allows the operator to travel next to the roadway in the same direction of travel as the traffic, increasing safety for the operator.

The cutter features a heavy-duty Cat 6 driveline, heavy-duty gearboxes, and a high blade tip speed

for a clean, uniform cut in most highway mowing operations.



10-1/2" Deck height handles heavy cutting, which reduces balling-up of cut material under the deck.



Skid shoes are reversible and replaceable - each side of the center section, the wing, and the weight box.



1" Solid hinge rods and greasable cast wing hinges provide years of dependable service.



Choice of used aircraft tires, with or without foam, or laminated tires.

		** *
Min. Transport Width		8' 9"
Overall Length		19' 3"
Machine Weight - Ib (kg)		7,282 (3,303)
Cutting Height *		2" - 14"
Cı	ıtting Capacity	3" Diameter
Tongue Weight - Ib		2,300
Max.	Turning Angle	80° with CV
	eck Thickness	10 Gauge Top & Bottom
Deck Height		10-1/2"
	Suspension	Spring Cushioned Axle
Deck Rings		Optional
:	Side Thickness	1/4"
Chain Guards Front & Rear		Single - Standard Double - Optional
Skid Shoes		1 on Wing and Weight Box, 2 on Center Section, Replaceable
Blades		1/2" x 4" High Lift
Blade Bolt		Keyed with Hardened Flatwasher & Lock Nut
	540 Center	17,377 fpm
Blade Tip Speed	Wings	17,329 fpm
(Feet per minute)	1000 Center	18,165 fpm
	Wings	18,317 fpm
ride	Blade Overlap	6"
	Dishpan	1" Plate Diamond Blade Bar; Optional 3/16" Round Dishpan
Hydraulics	Wings	3-1/2" x 12"
	Center	4" x 8"
Ge	earbox Rating^	540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wing
Gearbo	x Output Shaft	2-3/8"
Gearbox Input Shaft		1-3/4" 20 Spline
Input Driveline		Cat. 6 CV
Connecting Drivelines		Cat. 5 Slip Clutch
Tires - 5 or 6		21" Laminated, 29" Used Aircraft, 27" Foam-Filled
Transport Lights		Standard
Tr	ansport Lights	Standard
Tr	ansport Lights Colors	Statudiu

RC5020-2 20' FOLDING ROTARY CUTTERS







Pull-Type



Be More Productive, 20' at	a	Time.
----------------------------	---	-------

Roadsides, pastures, set-aside acres and crop residue are perfect jobs for this 20' cutter. Wing decks float independently, and follow the contour of the land leaving an even cut. The 20' cutting width, 2" to 14" cutting height and ability to cut weeds and brush up to 3" in diameter make the RC5020 well suited for varied applications. Various safety guard choices make these an excellent choice for state and municipal mowing applications.

An optional baffle and shredder kit with adjustable spacing is available for crop shredding.

Outer wing wheels can be single or dual. Duals are ideal

when mowing in areas where one wing needs to flex uphill. The outer wheel rides up the embankment and keeps the deck from gouging. Wheel spindles are bolt-in to allow easy change out.



The optional LP Performance Hitch is self-leveling and swivels up and down, and rotates side to side for uneven terrain.



The diamond blade carrier handles most cutting conditions and leaves a cleaner cut.



The dishpan option assists the blade carrier in passing over obstructions that could damage the blade carrier.

		RC5020-2 HEAVY DUTY
Horsepower		90-250 HP
Hitch		Pull-Type;
		Standard Clevis, Swivel, Ball,
		Pintle, or Bar-Tite Hitch
Worki	ng Width (cm)	20' (607)
	Overall Width	20' 9-1/2"
Min. Tra	ansport Width	8' 9"
C	Overall Length	19' 3"
Machine V	Veight - Ib (kg)	6,528 (2,961)
Cı	utting Height *	2" - 14"
Cu	tting Capacity	3" Diameter
Tong	ue Weight - Ib	2,300
	Turning Angle	80° with CV
	eck Thickness	10 Gauge
	Deck Height	10-1/2"
	Suspension	Spring Cushioned Center Axle
	Deck Rings	Optional
	ide Thickness	1/4"
-	Chain Guards	Single - Standard
Chain Guards Front & Rear		Double - Optional
Skid Shoes		Wings and Center, Reversible, Replaceable, Beveled
	Blades	1/2" x 4" High Lift
Blade Bolt		Keyed with Hardened Flatwasher & Lock Nut
	540 Center	17,377 fpm
Blade Tip Speed	Wings	17,329 fpm
(Feet per	1000 Center	18,165 fpm
minute)	Wings	18,317 fpm
	Blade Overlap	6"
	Dishpan	1" Plate Diamond Blade Bar; Optional 3/16" Round Dishpan
	Baffle Kit	Optional - Rear
Hydraulics	Wings	3-1/2" x 12"
	Center	4" x 8"
Gearbox Rating [^]		540 RPM or 1000 RPM: 250 HP Divider, 225 HP Center & Wings
Gearbox Output Shaft		2-3/8"
Gearbox Input Shaft		1-3/4" 20 Spline
Input Driveline		Cat. 6 CV
Connecting Drivelines		Cat. 5 Slip Clutch
Tires 6 or 8		21" Laminated,
Tires 6 or 8		29" Used Aircraft, or 27" Foam-Filled
Tra	ansport Lights	Standard
	Colors	
*Maximum cut	height is denon	dent on tire ontions selected

^{*}Maximum cut height is dependent on tire options selected.

RCP26 SERIES PARALLEL ARM **ROTARY CUTTERS**











Optional gauge wheel deck allows the cutter to float over undulations without having to constantly monitor terrain conditions.

Hydraulic driven Parallel Arm Rotary Cutter.

Designed to "reach out" and cut along roadsides, over guard rails, down ditchbanks, and next to ponds, Land Pride's RCP26 has features that make our Parallel Arm Rotary Cutters unique.

First of all, it has a constant attitude! When the two cylinders that operate the two arm sections are activated, the attitude of the deck does not change; thanks to the parallel arm design. Lift the cutter head up, in or out to negotiate an obstacle, and your cutter deck position does not change; set the cutter head down at the same attitude as it was prior to the obstacle. This makes your work efficient!

The hydraulic breakaway feature of the RCP is also not found on your standard parallel arm cutter. The cutter deck is restored to its original position with the help of a hydraulic cylinder. The cutter deck can also swing rearward enabling you to mow into a tight corner, again putting it back to its original setting with the hydraulic cylinder.

Top Quality Features on the RCP26 and RCP30







Hydraulic breakaway feature pivots arm backward to avoid obstacles and protect cutter arm. Hydraulically pivots back into place.





In-line filter cleans hydraulic fluid before it re-enters reservoir.





RCP30 SERIES PARALLEL ARM ROTARY CUTTERS







Cat. 2 & 3



3 Foot longer reach than the RCP26 Series.

Great for those roadsides that want a manicured look further down the ditch, or being able to stay a little further away from the soggy banks of the pond.



Flow control valve compensates for various hydraulic systems.



Shut-off valve permits maintenance without oil loss.



The built in weight rack can be ordered to fit with various suitcase weight styles.



Grease zerks at all pivot points.



Optional Self-contained hydraulics.



Electric cylinder controls provide instant response for adjustments on the go.

	RCP3060		
Horsepower	95 HP Min.		
Hitch	Cat. 2 & 3		
Working Width (cm)	58" (147)		
Min. Transport Width	10'1"		
Min Tractor Weight - lb (kg)	12,000 (5,443)		
Tractor Hydraulics Req'd	Max 4, Min 1		
Hydraulic Pump Input	540 RPM or 1000 RPM		
Hydraulic Oil Capacity	35 Gallons		
Hydraulic Oil Flow	15 GPM		
Hydraulic System	Tractor Provided or Self Contained		
Overload Protection	Relief Valve		
Oil Cleansing	Return Line Filter, Replaceable		
Oil Check	Dipstick		
Min. Cutting Height	2"		
Cutting Capacity	2" Diameter		
Horizontal Cutting Reach (from center tractor)	18'10" Maximum		
Vertical Cutting Reach	13'5" Maximum		
Below Ground Level Reach	11' Maximum		
Operating Tilt Arc	180°		
Deck Thickness	Front and Rear Chain Guards		
Safety Guards	10 Gauge		
Blades	2 Each 1/2" x 4"		
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut		
Blade Tip Speed	15,000 fpm		
Blade Rotation	Clockwise		
Dishpan	3/16" x 21" Round, Dish Shaped		
Driveline	Cat. 3, 13/8" 21 Spline		
Storage	2 Parking Stands		
Unit Protection	Tension Bolt and Hydraulic Breakaway Cylinder		
Options	Operator Shield Suitcase Weight Bracket (Required) Gauge Wheels		
Transport Lights	Standard		
Color			
Additional tractor weight (dual tractor wheel			

Additional tractor weight (dual tractor wheel, calcium, etc.) may be needed.



DB2660 DITCH BANK ROTARY CUTTER





Horsepower

Working Width (cm)

Hitch



ry Hit

75 HP; Min. Tractor Weight

7,000 lbs.

Cat. 2 Std., Cat. 2 & 3 QH Clevis Type Lower Hitch

58" (147)

HITCH

Cat. 2 & 3



Quickly reach inclines.

Land Pride's DB2660 Ditch Bank Rotary Cutter enhances our growing line of Rotary Cutters. This new hydraulic-driven cutter boasts a number of features that will make mowing ditch banks, pond dams, or other hard to reach inclines fast, easy, and efficient.

Built for either 540 or 1000 RPM tractors, the DB2660 features a 58" cutting width, 2" cutting diameter, and 32" cutting reach. The $\frac{1}{2}$ " by 4" blades rotate clockwise at 15,000 fpm,

directing debris away from the tractor. Minimum cutting height is dictated by the tractor's 3-pt height.




Large 35 gallon oil reservoir maintains optimum fluid temperatures and also serves as a counterweight.



Built-in auxiliary weight rack is located on the left side close to the machine for ballast.



Optional side gauge wheels allow deck to float, eliminating frequent deck positioning.

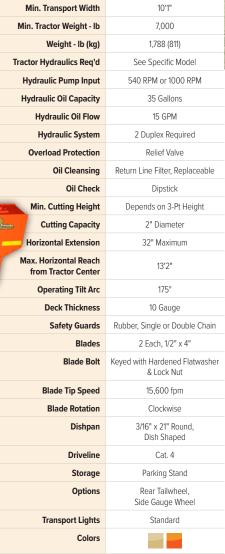



RTR05 SERIES ROTARY TILLERS









Versatility to fit every need.

Our 05 Series Reverse Tine Rotary Tillers are perfect for popular subcompact tractors. If you are tilling your yard for reseeding or getting the garden ready for spring planting, turn your ground over efficiently with the best small tiller available!

- Cast iron bearing mounts
- Front rubber flap to keep material in
- Lower hitch clevises for easier hook up to tractor



The chain cover is stamped for strength. The formed rear deflector keeps material in and leaves a level finish and is adjustable allowing for various finish results.





Control depth with seven adjustments to the skid shoes.



Four "C" shaped heat-treated tines per flange require less horsepower to move through the ground.



1-3/4" Solid steel rotor shaft provides strength.

~~	RTR0542	RTR0550	
Horsepower	Up to 26 HP		
Hitch	Ca	t. 1	
Width-endplate to endplate (cm)	42" (107)	50" (127)	
Overall width	46-1/2" (118)	54-1/2" (139)	
Weight - Ib (kg)	268 (122)	298 (135)	
Number of Flanges	6	7	
No. of Blades per Flange	4 C-Shape		
Blade Spacing	6-1/2"	6-3/4"	
Max. Tilling Depth ^	6-1/2"		
Skid Shoe Settings	4		
Rotor Swing Diameter	13"		
Rotor Shaft Speed	230 rpm at 5	40 rpm PTO	
PTO Driveline	Category 2 Off-Center Shear Bolt or Slip Clutch		
Gearbox	26 HP, 540 rpm, Cast Iron Housing, Drain Plug		
Drive Chain	#80 High Tensile in Oil Bath		
Sprockets	Hardened Teeth, Splined Center		
Colors			



RGR12/RGA12 SERIES

ROTARY TILLERS







Get in gear!

Land Pride also offers a popular line of 3-Point Rotary Tillers with two gear drive models; the RGA12 forward rotation and RGR12 reverse rotation. These American-made gear-drive tillers feature a Cat. 1 hitch, plate steel A-frame,

and 540 RPM gearbox. Both models include

a 17" diameter rotor, 6 "C" shaped tines per flange,

and a 7" tilling depth.

· · ·

6 C-Shaped tines per flange make for a better seedbed in less time than 4 tines.



West of the second

The rotor is powered by a spur-gear drive in an oil bath with a heavy stamped drive cover.

	RGA1242 RGR1242	RGA1250 RGR1250	RGA1258 RGR1258	RGA1266 RGR1266	RGA1274 RGR1274	RGA1282 RGR1282
Horsepower	er 18-60 HP		23-60) HP	30-60 HP	35-60 HP
Hitch			Cat	1		
Width-Endplate to Endplate (cm)	42" (107)	50" (127)	58" (147)	66" (168)	74" (188)	82" (208)
Overall Width RGA RGR	47-1/8" 47-1/2"	55-1/8" 55-1/2"	63-1/8" 63-1/2"	71-1/8" 71-1/2"	79-1/8" 79-1/2"	87-1/8" 87-1/2"
Weight - Ib (kg) RGA RGR	458 (208) 462 (210)	493 (224) 497 (225)	526 (239) 530 (240)	562 (255) 567 (257)	596 (270) 601 (273)	647 (293) 653 (296)
Number of Flanges	5	6	7	8	9	10
No. of Blades per Flange	6 "(" Shanod Blados Por Flando					
Blade Spacing	7-7/8"					
Max. Tilling Depth^	7"					
Skid Shoe Settings			Adjus	table		
Rotor Swing Diameter			17	"		
Rotor Shaft Speed			211 rpm at 54	40 rpm PTO		
PTO Driveline	Category 4 Slip Clutch					
Gearbox	60 HP, 540 rpm, Cast Iron Housing, Drain Plug					
Drive End Construction	Spur Gears Enclosed in Oil Bath with Oil Level Plug or Sight Glass and Oil Fill/Breather Plug					
Sprockets	Hardened Teeth, Splined Center					
Colors	-					



RTA12/RTR12 SERIES

ROTARY TILLERS









The most popular Rotary Tiller for compact tractors!

Land Pride's RTA12 Series forward rotation and RTR12 Series reverse rotation Rotary Tillers are a great seedbed preparation tool for either general gardening or lawn/landscape seeding. With uses in many residential applications, the 12 Series Rotary Tillers offer an economical yet durable tilling solution. These units feature a 3 year gearbox warranty, 10 year chain and sprocket warranty, and 6-1/2" tilling depth.

- Offset capabilities
- Forward or Reverse models available
- Lower clevis hitches for easier hook-up

Steel plate upper hitch





	RTA1242	RTA1250	RTA1258	RTA1266	RTA1274	RTA1282
	RTR1242	RTR1250	RTR1258	RTR1266	RTR1274	RTR1282
Horsepower	15-40	O HP	20-5	0 HP	25-60 HP	30-60 HP
Hitch			Cat	t. 1		
Width-Endplate to Endplate (cm)	42" (107)	50" (127)	58" (147)	66" (168)	74" (188)	82" (208)
Overall Width RTA RTR	47-3/8" 48-1/4"	55-3/8" 56-1/4"	63-3/8" 64-1/4"	71-3/8" 72-1/4"	79-3/8" 80-1/4"	87-1/8" 87-1/4"
Weight - Ib (kg) RTA RTR	391 (177) 404 (183)	421 (191) 435 (197)	448 (203) 463 (210)	476 (216) 493 (224)	503 (228) 521 (236)	552 (250) 581 (264)
Number of Flanges	5	6	7	8	9	10
No. of Blades per Flange						
Blade Spacing	7-7/8"					
Max. Tilling Depth^			6-1/	/2"		
Skid Shoe Settings			7	,		
Rotor Swing Diameter			15	;"		
Rotor Shaft Speed			211 rpm at 54	40 rpm PTO		
PTO Driveline	Category 3 Slip Clutch					
Gearbox	60 HP, 540 rpm, Cast Iron Housing, Drain Plug					
Drive Chain #80 High Tensile in Oil Bath						
Sprockets	Hardened Teeth, Splined Center					
Colors						



^Quick-Hitch may require a longer driveline, which is available through Land Pride Parts.



RTA15/RTR15 SERIES

ROTARY TILLERS









Sized right for hobby farms and nurseries.

The 15 Series Land Pride Rotary Tiller is sized just right for compact tractors that are used on hobby farms and in nurseries in every corner of the country. The RTA15 operates in forward rotation while the RTR15 is reverse rotation. The sideshift feature on this series enables you to shift the tiller to the right to cover a tire track or get closer to obstacles, while allowing the driveline to remain straight.



Solid steel rotor shaft provides strength.



Sideshift gearbox slides with tiller. Sideshift capabilities allow right tire track to be covered.



Adjustable skid shoes control depth with various settings.

	RTA1558 RTR1558	RTA1566 RTR1566	RTA1574 RTR1574
Horsepower	17-50 HP		
Hitch	Cat. 1		
Width-Endplate to Endplate (cm)	58" (147)	66" (168)	74" (188)
Overall Width	64-1/4"	72-1/4"	80-1/4"
Weight - Ib (kg)	444 (201)	476 (216)	508 (230)
Number of Flanges	7	8	9
No. of Blades per Flange	4 C-Shape		
Blade Spacing	7-7/8"		
Max. Tilling Depth [^]	6-1/2"		
Skid Shoe Settings	7		
Rotor Swing Diameter		15"	
Rotor Shaft Speed	211	rpm at 540 rpm F	PTO
PTO Driveline	Category 3, Off-Center Shear Bolt or Slip Clutch		
Gearbox	50 HP, 540 rpm, Cast Iron Housing, Drain Plug		
Drive Chain	#80 High Tensile in Oil Bath		
Sprockets	Hardened Teeth, Splined Center		
Colors			

See page 45 for reverse-till diagram.







RTA20/RTR20 SERIES

ROTARY TILLERS







We have traditional forward rotation...

Available in two popular widths, the Land Pride RTA20 Series Rotary Tiller effortlessly turns up hard-packed ground, leaving a perfect seedbed for gardens or grass. Suited for up to 50 HP tractors, this model fits a wide range of tractor owners, from landscapers or city and park maintenance operations to golf course superintendents.

And the most popular reverse rotation...

The Land Pride RTR20 Series Rotary Tillers are just right for home gardening, landscape work, food plot maintenance, and light commercial use. Available in 64" and 72" widths, RTR20 Series Rotary Tillers feature a reverse tilling action for tough ground conditions. The reverse action of the rotor brings material up and over the top, burying heavier clods and small rocks, leaving the soil on top for a perfect seed bed.

Both models use standard Land Pride features like a strong stamped chain cover, adjustable rear deflector, heavy-duty driveline and parking stand – in the end the quality and dependability shine through.

		RTA2064	RTA2072	RTR2064	RTR2072	
	Horsepower	23-75 HP				
	Hitch		Cat	. 1		
	n-Endplate to indplate (cm)	64" (162)	72" (183)	64" (162)	72" (183)	
(Overall Width	70-13/16"	77-7/8"	70-13/16"	77-7/8"	
W	eight - lb (kg)	689 (313)	734 (333)	748 (339)	795 (361)	
Numb	er of Flanges	8	9	8	9	
No.	of Blades per Flange	6 C-Shape				
В	lade Spacing	7-1/2"				
Max. 1	illing Depth [^]	7"				
Skid S	hoe Settings	7				
	Offset	14"	18"	14"	18"	
Number of	Sifting Tines	N/A 43 48			48	
Rotor Sw	ing Diameter	17"				
Rotor	Shaft Speed	220 rpm at 540 rpm PTO				
F	PTO Driveline		Category 3, Heavy-Duty Shear Bolt or Slip Clutch			
	Gearbox	50 HP, 540 rpm, Cast Iron Housing, Drain Plug			ain Plug	
	Drive Chain	#80 High Tensile in Oil Bath				
	Sprockets	Hardened Teeth, Splined Center				
Colors						

See page 43 for reverse-till diagram.





RTA25/35 SERIES **ROTARY TILLERS**










A contractor's dream.

Ideal for landscapers, gardeners, and contractors, the Land Pride RTA25 Series forward rotation Rotary Tillers prepare seedbeds for gardening or lawn planting. Rugged and dependable, the RTA25 features a heavy-duty driveline, a parking stand for easy hook-up, and optional down pressure springs apply pressure on the rear deflector, holding larger debris in the tines for better pulverization in tough leveling conditions.

With a 76" working width, and adjustable lower hitch clevises, taking out your tire track is usually achievable. This allows for less overlap needed, meaning less



RTA35 SERIES:

Ready to tackle the tough stuff.

The RTA35 Series is Land Pride's toughest tiller, built to withstand the rigors of commercial jobs. The 35 Series Tiller is designed to go all day, day after day, in the most demanding jobs. With a 19" rotor swing diameter, this tiller can turn over a lot of dirt without much getting in its way. The RTA35 is ideal for landscaping, nurseries, and commercial gardening applications.

	RTA2562	RTA2570	RTA3576
Horsepower	25-75 HP		35-95 HP
Hitch	Cat	1	Cat. 1 & 2
Width-Endplate to Endplate (cm)	64" (162)	70" (178)	76" (193)
Overall Width	68"	76"	81-1/2"
Weight - Ib (kg)	649 (294)	663 (301)	856 (388)
Number of Flanges	8	9	8
No. of Blades per Flange	6 C-S	hape	6 C-Shape
Blade Spacing	7-7/	/8"	9"
Max. Tilling Depth	7"		7"
Skid Shoe Settings	6		6
Rotor Swing Diameter	17"		19"
Rotor Shaft Speed	220 rpm at 540 rpm PTO		204 rpm at 540 rpm PTO
PTO Driveline	Category 3 Heavy-Duty Shear Bolt or Slip Clutch		Category 4 Slip Clutch
Gearbox	55 HP, 540 rpm, Cast Iron Housing, Drain Plug		75 HP 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#100 High Tensile in Oil Bath		#100 High Tensile in Oil Bath
Sprockets	Hardened Teeth, Splined Center		Hardened Teeth, Splined Center
Colors			

See page 45 for reverse-till diagram.







RTR25 SERIES ROTARY TILLERS










Save time with reverse rotation.


A Reverse Tine Tiller turns up ground cover, chops it a time or two, and buries it under a cascade of large clods, which are buried under small clods. Large clods fall first, and they just get smaller as they pile on top of each other. What's left on top is a perfect seedbed to foster your wild imagination!

• Spring-loaded rear deflector levels the freshly tilled seedbed

• Hinged front flap with rubber insert helps prevent damage to deck from debris coming over the top of the tines

Skid shoe on drive side has additional chain case protection





The reverse rotation of the tiller tines forces the tiller in the ground, preventing "walking" on hard ground. Once it's in, it stays put!



		RTR2570
	Horsepower	25-75 HP
	Hitch	Cat. 1
Width-Endplate to Endplate (cm)		70" (178)
	Overall Width	76" (193)
Tables Tables	Weight - Ib (kg)	868 (394)
	Number of Flanges	9
No	o. of Blades Per Flange	6 C-Shape
12/7	Blade Spacing	7-7/8"
	Max. Tilling Depth ^	7"
Skid Shoe Settings		7
	Offset	Up to 5"
N	lumber of Sifting Tines	46
	Rotor Swing Diameter	17"
	Rotor Shaft Speed	220 rpm at 540 rpm PTO
	PTO Driveline	Category 3 Slip Clutch
	Gearbox	55 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain		#100 High Tensile in Oil Bath
	Sprockets	Hardened Teeth, Splined Center
	Colors	



3P500/3P500V COMPACT DRILLS





Small drills, big features.

The 3P500 Min-Till Drill is designed to get into places big drills simply can't; like wooded areas, orchards, and vineyards. These excel when seeding into fully prepared and minimum tillage plots. Add the optional small seeds box and plant two different seeds at the same time. The 3P500V offers a low profile box, ideal for orchards and vineyards.



		3P500, 3P500V
	Horsepower	35 HP Min.
	Hitch	3-Pt, Cat. 1 & 2
	Primary Design	Min-Till
	Row Spacings	6", 7-1/2"
	Number of Openers	9 - 6" Spacing, 7 - 7-1/2" Spacing
	Weight - Ibs (kg)	1,200 (544), 1,100 (499)
	Working Width	5'
	Width	5'
	Transport Length	Varies by Tractor
	Transport Clearance	Varies by Tractor
	Transport Height	Varies by Tractor
	Opener Series	00 Series
	Opener Travel	6.5"
	Opener Depth Range	0 - 3-1/2"
Opener Down Pressure Main Box Capacity Small Seed Box		90-180 lbs
		10 bu. (8.5 bu. Vineyard)
		1.2 bu.
	Color	

The ground drive system automatically disengages when lifted, simplifying the unit and enhancing its reliability.



The 3P500V offers a low profile box, ideal for orchards and vineyards.



00 SERIES

Choice of 2x13 Single Press Wheels or 3x13 Center Rib Press Wheels.





3P600 COMPACT DRILL







Gets into places big drills simply can't.

The 3P600 Min-Till Drill features a highly visible seed level indicator, extremely accurate fluted seed cups, V-bottom inserts on the inside of the seedbox that allow all the seed to be metered, and water tight lids that stay open for filling. This model is ideal for wooded areas.

The rugged 00 Series openers provide accurate and consistent seed placement. Openers have 7" of stagger between the opening and press wheels to allow residue to easily flow through the unit. Inside the opener our full length seed tube gently guides the seed all the way to the bottom of the trench and a seed flap makes sure the seed stays in the trench. The trailing press wheels maintain proper opener depth, close the seed trench, and firm the seed into the soil. T-handles quickly adjust the press wheels and allow for small incremental changes in planting depth.



00 SERIES

Choice of 2x13 Single Press Wheels or 3x13 Center Rib Press Wheels.

3P600
40 HP min.
3-Pt., Cat. 1 & 2
Min-Till
6", 7-1/2"
11 - 6" Spacing, 9 - 7-1/2" Spacing
1,500 (680)
6'
6'
Varies by Tractor
Varies by Tractor
Varies by Tractor
00 Series
6.5"
0 - 3-1/2"
90-180
12 bu.
1.44 bu.

British Balling

3P606NT COMPACT DRILL







Mounted versatility.

3P606NT models are 3-Point mounted no-till drills, allowing you to get close to field edges and with our proven ground drive no remote hydraulics are needed. The rugged 6' seeder is ideal for limited space situations and maneuvering among trees and other obstacles. The lead coulters have 4" stagger to aid in residue flow and prepare a mini-seedbed for the 06 series openers to plant into.

All 3P606NT models come standard with a fluted feed box. Add a native grass box for seeding fluffy native grass mixes that include seeds like big and little bluestem and smooth brome. You can further increase your options by adding a small seeds box; a smaller version of our standard fluted feed box used for clover and alfalfa. Add both and seed three different types of seed and rates, all at the same time!



	Hitch	3-Pt, Cat. 2
	Primary Design	No-Till
280	Row Spacings	7-1/2"
_	Number of Openers	9
	Weight - Ibs (kg)	2,280 (1,034)
)°	Working Width	6'
Ji'	Width	6'
	Transport Length	Varies by Tractor
	Transport Clearance	Varies by Tractor
$\stackrel{\sim}{\sim}$	Transport Height	Varies by Tractor
	Opener Series	06 Series
	Opener Travel	6.5"
	Opener Depth Range	0 - 3-1/2"
	Opener Down Pressure - Ibs	90-180
	Coulter	5/8" Turbo or 5/16" Fluted
	Coulter Pre-Load - Ibs	450
	Main Box Capacity	12 bu.
	Small Seed Box	1.44 bu.
	Native Grass Box	6 bu.
	Color	

Horsepower

3P606NT

60 HP Min.



06 SERIES

5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance.

606NT COMPACT DRILL









End wheel efficiency.

The 6' Pull-type No-Till Drill (606NT) features an end wheel design that reduces side-loading on openers when operated on contours and curves, eliminating premature opener wear.

With the optional native grass and small seeds box this machine is quite capable in pasture renovations and food plot seeding. Other features like heavy duty coulters, calibration crank, central grease bank, lock-out hubs for transport, and optional weight brackets create a system designed for long-term dependability and productivity in a broad range of seeding applications.



06 SERIES

5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance.



Exclusive fluted wide seed cup delivers outstanding accuracy; delivering the rate you choose, evenly and gently.

4-Speed gearbox provides increased accuracy and flexibility of the metering system by giving the operator more choices for drive speed.



	606NT
Horsepower	40 HP Min.
Hitch	Pull-Type
Primary Design	End Wheel No-Till
Row Spacings	7-1/2"
Number of Openers	9
Tire Size	7.00-15LT
Weight - Ibs (kg)	2,700 (1,124)
Working Width	6'
Width	8'6"
Transport Length	11'5"
Transport Clearance	14"
Transport Height	5'1"
Opener Series	06 Series
Opener Travel	6-1/2"
Opener Depth Range	0 - 3-1/2"
Opener Down Pressure - Ibs	90-180
Coulter	5/8" Turbo or 5/16" Fluted
Coulter Pre-Load - Ibs	450
Main Box Capacity	12 bu.
Small Seed Box	1.44 bu.
Native Grass Box	6 bu.
Color	

COMPACT DRILL









THE WAR AND THE PARTY OF THE PA				
	800			
Horsepower	45 HP min.			
Hitch	Pull-Type			
Primary Design	End Wheel Min-Till			
Row Spacings	6", 7-1/2"			
Number of Openers	15 - 6" Spacing, 12 - 7-1/2" spacing			
Tire Size	700-15LT			
Weight - Ibs (kg)	2,379 (1,079)			
Working Width	7'6"			
Width	9'8-1/2"			
Transport Length	12'			
Transport Clearance	9"			
Transport Height	5'4"			
Opener Series	00 Series			
Opener Travel	6.5"			
Opener Depth Range	0 - 3-1/2"			
Opener Down Pressure - Ibs	90-180			
Main Box Capacity	16 bu.			
Small Seed Box	2 bu.			
Color				

Big performance in a small package.

This 8' Min-Till Drill (800) uses the field proven 00 Series opener to properly place seed. This rugged opener utilizes 13-1/2" 4mm thick disk blades, full length seed tube and an 18 position T-handle press wheel to precisely control seed depth. Changing the 5-position, centrally located opener down pressure adjustment is quick and easy, ensuring the correct down pressure regardless of the conditions.

Other features include a fluted feed metering system, 4-speed gearbox and adjustable gate opening to accurately set a wide variety of planting rates for crops from alfalfa to peas. A dry fertilizer and/or a small seeds attachment can be added to tailor the drill to your needs.



00 SERIES

Choice of 2x13 Single Press wheels or 3x13 Center Rib Press Wheels.



LED lights provide high visibility and safety during transport.



Digital acremeter provides LED readout of current acres on machine. Unique design conserves battery power.



Lock out hubs





4-Speed gearbox provides increased accuracy and flexibility of the metering system by giving the operator more choices for drive speed.



3P806NT COMPACT DRILL



80 HP Min.

Horsepower Hitch

Width

Opener Down Pressure - Ibs

Coulter Pre-Load - Ibs

Main Box Capacity

Small Seed Box

Native Grass Box

Fertilizer

Color

2nd Main Box

3P806NT 80 HP Min.

Semi-Mount

No-Till

7-1/2"

265/70B 16.5 4,350* (1,973)

8'

8'2"

12'1" w/Lift Assist

Varies by Tractor

7'8"

06 Series

6.5"

0-3.5"

90-180 5/8" Turbo or 5/16" Fluted

450

16 bu.

1.92 bu.

8 bu.

8 hu

8 bu.

Semi-Mount



3P806NT Model Shown With Optional Native Grass and Small Seeds Boxes

Narrow transport.

Our double disk configuration and full length seed tube ensures that the seed is placed consistently at the depth chosen. Additional seed tubes are used to place both native grass and small seeds, allowing three seeds to be planted at separate rates at the same time. Depth control is handled by the 18 position T-handle press wheel adjustment.

The main seed box is a fluted feed design. The seeding rate is set with the four speed transmission and the adjustable gate opening. The optional native grass box uses our proven "picker wheel" to meter the seed. Rates are adjusted by varying the speed of the drive. Lastly, the optional small seeds attachment is a smaller version of our fluted feed system, and seeding rates are set by changing the width of the fluted feed. agitator, and dual seed.



06 SERIES

5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance.



V-Bottom dividers allow seed to feed from seed box to feeder cup for complete emptying.







The ground drive system automatically disengages when lifted, simplifying the unit and enhancing its reliability.

*See dealer for complete warranty information.

3P1006NT COMPACT DRILL







10' Narrow semi-mounted.

At 10' seeding and 10' transport this machine is productive yet can easily get in pasture gates, over bridges, and transport down narrow roads.

2-Point mounting and dual hydraulic lift assist wheels in the rear give the drill excellent ground clearance as well. Non-swiveling coulters allow the 3P1006NT to stay on side hills without drifting. Competitive models use swiveling coulters that tend to run downhill. Two smaller pneumatic tires in front gauge depth for the coulters, as well as drive the metering systems on the drill.



06 SERIES

5/8" Turbo Blade for maximum penetration or 5/16" Fluted Blade for pasture renovation and low soil disturbance.

Start with the standard 2 bu. per ft. main seed box, then add either a 2nd seed box for dual seed, a dry fertilizer box, or a native grass box. Additionally you can add a small seeds box to the main box

or add it to the dual seed/fertilizer/native grass box choice.





	3P1006NT	
Horsepower	100 HP Min.	
Hitch	Semi-Mount	
Primary Design No-Till		
Row Spacings	7-1/2"	
Number of Openers	15	
Tire Size	265/70B 16.5	
Weight - lbs (kg)	5,460* (2,476)	
Working Width	10'	
Width	9'8"	
Transport Length	13'3" w/Lift Assist	
Transport Clearance	Varies by Tractor	
Transport Height	7'8"	
Opener Series	06 Series	
Opener Travel	6.5"	
Opener Depth Range 0-3.5" Opener Down Pressure - lbs 90-180		
		Coulter
Coulter Pre-Load - Ibs	450	
Main Box Capacity	20 bu.	
Small Seed Box	2.40 bu.	
Native Grass Box	10 bu.	
Fertilizer	10 bu.	
2nd Main Box	10 bu.	
Color		

706/1006NT COMPACT DRILL







End-wheel versatility.

Land Pride's 706NT and 1006NT End Wheel No-Till Drills are ideal for seeding in a wide variety of applications from pasture renovation to utility reclamation or food plots to food production. They are a great combination between the productivity of a large drill and the versatility of a compact one.

Both models feature large end wheels designed for unmatched ground gauging in rugged terrain. In addition, the in-line end wheels minimize side loading on contours and hills, dramatically extending the life of the no-till openers. Our 706NT comes standard with a 17-bushel main seed box, the 1006NT is 25-bushel. You can also add a small seeds box and either a native grass box or a fertilizer box. These drills also include a 6-position hitch that adjusts to your tractor's hitch height to keep the drill level in planting position. Furthermore, with its high clearance and end wheel design, the 706NT and 1006NT can go virtually anywhere your tractor can pull it, without gouging or bottoming out.



	706NT	1006NT	
Horsepower	55 HP Min.	75 HP Min.	
Hitch	Pull-Type, Pin	tle or Clevis	
Working Width	7'	10'	
Width	9' 10"	12' 7"	
Length	13' 10"	13' 10"	
Height	6' 7"	6' 7"	
Ground Clearance	13.5"	13.5"	
Weight lbs - (kg)	3,900 (1,769) 4,500 (2,0		
Seedbox Capacity - Main	17.5 bu.	25 bu.	
Small Seeds Box	1.7 bu. 2.4 bu.		
Native Grass Box	7 bu. 10 bu.		
Fertilizer Box	6.5 cu./ft.	9.2 cu./ft.	
Row Spacing	7.5" 7.5"		
Number of Openers	10 15		
Tires	9.00 x 24, 8-ply	9.00 x 24, 8-ply	
Opener Travel	6.5"	6.5"	
Opener Depth Range	0 - 3.5"	0 - 3.5"	
Opener Down Pressure	90 - 180 lbs	90 - 180 lbs	
Coulters	5/8" Turbo or 5/16" Fluted	5/8" Turbo or 5/16" Fluted	
Acre Meter	Digital, Optional		
Color			

NTS26 SERIES SEEDERS







Sod farms to food plots.

The NTS26 No-Till Seeder incorporates 40 years of experience in designing and manufacturing seeding equipment to deliver a durable, high-quality tool that will exceed your expectations. Whether employed to restore a pasture, reclaim a right-of-way, overseed a ball field,

or plant a new yard, you know that Land Pride's NTS26 will deliver the results you've come to expect from a seeder leader.

Front rollers feature 5/8" x 2" spikes that break through thatch and crust to prep the soil for seeding.



Easily disengage drive sprockets with Land Pride's patented Lock-Out Clutch on all boxes.



Optional native grass box uses agitators to keep the seed flowing toward the picker wheel.



Mud scrapers on the rear packer roller keep soil from compacting on roller in damp conditions.

		A STATE OF THE STA			
			NTS2607	NTS2609	NTS2611
		Horsepower	3-Point: 70 HP Pull-Type: 60 HP	3-Point: 90 HP Pull-Type: 80 HP	3-Point: 110 HP Pull-Type: 100 HP
		Hitch 3-Point, Cat 1 & II or Pull-Type with Transport Wheels 3-Point, Cat II or F with Transport V			
		Working Width	7'	9'	11'
		Length	3-Point: 57", Pull-Type: 133"		
In fa.		Height		47"	
	M. S. L.	3-Point (kg)	1,878 lbs (852)	2,090 lbs (948)	2,650 (1202)
Weight	Pull-Type (kg)	2,425 lbs (1100)	2,728 lbs (1237)	3,320 lbs (1506)	
Seedbox Capacity - Main		Capacity - Main	7.5 bu.	8.8 bu.	11.3 bu.
Small Seeds Box		Small Seeds Box	1.7 bu.	2.0 bu.	2.6 bu.
Native Grass Box		lative Grass Box	8.5 bu.	9.8 bu.	12.7 bu.
		Output	Varies by	Seed, Broadcas	t
		Front Rollers	8-5/8" Diameter, 1-1/ Bal	'4" Spindles with Il Bearings	Greasable
	Fr	ont Roller Angle	Up to	18 Degrees	
	Fro	nt Roller Spikes	5/8" x 2", Heat-Tre	eated Steel, Rep	laceable
	Re	ar Packer Roller	11-3/8" Diameter, C	ast and Notched Rings	l Gray Iron
		Chains	#40 Series Chain		
ı		lo. of Seed Cups nall Seed Box - each	12	14	18
		Acremeter	Digital, Optional		
	1	Transport Lights	S	Standard	
		Color			

APS15 SERIES

ALL-PURPOSE SEEDERS







The seeder that does it all.

The APS15 is at home in freshly prepared soil or overseeding existing turf. The front spike rollers break up the soil crust or penetrate the thatch to disturb the right amount of soil. The seed is dropped, protected from the wind by a shield, allowing it to drop to the ground where it is gently pressed into the soil by the notched or spiked rear roller. The initial seed-to-soil contact is essential to achieving a high germination rate.

The All-Purpose Seeder is ground driven with no driveline and related drivetrain components to maintain. By adjusting the front two rollers, you can control how aggressive you want to be in the area you are seeding or overseeding.

The many uses for the APS:

- Bare dirt seeding
- Turf overseeding
- · Wildlife Conservation Seeding



Choose between a rear spiked roller or a 12" cast packer wheel roller.

	A PIANI	The Aller		
WILLIAM TO THE STATE OF THE STA	Hir Mir	(1)		
ATT ATT	APS1548	APS1560	APS1572	APS1586
Horsepower		25-1	30 HP	
Hitch		Cat. 1		Cat. 1 & 2
Working Width (cm)	50" (127)	60" (152)	72" (183)	86" (218)
Overall Width	60"	72"	81"	98"
Overall Length	49"	51"	52"	55-1/2"
Overall Height		42	-1/2"	
Weight - Ib (kg)	547 (248)	702 (318)	836 (379)	1,070 (485
Seedbox Capacity	4	5	6	7.2 Bushe
Output Range	Va	ries By Seed Var	iety; Consult Ma	nual
Front Roller - 2	8" Diame	eter, 1" Spindles v	v/Greaseable Ba	II Bearings
Rear Roller	8" Diai	meter w/Studs o	12" Cast Packer	Wheels
Chain		#40 with Sprii	ng Loaded Idler	
Seed Cups	7	8	10	12
Front Roller Angling		Up t	o 20°	
Roller Studs	1/2"	to 2" Heat Treat	ed Steel, Replac	eable
Transport Lights		Star	ndard	
Color				

*60" and 86" models with rear cast packer wheels



Optional small

seeds box.

OS15 SERIES OVERSEEDERS










The OS15 Overseeders offer precise placement and seed-to-soil contact, making them ideal for over-seeding existing stands of grass or establishing new turf. The three way seed-to-soil contact system provides great germination and emergence with the solid advantages of a full-width seeding pattern. Fluted seed cups precisely meter the desired amount of seed in a broadcast pattern, delivering outstanding metering accuracy. Choose from gauge-wheel drive or plant close to sidewalks and obstacles with the rear-roller drive.



(A) Straight, aggressive 3/16" thick knives prepare the soil by pulling up thatch, while (B) 10 gauge curved knives provide a minimum of

surface

disturbance.




The optional small seeds box allows two seeds to be metered at one time into the same seed tube for even distribution.



The solid, cast-iron packer wheels finish the job by pressing and firmly packing the seed into the soil, eliminating most air pockets.



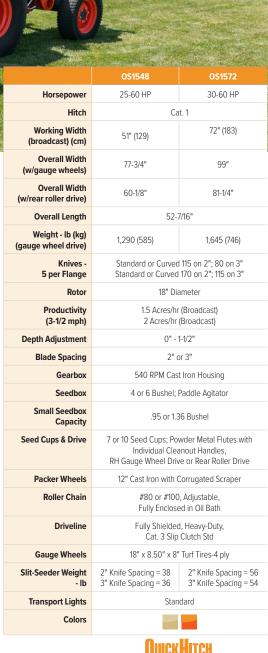





PS15 SERIES PRIMARY SEEDERS







Precise metering and seed-to-soil contact.

The PS1572 Primary Seeder is perfect for the hometown landscaper to do lawns, community parks and areas between the curb and sidewalk. They also perform better than larger models in areas where light moguls, undulations, and depressions exist.

"Precision seeding" is accomplished using proven fluted metering cups (shown here). Each flute grabs just the right amount of seed for even distribution. Millions of cups are in use for a variety of crops around the world.

Various seeding rates can be obtained by turning the dual sprocket over. The easy drive system assures a consistent flow of seed. The rear roller is spring loaded to keep in constant contact with the ground, promoting healthy "seed-to-soil" contact.

(Cover removed for photo.)




	PS15/2	
Horsepower	25-60 HP	
Hitch	Cat. 1	
Working Width (cm)	70-1/2" (179)	
Overall Width	79-1/8"	
Overall Length	29-3/4"	
Overall Height	39"	
Weight - Ib (3-Pt) (kg)	1,165 (528)	
Seedbox Construction	16 Gauge Front & Rear, 10 Gauge Endplates	
Seedbox Capacity	6 Bushel	
Output Range	Varies By Seed Variety; Consult Manual	
Front Roller	29 Rings - 12" Diameter 1-1/2" Spindles w/Sealed Ball Bearings	
Rear Roller	30 Rings - 9-1/2" Diameter	
Roller Spindles	1-1/2" Front, 1" Rear w/Greaseable Bearings	
Chain	#40 with Spring Loaded Idler	
Seed Cups	10 Each	
Track Removers	2 Each	
Transport Lights	Standard	
Colors		

PTS/PFS SERIES

FERTILIZER SPREADERS





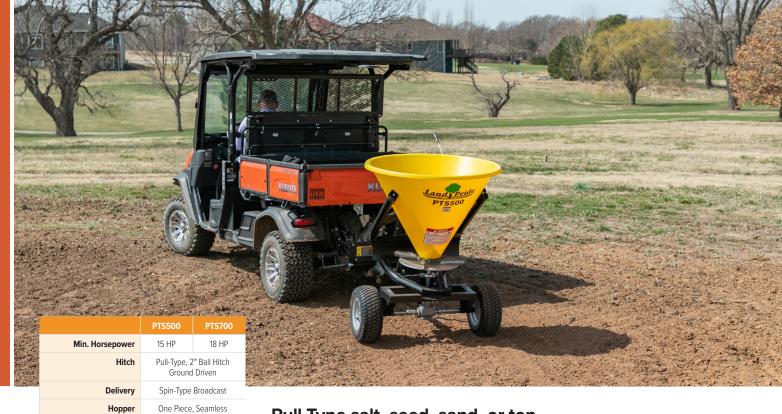

Pull-Type salt, seed, sand, or top dressing spreader.

- Easily disengage spinner for transport
- Adjustment link for various hitch heights
- Two hopper sizes
- Hopper cover available to protect material
- 2" Ball hitch
- Ground driven

Pendulum Spreaders offer a more consistent spread.

Various Spouts Available

Polyethylene

Heavy-Duty Tubular

Stainless Steel

Plated

54" Average

39-46 ft.

Three

41"

16 x 6.5-8

7-15 Acres per Hour (depending on slide opening)

176 (80)

563 (255)

165 (75)

350 (158)

Dry Weight (kg)

Vanes and Spinner

Adjustment Levers

Max. Spreading Width

Hopper Capacity - Ib (kg)

Loading Height

Pattern Settings

Overall Width

Wheel Size
Acres Covered

Frame

- Broadcast (Standard)
- Banding (Wide)
- Banding (Narrow)
- · Narrow Broadcast
- PTO Driven



	PFS4000	PFS5060	PFS8010	
Hitch	Cat. 1	Cat. 1 & 2	Cat. 2	
Capacity	925 lbs	1,150 - *1,390 lbs	2,040 - *3,000 lbs	
Delivery	Pendulum-Type			
Hopper	One Piece, Seamless Cone Shape Fiberglass Polyethylen			
Frame	Heavy-Duty Tubular			
Driveline	Shielded			
Spreading Width	20 - 46 Ft.			
Gearbox	1-3/8" Shaft			
Adjustment Levers	Plated			
Discharge Opening	Manual, Optional Hydraulic N/A			
Additional Agitation	Optional N/A			
O-1:!				

^{*}Optional top extensions needed for this capacity











Spreading made fast and easy with weatherproof hopper.

Featuring an all-steel frame, frontal splash plate and three available hopper sizes, Land Pride Broadcast Spreaders fit most landscape, nursery, hobby farm, sod farm, and municipality uses.

- Spin-type broadcast for even spreading
- One piece seamless Polyethylene hopper
- Adjustable delivery patterns
- · Vinyl cover option to keep the elements out
- PTO Driven



A built in tow hook handles up to 1200 pounds; just right for hauling extra sacks of fertilizer or seed.



Our agitator is standard equipment and is useful when spreading powder type materials that tend to bridge.

Compare to others!

Stainless Steel Parts

- Spinner Plate
- Spinner Vanes
- Hopper Doors, Hardware and Adjustment Handle

	FSP500	FSP700	FSP1000	
Min. Horsepower	15 HP	18 HP	20 HP	
Hitch	Cat. 1			
Capacity (kg)	350 lbs. (158.7) 5.85 cu.ft.	563 lbs. (255) 9.38 cu.ft.	673 lbs. (305) 11.22 cu.ft.	
Overall Dimensions	37.2" x 40.4"	44" x 46"	46.8" x 46.8"	
Loading Height	3'	3' 4"	3' 9"	
Weight - Empty - Ib (kg)	119 (54) 128 (58) 139 (63)		139 (63)	
Net Spreadable Granular Width	23' - 54'			
Transmission Ratio	1:1			
Range of Spreading Possibility - Ib/acres	44 - 890			

SBR SERIES SEED BED ROLLER









Improve germination rates.

Land Pride's SBR72 Seed Bed Rollers will break up smaller clumps and dirt clods, while pressing applied seed into firm contact with the soil profile for greatly improved germination rates. They are available with a 3-Point hitch or Pull-Type, and are ideal in landscaping, sports field maintenance, pasture maintenance, professional turf care, general seeding, and overseeding applications.



Available in Cat. 13-Point hitch or as a Pull-Type unit to match your needs.

Indexing dual capability hitch on Pull-Type model ensures easy fit and function for 2" ball or pin and clevis type attachment.





Notched and ribbed patterned cast iron roller provides optimal seedbed finish and long durable product life.

The property of the property o		SBR72 w/Optional Pull Hitch - flip over for transport.
		SBR72
	Horsenower	18-52 HP

	SBR72		
Horsepower	18-52 HP		
Hitch	Cat. 1 & Cat. 1 QH		
Working Width (cm)	69" (175)		
Weight - Ib (kg)	442 (200) 3-Pt		
Optional Pull Hitch	Easily Pivots for Ball or Clevis Hook-up		
Roller Diameter	11-3/8"		
Roller Material	Notched Gray Iron		
Scraper	Profiled Roller Scraper		
Tires	Transport Tires on Pull-Type		
Stand	Hitch Support Stand		
Options	Easily Converts from Pull-Type to 3-Point		
Colors			





DRG SERIES DRAG HARROW









Smooth out sports fields.

Land Pride Drag Harrows are highly versatile in their design and performance. A harrow mounted on the drag bar with tines facing down and forward will deliver aggressive soil stirring action and deep penetration. Turn the harrow 180° with tines facing down and to the rear and you'll get less penetration with lighter cultivating action. Flip the harrow over with tines facing up and you get almost no cultivating action. Perfect for dragging a sports field or smoothing out recently cultivated ground.

	DRG04	DRG06	DRG08
Min. HP	8 HP	12 HP	16 HP
Hitch	2 Log Chains with Pull Ring		
Working Width (cm)	4' (122)	6' (183)	8' (244)
Weight - lb (kg)	89 (40)	138 (63)	185 (84)
Tine Diameter	1/2"		
Construction	High Carbon Steel Tine Construction		
Color			




FPS SERIES

FOOD PLOT SEEDERS







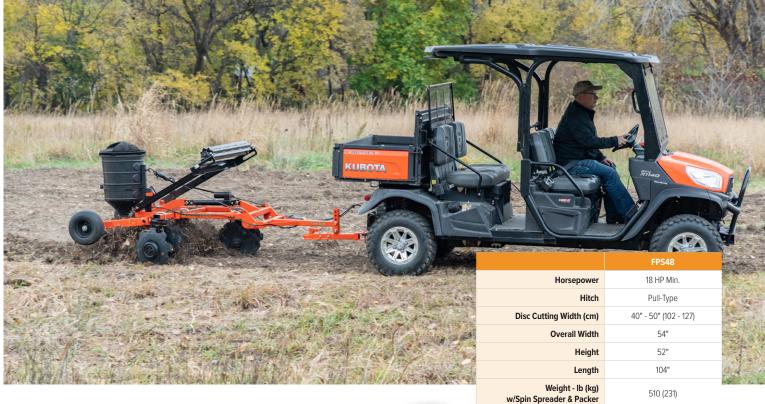


Affordability for food plots.

The FPS48 is an ideal tool for planting food plots by the avid hunter or the ultimate animal lover and is sized right to work behind a subcompact or compact tractor, your ATV, UTV, or even your hunting truck. The spreader can also be mounted seperately to your UTV or Disc Harrow.



The rear roller gently presses seed into the ground for good seed-to-soil contact. It pivots for transport and storage without taking the spreader off the unit (shown below).









AG15 SERIES ARENA GRADERS







Simple, efficient.

Land Pride's AG15 Series Arena Grader is an entry level arena grader for hobbyists and enthusiasts. The Cat 1 hitch is quick hitch compatible and ties into a 2" x 2" square tube frame. The end tubes are 2" x 3". The S-tines feature replaceable tips. Behind the two rows of S-tines is a five-position leveling bar to smooth the soil. The job is finished with either a pipe or mesh roller to break clods and fluff the soil. The working depth is 4" and is set by a simple ratchet handle, a Land Pride exclusive feature.



Finish your job with either a pipe roller which will provide uniform surface, while the mesh roller provides uniformity as well as a smoother finish.

Working depth is 4" and is set by a simple ratchet handle, a Land Pride exclusive.





	AG1560	AG1572	AG1584			
Horsepower	18-45 HP	18-55 HP	18-65 HP			
Hitch	Cat. 1, Quick Hitch Compatible					
Working Width	60"	72"	84"			
Working Depth	4"					
Depth Control	Ratchet Jack					
Frame	2x2 Square Tubing Frame					
S-Tines		Replaceable Tips				
Rolling Basket	Adjustable, Mesh or Pipe					
Leveling Bar	Adjustable					
Color						

RB05/15/16 SERIES REAR BLADES







Ideal for light duty maintenance and landscaping.

Land Pride's economical RB05, RB15, and RB16 Series Rear Blades are an excellent and economical choice for leveling, grading, finishing, and backfilling. They are the perfect companion for your subcompact or compact tractor.

The multitude of forward and reverse working angles, moldboard offset capability, as well as tilt on the RB16, allows the operator to work right up next to retaining walls, abutments, and raised curbing. They are excellent for snow removal in the pulling or push blade mode. A retractable parking stand is included to accommodate easier blade removal, storage and remount capabilities.

		RB0548	RB0560	RB1560	RB1572	RB1584	RB1660	RB1672	RB1684	
	Horsepower	17-2	5 HP		17-40 HP			20-40 HP		
	Hitch	Ca	t. 1		Cat. 1			Cat. 1		
	Working Width (cm)	48" (122)	60" (152)	60" (152)	72" (183)	84" (213)	60" (152)	72" (183)	84" (213)	
	Approx. Weight - lb (kg)	128 (58)	143 (65)	248 (112)	269 (122)	289 (131)	283 (128)	297 (134)	319 (145)	
I	Angling	5 Fwd Up to 30° R			Fwd Up to 45 Rev Up to 30			Fwd Up to 45 Rev Up to 30		
	Tilt	N	/A		N/A		5 Positions; Up to 15° Lef		eft or Right	
ı	Offset	10" Left	or Right	12	" Left or Righ	t	1	2" Left or Righ	nt	
	Moldboard Height	13-1	1/2"		14"			14"		
	Moldboard Thickness	1/4	4"		1/4"			1/4"		
	Cutting Edge	3/8" x 3", Re Heat T		,	eversible & Re Heat Treated	placeable,	1/2" x 6", R	eversible & Re Heat Treated	eplaceable;	
	Options	N	/A		Skid Shoes		Skid Sho	oes, Hydraulic	Angling	
	Colors									





RB0560

RB26/37 SERIES REAR BLADES







Everyday blades; dirt, snow, farm, landscape – About as versatile as it gets!

The Land Pride RB26 and RB37 Series Rear Blades offer 3-way positioning (blade angle, blade tilt, and blade offset) and are an excellent choice for leveling, grading, or backfilling. They excel in snow removal in either the pulling or push blade mode. Their offset and tilt capability make them an excellent choice for construction and maintenace of drainage ditches, waterways, soil contours, and for maintaining silage pit operations. Optional hydraulic angling kits are available for both models.



A parking stand allows the front of the hitch to be off the ground when storing, and offers easier hook-up.



Optional side plates hold material in to be moved, while optional skid shoes keep the cutting edge off the ground to protect from hitting low obstructions.

		(**/	I	I	I		
	RB2672	RB2684	RB2696	RB3772	RB3784	RB3796	
Horsepower		25-60 HP		35-80 HP			
Hitch	Cat. 1			Cat.	Cat. 1 & 2 Combination		
Working Width (cm)	72" (183)	84" (213)	96" (244)	72" (183)	84" (213)	96" (244)	
Weight - lb (kg)	369 (167)	396 (180)	425 (193)	595 (270)	630 (286)	665 (302)	
Angling		Fwd. Up to 49 Rev. Up to 69		7 Fwd. Up to 45°; 3 Rev. Up to 30°			
Tilt	5 Positions; Up to 15° Left or Right, 30° Total			7 Positions; Up to 22.5° Left or Right, 45° Total			
Offset		12"			26" Left or Right		
Moldboard Height		17-1/2"			17"		
Moldboard Thickness	5/16"				5/16"		
Kingpin		3-1/2" Tube		2-	-1/2" Solid Sh	aft	
Cutting Edge		1/2" x 6", Reversible & Replaceable; Heat Treated					
Options		Side Plates, Skid Shoes, Hydraulic Angling			Plates, Skid S ydraulic Angli		
Colors							



RBT35 SERIES REAR BLADES









The perfect all-around blade.

Our RBT35 Series Blade is just right for use in landscape, construction, farming or snow removal. Looked upon as the perfect all-around blade, the RBT35 Series is offered with optional hydraulic function for tilt, offset and angle.



EX EXCELLENT	
0	

The 3" kingpin on the moldboard is stout enough to hold up to tough tasks.

	RBT3584	RBT3596		
Horsepower		5-80 HP to 65 HP		
Hitch	Cat.	1 & 2		
Working Width (cm)	84" (213)	96" (244)		
Weight - lb (kg)	709 (322)	745 (338)		
Maximum G.V.W lb (kg)	9,500	(4,318)		
Blade Angle		s (Manual): & Rev (Hydraulic)		
Tilt	Up t	o 20°		
Tilt Cylinder	2" x 6"	x 1-1/4"		
Swing Offset	ving Offset Up to 30" Left and Right			
Offset Cylinder	3-1/2" x 1	4" x 1-1/4"		
Moldboard Height	1	7"		
Moldboard Thickness		/16" Tapered ent Channel		
Cutting Edge		ole & Replaceable; Freated		
Options	Gauge Double Sel	i, End Plates Wheel, ector Valve, on Valve		
Colors				





RBT40 SERIES REAR BLADES







From barns to pastures to fields . . . our larger blades can do it all!

Land Pride's RBT40 Series 3-Way Hydraulic Rear Blades are built tough from the ground up for applications ranging from landscaping, construction, snow removal, and feedlot cleaning.

for ditching, road grading, and all-around farm use. By using optional hydraulics at all three


positions, changes to angle, tilt, and offset can be made while on the go. Optional skid shoes and side plates

are available for more precise results.





Optional cushion valve protects cylinders and blade components during extreme impacts.



Horsepower	2WD: 65-100 HP 4WD: Up to 75 HP					
Hitch	Cat. 1	& 2				
Working Width (cm)	96" (244)	108" (274)				
Weight - lb (kg)	848 (385)	898 (407)				
Maximum G.V.W lb (kg)	9,500 (4	,318)				
Blade Angle	15 Positions (Manual): Forward and Reverse, Up to 45°					
Angle Cylinder	3-1/2" x 16" x 1-1/4"					
Tilt	Up to 15°					
Tilt Cylinder	3" x 6" x 1-1/4"					
Swing Offset	Up to 30" Left and Right					
Offset Cylinder	3-1/2" x 16"	x 1-1/4"				
Moldboard Height	17"					
Moldboard Thickness	5/16" with 1/4 Reinforcemer					
Cutting Edge	1/2" x 6", Reversible Heat Tre					
Options	Skid Shoes, Side Plates, Hydraulic Cushion Valve Double Selector Valve					
Colors						



RBT45/55 SERIES REAR BLADES









Built tough...where it really counts.

Land Pride's RBT45 and RBT55 Series 3-Way Hydraulic Rear Blades are ideal for landscaping, construction, snow removal, feedlot cleaning, and all-around farm use. Make changes on the go with hydraulics at all three positions and use your time more efficiently. Available options include single or double hydraulic gauge wheels, side plates for holding dirt in, and skid shoes for blade protection.





Pivot weldment features a 1" thick plate steel turntable, 3/4" thick tilt pivot bushing and a 4" solid kingpin.



Optional cushion valve on the RBT45 protects cylinders and blade components during extreme impacts.



Optional single or dual gauge wheels add accuracy and simplify grading operations.

	RBT4596	RBT45108	RBT55120
Horsepower	70-12	5 HP	90-180 HP
Hitch	Cat. 2	2 & 3	Cat. 2 & 3
Working Width (cm)	96" (244)	108" (274)	120" (304)
Weight - Ib (kg)	1,130 (513)	1,166 (529)	1,753 (795)
Maximum G.V.W. - lb (kg)	9,500 ((4309)	15,000 (6818)
Blade Angle	Fwd & Rev	Up to 45°	Fwd & Rev Up to 45°
Angle Cylinder	4" x	16"	4-1/2" x 16" x 2"
Tilt	Up to 15°		Up to 30°
Tilt Cylinder	3" x 6" x 1-1/4"		3" x 8" x 1-1/4"
Swing Offset	Up to 35" Left and Right		33"
Offset Cylinder	4" x	16"	4-1/2" x 16" x 2"
Moldboard Height	19	"	19"
Moldboard Thickness	5/16" w Boxed Rein		5/16" with 1/4" Boxed Reinforcement
Cutting Edge	1/2" x 6", Re Replaceable;		1/2" x 6", Reversible & Replaceable; Heat Treated
Options	Skid Shoes, Single or D Wheel, Cusl Double Sele	ual Gauge hion Valve,	Skid Shoes, End Plates, Hardened Wear Plates, Hydraulic Single Gauge Wheel, Hydraulic Dual Gauge Wheel, Double Selector Valve
Colors			



RBT60 SERIES REAR BLADES








1/2" Thick moldboard... this blade can tackle most jobs thrown its way!

Rear blades don't come any tougher than Land Pride's RBT60 Series 3-Way Rear Blades. They are built tough to handle leveling, finish grading, and backfilling applications involving roadwork, construction, landscaping, nurseries, drainage ditches, feedlot cleaning, farm use, and snow removal.

The 19" tall rolled moldboard can be hydraulically angled left or right up to 45°, the ends can be tilted up or down by as much as 15°, and the whole blade can be offset to the left or right. The blade can also be rotated 180° for blading in reverse with the same angling, tilting, and offset capabilities. Available accessories include gauge wheels for good depth control, end plates for holding material, and skid shoes for blade protection.

- Hydraulic adjustments with cylinders & hoses
- · Main frame: fully welded formed box
- · Retractable parking stand
- Options: gauge wheels, end panels, skid shoes





	RBT6010	RBT6012			
Horsepower	2 WD: 225 HP 4 WD: 200 HP	2 WD: 175 HP 4 WD: 160 HP			
Hitch	Cat. 2	& 3			
Working Width (cm)	10' (304)	12' (366)			
Weight - Ib (kg)	2,442 (1108)	2,582 (1172)			
Blade Angles	Up to 45°, Fwd. & Re	ev. 5" x 18" Cylinder			
Offset	Up to 55" Left & Right 5" x 18" Cylinder				
Tilt	Up to 15°, 3-1/2" x 8" Cylinder				
Moldboard Height	19	"			
Moldboard Thickness	1/2" Thick w/Reinfo	rcement Channel			
Kingpin	4-1/2" Solid	Steel Bar			
Cutting Edge	1/2" x 6", Reversible & Replaceable; Heat Treated				
Colors					

^{*} Quick Hitch cannot be used with optional gauge wheels.



LR05/16 SERIES LANDSCAPE RAKES







The essential tool for landscapers.

As one of America's largest suppliers of Landscape Rakes, Land Pride offers light-duty through construction-grade models. Designed for raking rocks, dirt, sand, and landscaping and construction debris, our rakes are the landscaper's perfect tool to clean and prepare a site for seeding as well as general maintenance around farms, parks and beaches.





	LR0548	LR0560	LR1660	LR1672	LR1684	LR1696		
Horsepower	15-25	5 HP		20-40 HP				
Hitch	Cat	t. 1		Cat. 1				
Working Width (cm)	48" (122)	60" (152)	60" (152)	72" (183)	84" (213)	96" (244)		
Angle/Position	5 Forward	Up to 30°		7 Forward	Up to 45°			
No. of Teeth	26	34	30	36	42	48		
Teeth Spacing	1-3/4" C	Centers	2" Centers					
Teeth Material	High Carbon	Spring Steel	High Carbon Spring Steel					
Tooth Size	1/4" x	3/4"		5/16" x 1"				
Rake Height	12			16-1	/2"			
Weight - lb (kg)	98 (44)	113 (51)	241 (109)	270 (122)	291 (132)	316 (143)		
Options	N/	Ά	Dual Gauge Wheels 13" x 4" x 6" or 13" x 6.5" x 6" Flip-Down Grader Blade (Must be Used in conjunction with Dual Gauge Whee					
Colors								





LR26/37 SERIES LANDSCAPE RAKES







A versatile tool for landscapers, cities, parks, and other recreational areas.

The LR26 and LR37 Series Landscape Rakes are ideal for spreading rock, moving debris, preparing seed beds, and reshaping soil and/or aggregate profile. Available accessories include single or dual gauge wheels, hydraulic angling kit, and flip down grader blades.

SF25 SERIES SCARIFIERS

Land Pride's SF25 Series Scarifiers perform severe ripping, loosening, renovation, and reshaping of the soil profile. The versatile action of the SF25, paired with a Rake or a Blade, makes them perfectly suited for use

SF25, paired with a Rake or a Blade, makes them perfectly suited for use by landscapers, contractors, and rental yards.

The Land Pride Scarifier can work in unison with our 3-Point 16 and 26 Series Landscape Rakes and Rear Blades.

Horsepower	25-60) HP	30-80	HP	
Hitch	Cat. 1 84" (213) 96" (244) 7 Forward Up to 45° N/A N/A		Cat. 1	or 2	
Working Width (cm)	84" (213)	96" (244)	84" (213)	96" (244)	
Angle/Position	7 Forward	Up to 45°	5 Forward Up to 30°		
Offset	N/A	1411		ving, 24" Offset al or Hydraulic	
No. of Teeth	42	48	42	48	
Teeth Spacing	2" Centers		2" Centers		
Teeth Material	High Carbon Spring Steel		High Carbon Spring Steel		
Tooth Size	5/16"	5/16" x 1"		x 1"	
Rake Height	16-1/	2"	16-1/2"		
Weight - Ib (kg)	330 (150)	348 (158)	460 (209)	483 (219)	
Options	Dual Gauge Wheels 13" x 4" x 6" or 13" x 6.5" x 6", Flip-Down Grader Blade, Hydraulic Angle Cylinder		Dual Gaug 13" x 4" z 13" x 6.5 Flip-Down Gr	x 6" or 5" x 6",	
Colors					

	SF2566	SF2577				
Horsepower	25-50 HP					
Hitch	Ca	t. 1				
Working Width (cm)	60" (152)	72" (183)				
Width (cm)	66" (168)	77" (196)				
Weight - Ib (kg)	208 (94)	235 (107)				
No. of Shanks	6	7				
Shank Type	3/4" x 2-1/2" Hea Steel Dimpl					
Colors						



BB05/12 SERIES BOX SCRAPERS







Productivity in a small package.

The Land Pride BB05 Series Fixed Bar Box Scrapers are designed for Category 0, 1, and 1 limited 3-Point hitch for mounting to subcompact tractors. The Land Pride BB12 Series Box Scrapers are designed for Category 1, 3-Point hitch or Quick-Hitch System mounting to tractors up to 30 HP range. Both Box Scraper models are ideal for ripping, leveling, finish grading, and backfilling applications at small feedlots, outdoor arenas, building sites, and maintenance operations for small landowners. The manually adjustable ripping shanks and the fore and aft cutting blades make these units especially effective and productive for small projects.



	BB0548	BB0554	BB1248	BB1254	BB1260	BB1266	BB1272	
Horsepower	17-25	5 HP		17-30 HP				
Hitch	Cat. 0, 1 an	d 1 Limited			Cat. 1			
Working Width (cm)	48" (122)	54" (137)	48" (122)	54" (137)	60" (152)	66" (168)	72" (183)	
Height of Moldboard	13-5/16",	, Rolled	15-3/8", Formed					
Side Panel Material	3/16"		3/16"					
Depth of Bucket	18-1	/2"	23-1/8"					
Weight - lb (kg)	277 (126)	298 (135)	316 (143)	325 (147)	346 (157)	370 (168)	404 (183)	
Number of Shanks	4	4	4	4	4	5	6	
A-Frame Material	3/8" x 2-1/2	2" Flat Bar			1/2" x 3"			
Cutting Edges	Two 3/8" x 3" Heat Treate Reversible &	ed Blades,	Two 3/8" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable				S,	
Colors								





BB15/25 SERIES BOX SCRAPERS









Level, finish, grade, and backfill all with one tool.

Land Pride's BB15 and BB25 Series Fixed Bar Box Scrapers are ideal for ripping, leveling, finish grading, and backfilling applications at feedlots, outdoor arenas, and construction sites, or for maintenance operations on lanes or roadways. The BB25 offers five different working widths to choose from. The roll-formed moldboard keeps materials flowing putting less drag on the Box Scraper, resulting in lower HP requirements and faster working conditions. The rear-mounted blade allows for backfilling trenches or along foundations.

Side panel gussets reinforce the structural integrity during extreme conditions. (BB25 only)

	BB1560	BB1566	BB1572	BB2560	BB2566	BB2572	BB2584	BB2596
Horsepower		17-40 HP				25-55 HP		
Hitch		Cat. 1				Cat. 1		
Working Width (cm)	60" (152)	66" (168)	72" (183)	60" (152)	66" (167)	72" (182)	84" (213)	96" (244)
Height of Moldboard		17"				17"		
Side Panel Material		5/16"				3/8"		
Depth of Bucket	22"			22"				
Overall Depth		31-1/2"		31-1/2"				
Overall Height		35"		35"				
Weight - lb (kg)	428 (194)	450 (204)	504 (229)	471 (214)	500 (227)	549 (249)	593 (269)	658 (298)
Number of Shanks	4	5	6	5	5	7	7	8
A-Frame Material		1/2" x 3" Flat Ba	ır			1/2" Plate		
Cutting Edges	Two 1/2" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable			Two		gh Carbon Hearsible & Replac		des,
Colors								



BB35 SERIES BOX SCRAPERS







Ideal for construction sites and commercial operations.

The beefy 3/8" x 4" x 4" main-frame tube and 3/8" end panels makes our 35 Series Fixed Bar Box Scraper ideal for construction sites and commercial operations or for use by counties and municipalities.

Two welded channel braces extend from front to rear of the box plus welded gussets between the side panels and 23" formed moldboard provide exceptional strength under heavy loads. The durable BB35 is comfortable dragging or back-filling.



Heat-treated dimpled on tips are easy to replace, and are heat-treated for toughness.



Heat-treated cutting blades are reversible so both edges can be used before replacing.



	BB3578	BB3584	BB3596			
Horsepower	45-120 HP					
Hitch	Cat. 1 & 2					
Bucket Capacity - cu.ft. (cu. meter)	30 (.85)	37 (1.1)				
Working Width (cm)	78" (198)	96" (244)				
Height of Moldboard	23"					
Side Panel Material	3/8"					
Depth of Bucket	35"					
Overall Depth		44"				
Overall Height		35-1/2"				
Weight - Ib (kg)	825 (374)					
Number of Shanks	7	7 7				
A-Frame Material	1/2"					
Cutting Edges	Two 1/2" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable					
Colors						





MR15/HR25 SERIES

BOX SCRAPERS







Choose from manual or hydraulic retractable box scrapers.

The easy and convenient retractability of the scarifier shanks on the MR1572 and HR2572 makes them highly productive and ideal for ripping, leveling, finish grading, and backfilling applications at commercial feedlots, outdoor arenas, building sites, and maintenance operations on farm and ranch lanes, gravel, roadways, or constructions sites.

The roll-formed moldboard keeps materials flowing which puts less drag on the Box Scraper, resulting in lower HP requirements and faster working conditions. Shanks on the MR15 are kept in the up or down position with a positive locking system, keeping the scarifier bar from bouncing in transport and tight during field use.

- · Self locking down position
- Hydraulic raising and lowering of shanks on HR25
- 3 Position shank with replaceable tip
- · Rigid backfill blade



The hydraulic retractable ripping shanks on the HR25, in combination with the 21" double-thick moldboard design, make these units highly productive for construction projects.

	MR1572	HR2572			
Horsepower	2WD: 20-50 HP 4WD: 25-40 HP	30-60 HP			
Hitch	Cat. 1				
Working Width (cm)	72" (183)				
Height of Moldboard	18-1/2"	20-1/2"			
Depth of Side Panels	27-1/2"	34"			
Side Plate Material	3/	8"			
Weight - Ib (kg)	615 (279)	851 (386)			
Number of Shanks	7				
Cutting Edges	Two 1/2" x 6" High Carbon Heat Treated Blades, Reversible & Replaceable				
Colors					



HR/HRL35 SERIES BOX SCRAPERS









Hydraulic retractable box scrapers, available in highback or lowback.

The HR/HRL35 Series Retractable Box Scrapers meet dirt moving and soil contouring needs of landscapers, contractors, nurseries, sod growers, farmers, ranchers, and municipalities. Soil contouring productivity is dramatically increased with utilization of the hydraulically controlled retractable scarifier.

The front blade mounted on the moldboard is ideal for soil redistribution and soil leveling. A second blade mounted on the hinged rear gate further enhances the ability of the Box Scraper to redistribute and level soil. Both the front and rear blades are replaceable and can be flipped over to extend blade life. The HR/HRL35 is used for finishing and fine grading when the hinged rear gate is bolted in place. Unbolt the rear gate and the unit's front blade will penetrate deeper into the soil. Place the tractor in reverse and the rear blade can be used to backfill.



The hinged rear backfill blade can be in float or fixed position for packed down grade, level grade, or rough grade.



Save time by raising and lowering the shanks hydraulically.



Knurled bushings in the hitch points eliminates premature wear from working forwards and backwards.

	HRL3578 Lowback	HR3584 Highback			
Horsepower	40-120 HP				
Hitch	Cat. 1 & 2				
Working Width (cm)	78" (198) 84" (2				
Height of Moldboard	17"	23"			
Depth of Side Panels	30"				
Side Plate Material	1/2"				
Overall Depth	43-1/2"				
Capacity Cu. Ft.	26	31			
Weight - lb (kg)	981 (445)	1,119 (508)			
Number of Shanks	8				
Cutting Edges	Two 1/2" x 6" High Carbon Hea Treated Blades, Reversible & Replaceable				
Colors					





GS05/15/25 SERIES GRADING SCRAPERS







A low cost alternative for road grading applications.

Land Pride Grading Scrapers simply and quickly move dirt or aggregate from high spots to low spots making them extra user-friendly and a low cost alternative for road grading applications. Simply setting a properly adjusted Grading Scraper on the ground and driving forward enables the operator to grade off high spots and fill in ruts at low spots on unimproved roads and lanes with little or no manipulation of the tractor's 3-Point


hitch controls. Unlike a rear blade, they require no adjustment of blade angling or offset positions.



3-Position scarifier shanks allow the scraper to be adjusted to desired amount of calibration and guarding action. Hardened tips assure long service life.



Replaceable and reversible full length skid shoes make for easier operation and long unit life.



Reversible, heat-treated, highcarbon steel grading blades offer excellent wear resistance and long service life.

	GS0548	GS0560	GS1548	GS1560	GS1572	GS2572	GS2584	GS2596	
Horsepower	17-3	3 HP	20-50 HP	20-50 HP 25-50 HP		40-90 HP			
Hitch	Ca	t. 1		Cat. 1		Cat. 1 & 2			
Working Width (cm)	48" (122)	60" 152)	48" (122)	60" (152)	72" (184)	72" (183)	84" (213)	96" (244)	
Side Panel Thickness	-,	3/16" Thick with 1-1/2" Formed Edges		3/16" Thick with 2-3/4" Formed Edges		1/4" Thick with 2-3/4" Formed Edges			
Front Main Beam & Scarifier Support	Reinforced Tubing: 3"	" x 1/4" Heavy Wall x 2" x 3/16" all Tubing	4" x 4" x 5/16" Reinforced Heavy Wall Tubing; 2" x 2" x 3/16" Heavy Wall Tubing		4" x 4" x 5/16" Reinforced Heavy Wall Tubing; 3" x 3" x 3/16" Heavy Wall Tubing				
Skid Shoe Dimensions	.,	1/4" Thick x 1-1/2" Wide x 40" Long		3/8" Thick x 2-3/4" Wide x 44" Long			3/8" Thick x 2-3/4" Wide x 50-1/4" Long		
Scarifier Shank Construction	3 Po	sition	Heat [*]	Heat Treated 4-Position Shank		with Dimpled-on Hardened Tips			
Cutting Edges	3/8'	"x 6' Two 1/2" x 6" High Carbon Heat Treated Blades; Reversible & Replaceable			9				
Cutting Edge Adjustment	Fixed		Infinite Vertical Adjustment from I		evel Grade to	o 1-1/2" Below	Grade		
Weight - lb (kg)	310 (141)	350 (159)	437 (198)	511 (232)	594 (269)	728 (330)	796 (361)	864 (392)	
Colors									

Rear cutting blades available as an accessory.



BB45 SERIES DRAG SCRAPERS







Reshape country roads, waterways and terraces.

Land Pride BB45 Series Pull-Type Drag Scrapers are ideal for moving large quantities of material, leveling, and finish grading. Material can be transferred by dragging it to nearby locations and raising the scraper to deposit the load. Surfaces can be graded and leveled by scraping material from high areas and allowing accumulated material to flow under the grader blade into lower areas.

- 4" x 4" Square tubing main beam and tongue
- 5" Maximum cutting depth can load the bucket quickly
- Optional weight tray can be filled with 760 lbs. of concrete for additional weight when scraping and moving material
- Choose the tilt axle option for shaping slopes, terracing, or ditching. The tilt cylinder will raise one side of the drag scraper approximately 8" (7" on BB4596).



Vertical gussets for superior strength under side loads.

	The state of the s					
	BB4596	BB4510	BB4512			
Horsepower		70-130 HP				
Hitch		Pull-type				
Working Widths (cm)	96" (245)	10' (305)	12' (366)			
Clevis	Swivel B	all, Clevis or Swive	el Clevis			
Tongue		Removable				
Capacity	1-3/4 cu.yd	2-1/4 cu.yd	2-3/4 cu.yd			
Dump Clearance	21"					
End Plates		3/8"				
Moldboard		1/4"				
Cutting Edge		1/2" x 6"				
Axle		Fixed or Tilt				
Tilt Cylinder		3" x 8"				
Tilt Angle	3-1/2 Degrees, 3-1/2 Degrees, Approx. 8"					
Tires & Rim	15" Implement Recap; 5 Bolt, 4.5" Rim					
Transport Lights	Dual, Optional Standard					
Colors						

CA05/15 SERIES CORE AERATORS





Perfect for garden tractors, zero turn mowers, and utility vehicles.

When your turf begins to suffer the effects of compaction and wear, such as shallow root zones, thatch build-up, worn pathways, compacted soil, poor surface percolation, or water stands, a Land Pride CA Series Core Aerator will provide immediate seasonal relief.

- 1/2" Hardened steel spoons
- Penetration 3" to 4-1/2"
- Greaseable gangs






	CA0540	CA0548	CA0556	CA1548	CA1556	CA1564	CA1572	
Hitch		Pull-Type			Cat. 0, 1	1, 1 Ltd.		
Working Width (cm)	36" (91)	44" (112)	52" (132)	41" (104)	50" (127)	58" (147)	66" (168)	
Overall Width (cm) (w/Wheels)	50" (127)	58" (147)	66" (168)	48" (123)	56" (142)	64" (163)	72" (183)	
Overall Length	38-7/8" (48" w/wheels)			24-7/8"				
Spoon Material	1/2" Hardened Steel			1/2" Hardened Steel				
Spoon Spacing (Fwd Travel)	8-1/2"			6"				
Spoon Penetration	3"			3" - 4-1/2"				
Support Stand	N/A			3 Each				
Gang Assembly	Greaseable			Greaseable				
Transport Wheels	2 Optional			N/A				
Plug Size	1/2"			1/2"				
Colors								



CA25 SERIES CORE AERATOR



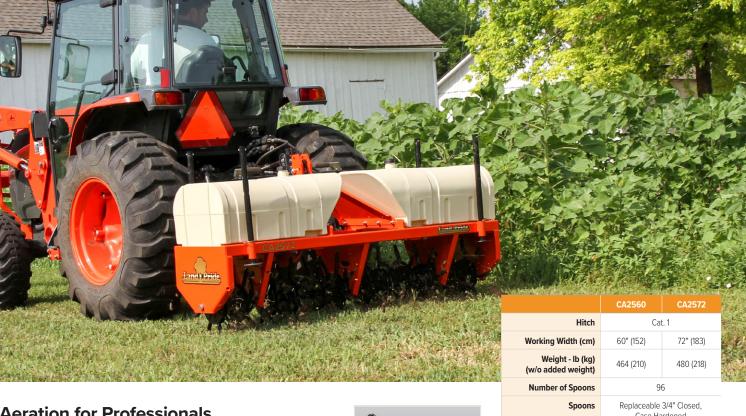

Aeration for Professionals

Fall aeration is simple and fast with a Land Pride CA25 Core Aerator. The 3/4" plugs open up the soil allowing oxygen and nutrients to the root zone for healthier turf grasses with stronger root systems. The plugs are deposited on top of the turf and help create an optimal environment for overseeding. Optional Water Tanks shown for additional weight to aid in spoon penetration.

	CR2572		
Hitch	Cat. 1		
Working Width (cm)	69" (175.3)		
Overall Width (cm)	80" (203)		
Weight - Ib (kg)	475 (215)		
Height	41"		
Number of Discs	12		
Disc Spacing	6-1/2"		
Flat, Notched Discs	Heat-Treated, Greaseable		
Cast Iron Hubs	4 Bolt		
Storage Stands	4, One in Each Corner		
Heavy Tubular Frame	2-1/2" x 2-1/2" x 3/16"		
Optional	Water Tanks for Additional Weight		
Water Tank Capacity	36 Gallons per Tank		
Full Water Tank Weight	600 lbs		
Colors			

Quick Hitch



The 3/4" spoon is beveled to easily penetrate the ground and create a nice clean hole.

Weight - lb (kg) (w/o added weight)	464 (210)	480 (218)			
Number of Spoons	9	6			
Spoons	Replaceable 3/4" Closed, Case Hardened				
Spoon Spacing-In	7" - Forward Travel				
Gang Spacing	5-1/2"	6-1/2"			
Number of Gangs	12	2			
Water Tank Capacity (Gallons per tank)	29 36				
Optional Water Tank Wt. when Full - lb (kg)	490 (222) 600 (272				
Plug Size	3/4"				
Colors					



CR25 SERIES STRAW CRIMPER



Keep soil and seed where you put it.

If heat, erosion, or run-off is a problem, crimping straw into the ground needs to be the final step in grass seeding. Crimping straw into the soil protects the seed, retains moisture, and aids in germination.



DH10/15 SERIES DISC HARROWS







Food plots and small farms... just right for the Land Pride Disc Harrow.

The Land Pride DH10 Series Disc Harrow opens and breaks up the soil surface to help prepare the soil seedbed for planting. The forward gang has aggressive notched discs while the rear gang has a choice of notched or smooth discs to quickly break up and evenly redistribute the finely cultivated topsoil. The DH10 Series Disc Harrows have applications in homeowner landscaping, small nurseries, gardens, small hobby farms, wild game food plots, and medium-duty residential use.

Disc gangs on the DH15 Series can be ordered with smooth or notched arrays for lighter or more aggressive applications based on customer needs. The DH15 is at home in

applications from commercial landscaping, nurseries, and large gardens to small farms and municipal.



	DH1048	DH1060	DH1560	DH1572	DH1590	
Horsepower	Max.	40 HP	Max 65 HP			
Hitch	Cat. 1		Cat. 1			
Working Width (cm)	48" (122)	60" (152)	60" (152)	72" (183)	90" (229)	
Weight (kg)	420 (191)	549 (249)	628 lbs. (285)	714 lbs. (324)	865 lbs. (392)	
Disc Blade Size	16"	16" or 18"		18" Diameter		
Disc Type	Notched of	or Smooth	No	tched or Smoo	oth	
No. of Disc Blades	12	16	16	20	24	
Disc Blade Spacing	7-1	/2"	7-1/2"			
Bearing Hanger	3/8" Plate,	5/8" U-bolt	3/8" Plate, 5/8" U-bolts			
Bearing Type	2 per Ga Aligning Bear		2 per Gang - Self Aligning, Sealed Bearings			
Angling	0, 7, 14, 2' (60" w/. Adjustmer	Angling	0, 7, 14, 21 Degrees w/Angling Adjustment Handle			
Frame Tubes	2" Sc	quare		2-1/2" Square		
Gang Tubes	3" x 1	1-1/2"		3" x 2"		
Gang Axle	1" Square, High Carbon Steel		1" Square, High Carbon Steel		el	
Weight per Disc -lbs (kg)	35 (16)	34 (16)	38 (17)	34 (15)	36 (16)	
Center Sweep Option	N/A		9" Sweep			
Disc Scrapers	N	/A	Optional, Adjustable			
Colors						



DH25/35 SERIES DISC HARROWS







Hobby to Organic; Farming that is.

Land Pride DH25 and DH35 Disc Harrows offer reliable, quality conventional tillage for hobby farmers to organic operations. Available in 6', 8', 10, and 12' widths, Land Pride Disc Harrows are one of the most effective methods for mechanically eliminating weeds while leveling rutted fields.

- Tubular frame instead of angle iron
- Self aligning, sealed ball bearings
- Front and rear leveling
- Optional furrow fillers, disc scrapers, center sweep, SMV Kit, and Tongue Jack
- Disc scrapers are available to reduce build-up on discs



DH25: Heavy-duty 1/2" thick bearing hangers resist the high torque from two 5/8" U-bolts.



DH35: Heavy-duty 5/8" thick bearing hangers resist the high torque from two 3/4" U-bolts.

	DH2572	DH2596	DH3510	DH3512	
Horsepower	40-100 HP		45-100 HP	55-100 HP	
Hitch	Cat. 1	& 2	Pull-type Hitch with Clevis		
Working Width (cm)	72" (183)	96" (244)	10'6" (320)	12' (366)	
Weight - Ib (kg)	947 (430)	1,143 (518)	2491 (1,130)	2,747 (1,246)	
Disc Blade Size	20" or 22"	Diameter	20" or 22"	Diameter	
No. of Disc Blades	20	24	28 or 32	32 or 36	
Disc Blade Spacing	7-1/	2"	7-1/2" (or 9"	
Bearing Hanger	1/2" Plate, 2 U-bo		5/8" Plate, 2 U-bo		
Bearing Type	Self Alignin Beari 2 per (ings	Self Aligning Bearing 3 to 4 Bearings per Ga		
Front Gang Angling	0, 7, 14, 21 Degrees		Front: 15, 18, 21 Degrees		
Rear Gang Angling	7, 14, 21 Degrees		12, 15, 18 Degrees		
Frame Tubes	3" Square		3" x 5"		
Gang Tubes	4" x	3"	3" x 5" x 1/4" Wall Tubing		
Gang Axle	1-1/8" Si High Carb		1-1/8" So High Carb		
Weight per Disc - Ib (kg) 7-1/2" Spacing	47 (21)	48 (22)	79-84 (36-38)	76-82 (34-37)	
Weight per Disc (kg) 9" Spacing	51 (23)	52 (24)	87-93 (39-42)	81-86 (37-39)	
Transport Tires	N/	A	2 Std. 9.5Lx15	, 4 Optional	
Center Sweep Option	9" Sweep		9" Sw	еер	
Disc Scrapers	Optional, Adjustable		Optional, A	djustable	
Transport Lights	N/.	А	N/A	Standard	
Colors					





DT35 SERIES








Quickly create channels for small irrigation ditches.

The DT35 Ditcher features a standard 1" ripper shank, adjustable impeller head, and reversible/replaceable cutting edges. The DT35 quickly creates channels for small irrigation ditches and for efficiently diverting water from unwanted areas.



Due to the highly abrasive environment, the impeller blades and skid shoes are both adjustable and replaceable.

Qu	ÇK	ITCH SYSTEM
		- or of Elvi

30-60 HP Cat. 1 & 2, Quick-Hitch

Adaptable 390 (177)

4 Adjustable Blades with

Replaceable Cutting Edges

16" Narrow Trench; 18" Wider & Deeper Trench Cat. 4 with Shearbolt

Manual

Standard #80 Roller Chain Fully

Enclosed in Oil Bath

Easily Accessible Standard

Replaceable,

3/8" Thick

Horsepower

Hitch

Impeller

Driveline

Impeller Settings

1" Ripper Shank

Chain Tightener

Storage Stands

Skid Shoe

Colors

Depth Controlling

Drive Chain

Material Control Deflector

DT55 SERIES DITCHERS









A versatile tool to use in many water control applications.

Cleaning ditches along roadsides or creating them in fields to drain standing water away from crops, the DT55 Ditcher makes it simple. The 20" impeller leaves a clean and sculptured trough to keep water flowing freely from unwanted areas. With the Material Control Chute in place, dirt can be placed just next to the machine, or thrown many feet away to reshape terraces.

OPTIONS:

- Rear skid shoe helps control depth
- Material chute puts dirt where you want it
- Ripper shank tears through hard packed soils moving smaller material into the impeller path
- Gauge wheel for depth control



DT55	DTM55	
60-1	50 HP	
Cat	. 2 & 3	
540 rpm	1000 rpm	
900 (408)	(w/o options)	
20" Re	einforced	
6 ea, 3/8" Thick Replaceable Hardened AR400 Material		
Double 80 Chain with Spring Loaded Idler		
2-1/4" ID Ball Type Bearings		
Cat. 5 with Shear-Bolt		
Manual or with 2" x 8" Hydraulic Cylinder & Hoses		
16.5 x 6.50-8 Pneumatic Tire; Adjustable from Cutting Edge Height to 10" Below		
3 Height Adjustments; Cutting Edge Depth to 5" Below		
3/8" Thick,	Replaceable	
Dual Parking Stands for Storage Stability		
	60-1 Cat. 540 rpm 900 (408) 20" Re 6 ea, 3/8" Thi Hardened A Double 80 Cl Load 2-1/4" ID Ball Cat. 5 witl Manual or with Cylinde 16.5 x 6.50-8 Adjustable frc Height to 3 Height Adju Edge Dept' 3/8" Thick, Dual Parl	









RS15/20 SERIES RIPPER SHANKS









Land Pride's heavy-duty 3-Point RS15 and RS20 Ripper Shanks are tillage tools perfect for fracturing compacted hardpan. The single-shank RS15 and dual-shank RS20 are capable of ripping the soil up to 27" deep. Both models feature high carbon 1.25" heat treated steel shank(s), heat-treated replaceable tips, shear pin protection, and a Cat 1 and 2 3-Point hitch. The RS20 also features adjustable row spacing to be just right for your application.





Multiple shank height mounting options helps large tractors go deep and smaller tractors get more transport clearance.



Shank tips feature 2" wide x 11-1/2" long ripper point with double chrome caps.



	RS15	RS20	
Horsepower	35-80 HP	70-110 HP	
Hitch	Cat. 1 & 2 3-Point (Quick Hitch Compatible)		
Width	40-5/8"	49"	
Row Spacing	-	Up to 42"	
Weight - lbs (kg)	210 (95)	332 (151)	
Number of Shanks	1	2	
Ripping Depth	24"-27"		
Park Stand	Standard		
Color			



FC10/15 SERIES FIELD CULTIVATORS







Tackle seedbed prep, soil aeration and weed control; all in one tool.

The Land Pride FC10 is a single row 3-Point Cat. 1 C-tine Field Cultivator for use by hobby farmers or gardeners. It features 6 spring steel C-tines, reversible and replaceable heat-treated tips, adjustable row spacing, and durable formed steel frame. Working width is 48" up to 57".

The Land Pride FC15 is a 3-Point, 3-bar, 13-tine Field Cultivator that tackles a number of tasks in the field, including seedbed preparation, soil aeration, and weed control, just to name a few. The cultivator features 13 S-tines with reversible and replaceable tips, a Cat. 1 hitch, 2" x 2" square tube frame, adjustable tine spacing, and a 4" working depth. The FC15 also features bolt on extensions to expand the working width from 72" to 96", an industry exclusive! The rear hitch allows you to pull Land Pride's DRG06 & DRG08 Drag Harrows.







MP10/20 SERIES MOLDBOARD PLOWS







Ideal for initial cultivation of soil.

Land Pride MP10 and MP20 Moldboard Plows are ideal for small acreage farms or large gardens. These plows are the ideal tool for initial cultivation of soil to prepare for planting or when deeper tillage – more than a field cultivator can provide - is required. Both models are equipped with replaceable 14" shares, shins, and landsides for easy maintenance. The MP10 and MP20 frames feature a 1" x 4" steel trailing arm and cross member, as well as a Cat. 13-Point hitch.



The optional coulter allows for a smoother furrow edge and helps reduce slightly the drag on the moldboard.



Replaceable shares, shins and landslides offer easy maintenance.

		MP10	MP20
6 · 6	lorsepower	2 WD: 20-60 HP 4 WD: 20-50 HP	2 WD: 30-60 HP 4 WD: 30-50 HP
The same	Hitch	3-Point	Cat. I
Cı	tting Width	14"	27-1/2"
	rking Depth	Max. 7" (Depending on Soil Conditions)	
Wei	ght - lb (kg)	294 (133)	513 (233)
С	onstruction	1" x 4" Bolted Steel Frame	
	Park Jack	Standard	N/A
Number	of Bottoms	(1) 14" Bottom	(2) 14" Bottoms
Plow Shank	Shear Bolt	7/16"-14 x 3" GF	88 Share Bolt
Moldboard & Shi	n Thickness	5/16)"
Frog & Landslid	e Thickness	1/2"	
Coulte	er - Optional	14" Diameter (Greaseable 1-1/4"	
	Color		

AR25 SERIES PASTURE AERATORS







Designed with a twist.

Land Pride's AR25 Series Pull-Type Pasture Aerators are ideal in agricultural conservation tillage and pasture renovations. The heavy-duty, knife-like tines on the aerator are designed with a twist in them to break-up compacted soil horizontally and vertically as they slice into the ground in a twisting fashion. This breaking action conditions the soil to soak up water runoff faster, allow fertilizer to penetrate deeper into the ground, and increase oxygen and water supplies to the plant roots.

- 8" Maximum tine penetration for aerating the soil
- 9" Forged & heat treated through steel tines are very resistant to wear and breakage giving them a long life
- Heavy duty rotary tine hangers are designed to stand up to the rigors of hard rocky soil
- · Optional concrete weights help aerator tines penetrate the ground



Cylinder stops storage area.



9" Forged tines are designed with a twist to lift while fracturing the soil sideways.



Optional hitch is self-leveling for pulling implements behind the Aerator.

	AR2596	AR2510
Horsepower	40-25	0 HP
Hitch	Pull-1	type
Working Width (cm)	7'2" (218)	9'8" (295)
Overall Length	10'11"	
Clevis	Double	e Tang
No. of Tines	48	64
Rotor Angle	2-1/2, 5, 7-1/ 2 Bolt Ad	
Tine Spacing	7-1/	2"
Bearings	Triple Lip Seal a Bearing	
Tire Size	9.5Lx15	5-8 Ply

Wheel Hub
Optional Weights

Option

Colors

Rear Trailing Hitch

Up to 3 -

740 lbs Each

Up to 4 -

740 lbs Each

PD10/15 SERIES POST HOLE DIGGERS







Two sizes: perfect for DIY!

The PD10 and PD15 Series Post Hole Diggers are just right for 3-Point attachment to Cat. 1 subcompact and compact utility tractors. These units offer a 30" or 48" auger length and a choice of 6", 9", & 12" auger flights with cast steel fishtail tips for quick piloting and faster hole starting. Landscapers, rental yards, contractors, farmers, ranchers, and homeowners will find that the PD10 or the PD15 meets their general duty

needs and applications.

Manhandling a Post Hole Digger by yourself is next to impossible. With our innovative Post Hole Digger storage stand, one person hook and unhook becomes a reality!



6", 9", 12", 15" & 18" Rock Augers available for PD15. (Tips highlighted for illustration)

THE STATE OF THE S	W 10
Cast steel teeth are replaceable, and positioned for maximum digging	
performance.	

	PD10	PD15
Horsepower	15-30 HP	20-40 HP
Hitch	(Cat. 1
Yoke (cm)	2-7/8" (7.30) Tubing
Boom (cm)	2-7/8" (7.30) Tubing
Output Shaft (cm)	2"	(5.08)
Input RPM	540 Tracto	or at 300 RPM
Driveline	Category 2	
Component Protection	Shear-Bolt	
Max Auger RPM	96 94	
Auger Length	30"	48"
Dirt Auger Sizes	6", 9	9" or 12"
Rock Auger Sizes	N/A	6", 9", 12", 15", 18"
Flighting Thickness	1/4"	
Options	Hydraulic Cylinder Down Pressure Kit (Applies approx. 500 lbs. of Force)*, Auger Extensions, Auger Alignment Handle, Storage Stand	
Colors		

*May not work in some cab applications.

S YEAR
LIMITED GEARBOX
WARRANTY

5 YEAR LIMITED GEARBOX WARRANTY

PD25/35 SERIES











Additional power for those tougher jobs.

Land Pride PD25 and PD35 Series Post Hole Diggers are a good fit for heavy-duty applications. Landscapers, contractors, ranchers, and other land owners will appreciate the rugged dependability and the quality construction – these PDs will take a beating and last for years. Both are designed for Category 1 or 2 three-point attachment, offer a 48" auger length, and a choice of 6", 9", 12", 15", 18" or 24" auger flights with cast steel fishtail tips.



6", 9", 12", 15" & 18" Rock Augers available. (Tips highlighted for illustration)



Cast steel teeth are replaceable, and positioned for maximum digging performance.



	PD25	PD35
Horsepower	25-55 HP	30-75 HP
Hitch	Cat. 1	or 2
Yoke (cm)	2-7/8" (7.30	0) Tubing
Boom (cm)	3-1/2" (Reinforce	
Output Shaft (cm)	2" (5.	.08)
Input RPM	540 Tractor a	at 300 RPM
Driveline	Category 3	
Component Protection	Shear-Pin or Radial Pin^	
Max Auger RPM	94/75	
Auger Length	48"	
Auger Sizes^	6", 9", 12", 15'	", 18" or 24"
Flighting Thickness	1/4	"
Options	7" or 14" Auger Extension Hydraulic Cylinder Down Pressure Kit^^ (Applies approx. 500 lbs. of Force), Auger Alignment Handle, Storage Stand	
Colors		

[^]Radial Pin recommended on auger sizes of 15" and above.





^{^^}May not work in some cab applications.

HD25/35 SERIES POST HOLE DIGGERS









The economical answer to your post hole needs.

The HD25 and HD35 Series Post Hole Diggers are hydraulically driven and accommodate augers ranging from 6" to 24" in diameter. They are available with a universal quick attach mount, a bolt-on mount for mounting to the side of a bucket on a tractor front-end loader, or with a boom for mounting to a Cat. 1 or 2 3-Point hitch, and meet the heavy duty needs of nurseries, landscapers, contractors, construction companies, ranchers, and land managers. The HD35 will deliver up to 1,605 ft.lbs of torque when industrial-duty is preferred. You can also reverse the auger direction, easing the strain on the auger when extracting it from the ground.



MOUNTING OPTIONS

The HD25 and HD35 Post Hole Diggers are available with a universal quick attach mount, a hydraulic driven 3-Point tractor mount, or a bucket mount.

Hydraulic GPM Range	5-12 GPM 10-25 GPM	
Hitch	Cat. 1 or 2, Universal Quick-Attach, or Front Loader Bucket Mount	
Yoke (cm)	2-7/8" (7.3	0) Tubing
Boom (cm)	3-1/2" (8.89) Reinforced Tubing	
Output Shaft (cm)	2" (5	.08)
Drive	Hydraulic	
Hydraulic Hose	Standard on 3-Point; 2 Each 24' Length on Bucket Mount	
Max Auger RPM	101 93	
Auger Length	48"	
Auger Sizes^	6", 9", 12", 15	", 18" or 24"
Flighting Thickness	1/4	"
Options	Hydraulic Cylinder Down Pressure Kit on 3-Point^^, 3-Pt Storage Stand 7" or 14" Auger Extension QA Mount w/8' or 24' Hoses	
Colors		

Radial Pin recommended on auger sizes of 15" and above. ^^May not work in some cab applications.



SA20 SERIES

POST HOLE DIGGERS









Land Pride's SA20 is a lighter planetary drive Post Hole Digger ideal for land owners, landscapers, hobby farmers, or contractors. The SA20 digs holes from 9" to 36" in diameter and up to 48" deep or deeper with available auger extensions. With a variety of augers available - 7 double flight augers from 9" to 36" and 3 tree augers in 24", 30", and 36" sizes, the SA20 is a versatile and dependable tool.

	SA20
Hitch	Universal Quick-Attach
Output Shaft (cm)	2" (5.08) Hex
Weight - Ib (kg)	162 (73)
Drive	Hydraulic
Hydraulic Requirements	6-30 gpm
Hydraulic Hose	Optional
Max Auger RPM	110
Auger Length	50-3/4" (9" is 49" length)
Auger Sizes	9", 12", 15", 18", 24", 30" or 36"
Tree Auger	24", 30" or 36"
Flighting Thickness	5/16"
Options	8' or 24' Hose, Flat Face Couplers, Skid/Loader Plate, 3 Motor Options, Auger Extensions
Colors	





BOLT-ON ROCK HEAD FOR SA20

Mount to any existing LP auger Carbide bullet teeth Pilot bit w/teeth Wear caps for leading edge of flights 6", 9", 12", 15", 18" & 24"

AVAILABLE FOR PD/HD/SA MODELS:



(Tips highlighted for illustration)

ROCK AUGERS

Land Pride's 36" auger is perfect for

trees.

planting ball-rooted

3.5" High strength tube 3/4" Double flight bore head Bullet style carbide tips 1-3/4" Square shanked pilot 6" 9" 12", 15" & 18"

24" available on SA model only



PR16 SERIES POWERED RAKES







The ideal tool for seedbed preparation.

Land Pride's PR16 Series Powered Rake is a multi-functional seed bed and soil surface preparation tool for landscapers and turf care professionals, capable of grading, leveling, shaping, cultivating, renovating, and pulverizing various types of soil surfaces. They are also capable of raking or windrowing soil, rocks, and construction site debris. The 60" or 72" working widths are a good choice for smaller landscaping and turf renovation jobs,

while the 90" model is perfect for larger commercial jobs.



Wide gauge wheels adjust vertically to set working depth. Sealant helps seal against punctures.



Cast iron chain guard housing protects chain in harsh conditions.



Carbide tipped studs are very tough and can be replaced individually as necessary.





	PR1660	PR1672	PR1690	
Horsepower	25-60	25-60 HP		
Hitch	Cat	.1	Cat. 1 or 2	
Working Width (cm)	60" (152)	72" (183)	90" (228)	
Gearbox		540 RPM, Ball Bearings, Cast Iron Housing, Drain Plug		
Primary Driveline	Ca	nt. 4 Heavy-Duty	/	
Secondary Driveline	Cat.	4 with slip clute	ch	
Material Control Deflector	1/2" x 5", Hard Urethane			
Roller	9-3/8" Diameter, w/ 3/4" x 1-1/2" Carbide Tipped Studs			
Drive Chain	#50 Double Continuous Roller Chain, High Tensile, Enclosed in Oil Bath			
Angle Adjustment	15° Left and Right - Hydraulic or Manual			
Angle Cylinder	2" x 8"			
End Plates		Standard		
Gauge Wheels	60: 13" x 6.5" 72 & 90: 16.5" x 6.5" Air Tires with Sealant and 3/4" Roller Bearings and Spacer Height Adjustment			
Skid Shoes	Replaceable			
Machine Weight - Ib (kg)	980 (445)	1,000 (454)	1,150 (522)	
Colors				

SP20/30 SERIES SOIL PULVERIZERS







Ideal for leveling and seedbed preparation.

The SP20 and SP30 Soil Pulverizers have aggressive reversible 10 1/2" \times 2" \times 1/2" Scarifier shanks to rip crusted soils, enabling the steel spiked roller to break down the soil to a perfect consistency ready for planting.

• Single or double steel spiked roller

• Self-aligning cast 1" bearings with double lip seals

• 1" Diameter shaft in roller

SP30 Series is available with an optional Dual Roller.

	3P2000	3P2U/2	373072	3P3U04	
Horsepower	25-5	5 HP	30-75 HP		
Hitch	Ca	t. 1	Cat. 1		
Working Width (cm)	60" (152)	72" (182)	72" (182)	84" (213)	
H-Beam	10)"	1	2"	
Weight - Sgl Roller - lb (kg)	491 (223)	561 (255)	671 (305)	721 (328)	
Front to Back Length - Single Roller	25-	1/2"	28-1/4"		
No. of Scarifier Shanks	21	25	25	29	
Shank Spacing	2-13	/16"	2-13/16"		
No. of Spikes on Sgl Roller	86	103	103	116	
No. of Spikes on Dbl Roller	N/A	N/A	206	232	
Spiked Roller Tube Diameter	5-9/16" O.D.		, -	8" O.D. I Roller 5-9/16"	
Roller Spike Material	3/8" x 1-1, Replac Heat T	ceable	Steel, Re	x 1-1/4" eplaceable Treated	
Springs	32 lbs	s/inch		r: 32 lbs/inch r: 5 lbs/inch	



Scarifier shanks are reversible for a longer life.



3/8" Steel spikes are welded to the roller's surface and feature replaceable wear sleeves.



Heavy 1" diameter shaft can handle the shock loads from the roller.



STH15/20 SERIES SPIKE TOOTH HARROWS







Renovate, aerate, or rake.

The STH20 Series Spike Tooth Harrow can be used to spread manure, grass clippings, leaf litter, crop stubble, and renovate pastures; it allows for better incorporation of fertilizers, herbicides, granular products, as well as working broadcasted seed into the soil. It also helps to remove gopher mounds, ant hills, ridges from tillage implements, sticks, and small limbs from grassy areas.

The STH15 Series Spike Tooth Harrow cuts through clods, manure, and grasses to break up material into finer pieces so that it can be spread evenly across the ground. This harrow does an excellent job of smoothing garden plots, fields, arenas, and landscaping areas. It loosens crusted soil, aerates legume crops such as alfalfa, and uncovers overwintering insects.

	1		
		7	1
		1	
7	١		
١.			

Teeth on both STH models are diamond shaped, 8-1/2" forged with hardened tip.



STH15

The STH2024 features a hydraulic lift for raising and lowering the harrow teeth.

	STH1590	STH2024	
Horsepower	20 HP Min.	45 HP Min.	
Hitch	Cat. 1	Pull-type	
Working Width (cm)	7'6" (229)	23'7" (719)	
Transport Width	7'6"	8'6"	
Transport Height	35-3/4"	8'8"	
Transport Length	53"	15'	
Field Length	53"	23'	
Weight (kg)	237 (108)	2,100 (907)	
Transport Tongue Weight	N/A	432 (196)	
Tooth Spacing	9"	9"	
Teeth on Ground (per foot)	7	12	
Tooth Size	Diamond Shaped, 8-1/	'2" Forge Hardened Tip	
No. of Teeth	50	244	
Tooth Angle	10 Different Angles	22 or 40 Degrees	
Bars	5	8	
Bar Material	1-11/16" OD	1-11/16" OD	
Wing & Transport Tires	N/A	205R15	
Hydraulic Fold	N/A	Standard	
Colors			



PF/PFL SERIES PALLET FORKS





Expand your material handling capabilities.

The PF Series bucket-mounted Pallet Forks transforms your tractor loader bucket into a forklift. PFL and PFLE Series Pallet Forks are great for retail operations, nurseries, and farms; the heavy-duty PFL64 Series is at home on construction and industrial sites. The PFL models mount to the front loader plate of your tractor and PFLE Models mount to your Euro Hitch, effectively changing your loader into a forklift and increasing your material handling capabilities. With capacities from 1,200 lbs to 6,400 lbs, you will quickly find these attachments save you time and labor!

Spring loaded toggle fork position lock 3/16" Backframe guard Removeable top center bracket for walk through (on select models)

		PF10	PF20	PFL1242	PFL2042	PFL3042	PFL3048	PFLE4548*	PFLE5548*	PFLE5560*	PFL6448 PFLE6448	PFL6460 PFLE6460
	Hitch	Bucket N	Mounted		Universal (Quick-Attach			Euro Hitch			uick-Attach or Hitch
L	Lift Capacity -lb (kg) (per set of 2)	1,000 (454)	2,000 (907)	1,200 (544)	2,100 (952)	3,000 (1,360)	3,000 (1,360)	4,500 (2,041)	5,500 (2,494)	5,500 (2,494)	6,400 (2,902)	6,400 (2,902)
	Tine Length	31-5/8"	35-5/8"	42"	42"	42"	48"	48"	48"	60"	48"	60"
	Frame Width w/Step	No Step	No Step	45-9/16"		50"		50"	50"	50"	64-1/2"	64-1/2"
PF10	Weight - Ib (kg)	55 (25)	65 (29)	228 (108)	330 (150)	340 (154)	358 (162)	412 (187)	436 (198)	482 (219)	686 (311)	744 (337)
Bucket	Tine Width	3	"	3"		4"		4"	4	."	4-3	3/4"
Mounted	Tine Height	2	"	1-1/4"	1"	1-1/4"	1-1/4"	1-1/2"	1-3	/4"	1-3	3/4"
	Threaded Clamp Rod	1-1/4"	' - 7"		N	I/A				N/A		
	Mount Opening	1-1/2" O ₁ 10-3/4"			N	J/A				N/A		
	Sliding Clamp Handles	9" Arm Leng of Screw to		N/A		N/A						
	Color											

*Universal Quick-Attach available as a Kubota CE Product

BS/BSE/BSR SERIES BALE SPEARS







Easy handling of round or square bales.

The BS Series Bale Spears can be attached to CTLs, skid steers, or tractor loader arms fitted with a skid mounting plate. BSE units fit the Euro-Hitch plates.

The BSR Series are 3-Point Bale Spears for moving large, heavy, round or square bales. All units are American-made and have a 1-year limited warranty.





	BS(E)10	BS(E)20	BS(E)30	BS(E)40	BS(E)50	BSR10	BSR20	BSR30	BSR40
Mount	Universal Quick-Attach or Euro Hitch					3-Point, Cat. 1 or 2		3-Point, Cat. 2 or 3	
Lift Capacity - lb (kg) 24" from face of frame	1,800 (817)	2,500 (1,134)	3,000 (1,360)	3,000 (1,360)	4,000 (1,814)	1,800 (817)	3,000 (1,360)	3,000 (1,360)	4,000 (1,814)
Usable Spear Length	45" 19" Stabilizer	45"	28", 35", & 45"	28", 35", & 45" 19" Stabilizer	28", 35", & 45"	44" Upper 19" Lower	44"	32" Option: 28" 39" Option: 34" 43" Option: 44"	44"
Number of Spears	1	2	3	3 or 4	3 or 4	3	2	3	4
Max. Weight - Ib (kg)	168 (76)	208 (94)	228 (103)	242 (110)	286 (130)	112 (51)	152 (69)	165 (75)	252 (114)
Stabilizer Extension - Ib (kg)	N/A	N/A		70 (32)		N/A	N/A	N/A	N/A
Stabilizer Extension Height	N/A	N/A	61.4"		N/A	N/A	N/A	N/A	
Spear Construction	Forged					F	orged		
Color									


BG/BGE2400 SERIES BALE GRABBERS





Move and stack round bales with ease.

Moving round bales is made more efficient with the Land Pride BG2400 and BGE2400 Bale Grabber. This Bale Grabber allows customers to move and stack round bales up to 2,400 lbs without damaging the wrap, and the standard back stop prevents material from intruding into the operator zone. The BG2400 is available with a universal quick-attach hitch or the BGE2400 is available with a euro mounting plate for use on both Skid Steers and Tractors. Each arm is controlled with a 3" x 16" x 1-1/2" welded cylinder.





An optional counter balance valve maintains even, constant pressure and prevents hydraulic bleed-off.



Round tubing prevents wrapped bale damage.



Standard backstop prevents material intruding into operator zone.



Available with Universal Quick-Attach or Euro hitch.

	BG2400	BGE2400		
Hitch	Universal Quick-Attach	Euro		
Weight - lbs (kg) without options	585 (265)	605 (274)		
Closed inside arm width	37-1/4"			
Closed arm length	57"			
Maximum tip opening width	92-1/2"			
Bale capacity max. diameter/weight	Up to 72", 2400 lbs.			
Pivot pins	1-1/4" Gr	easeable		
Hydraulic cylinder	3" x 16" x	1-1/2" Rod		
Hydraulic pressure rating	3500 psi			
Color				



SGC05 SERIES CLAW GRAPPLES





Quickly handle big jobs.

Move brush, clean stalls, lift debris, and so much more with Land Pride's SGC05 Claw Grapple. The SGC05 will make chores a breeze. Easily grasp, lift, and move a variety of materials making property maintenance easier and less time consuming.

Our SGC05 tines are manufactured from high-tensile AR400 Steel to make sure it stands up to demanding use. For added strength, the frame is made of $2" \times 3"$ rectangular tubing. And it carries the Land Pride name, so you know quality is built in.



Tines are manufactured from high tensile AR400 steel, making the grapple lightweight, yet extremely durable.





Land Pride 3rd Function Valve accessory kit adds versatility to your tractor.



30" Jaw opening and open back for good visibility from tractor seat.



	SGC0548	SGC0554		
Mount	Kubota BX Quick Hitch System or Pin Direct to Loader Arms	Kubota BX80 Universal Quick-Attach		
Width	48"	54"		
Weight - Ibs (kg)	220 (100)	225 (102)		
Closed Height	26-1/2"			
Number of Bottom Teeth	6			
Number of Top Teeth	5	7		
Teeth Spacing	9-3/8"	10-1/2"		
Tooth Thickness	1/4	ıı		
Working Length of Teeth	8-3/	8"		
Jaw Opening	30	"		
Tine Material	AR400			
Color				

CB05/10 SERIES

COMBINATION BUCKETS









Four tools in one to increase versatility.

Land Pride's 4-n-1 Combination Buckets increase the versatility of the front loader. As the name implies, 4-n-1 Buckets are designed to act like 4 attachments – dozer blade, scraper blade, grapple, and bucket.

The CB0550 fits Kubota 60 and 70 Series BX Front Loaders and features a 50" width, spill screen, reinforced side plates, and optional 3rd function valve.

The CB1060 is specifically designed to fit compact tractors up to 40 HP and features a universal quick attach plate, 60" width, maximum jaw opening of 28", and 3/16" side panels. The lower jaw is made from grade 80 steel to keep the bucket light but strong.



Land Pride 3rd Function Valve accessory kits add versatility and value to your tractor and are available for select Kubota BX, B, and L tractors.



	CB0550	CB1060		
Horsepower	26 HP & Below	Up to 40 HP		
Mount	Kubota BX Quick Hitch System or Pin Direct to Loader Arms	Universal Quick-Attach		
Width	50"	60"		
Weight - Ibs (kg)	266 (121)	363 (165)		
Max. Jaw Opening	30"	28"		
Bucket Depth	21"			
Cutting Edges	3/8" x 3	3"		
Side Panels	3/16"			
Bottom and Back Plate	10 Gauge Gr	ade 80		
Hydraulic Cylinder	2 Qty, 2" x 6"	' x 1-1/8"		
Hydraulic Cylinder Rating	2,500 PSI	3,000 PSI		
Hinge Points	1" Pins			
Color				



SGC06 SERIES CLAW GRAPPLES







Add versatility to your Compact Tractor.

The SGC06 will move brush, rocks and debris, making chores a breeze. Just like our popular SGC05 Series, this grapple allows you to easily grasp, lift, and move a variety of materials greatly reducing the time spent on property maintenance. The tines are manufactured from high-tensile AR400 Steel making it light-weight, yet extremely durable. For additional strength, the frame is made of stout 2" x 3" rectangular tubing. The hinge points feature 3/4" greaseable pins. Land Pride also has 3rd Function Valve Kits for a variety of Kubota tractor/loader combinations. Add versatility to your tractor by completing the package with a 3rd Function Kit.



Tines are manufactured from high tensile AR400 steel, making the grapple lightweight, yet extremely durable.



Land Pride 3rd Function Valve accessory kit adds versatility to your tractor.



Parking stand allows unit to stand upright when not in use, making it easier to attach to tractor loader.



The SGC0660 features a 32" jaw opening and open back design for good visibility from the tractor seat.



	SGC0660
Horsepower	40 HP & Below
Mount	Universal Quick-Attach Kubota B Mount, or Blank*
Width	62"
Weight - lbs (kg)	247 (112)
Closed Height	30"
Number of Bottom Teeth	7
Number of Top Teeth	6
Teeth Spacing	9-3/8"
Tooth Thickness	5/16"
Working Length of Teeth	9"
Jaw Opening	32"
Tine Material	AR400
Color	

SGC10/15 SERIES **CLAW GRAPPLES**









Make quick work of large jobs.

Land Pride's SGC10 and SGC15 Claw Grapples make quick work of large jobs. The SGC can be used to rake, dig, and move rocks, trees, brush, and construction debris without picking up dirt. The compact design minimizes weight while preserving lift capacity. The SGC comes complete with the durability that Land Pride is known for. Our Claw Grapples are ideal for an all-purpose grapple.



Tines are manufactured from high tensile AR400 steel, making the grapple lightweight, yet extremely durable.



All pivot points feature 1-1/4" greaseable pins for longer life.



6" x 6" Frame tube for strength and serrated teeth keep material from rolling out.





SGC15

	SGC1060	SGC1072	SGC1560	SGC1572	SGC1584
Horsepower	30-55	5 HP	50-135 HP		
Hitch	Universal Qu Kubota B Mount		Universal Quick-Attach		
Width	62"	75"	63"	74"	86"
Weight - lbs (kg)	356 (161) w/o hitch	414 (188) w/o hitch	784 (356)	882 (400)	987 (448)
Closed Height	33	"	39"		
Number of Bottom Teeth	10	12	10	12	14
Number of Top Teeth	9	11	9	11	13
Spacing of Teeth	6'		6"		
Tooth Thickness	1/2" Outer;	3/8" Inner	1/2"		
Working Length of Teeth	11-1/	4"	12-7/8"		
Hydraulic Cylinder	2" x 6" x 1	-1/8" Rod	3" x 10" x 1-1/4" Rod		
Jaw Opening	39-1	/2"	50"		
Tine Material	High Tensi	le AR400	Grade 80		
Color					

SGS15 SERIES SKELETON GRAPPLES









Ideal for storm clean-up and land clearing operations.

Let the Land Pride Skeleton Grapple do the digging for you by removing roots, stumps, and other timber or debris. These are available in 66" and 78" widths and with 5-1/2" spacing between the teeth, smaller debris is sifted easily. Dual hydraulic cylinders on the SGS15 can close at various gaps to handle irregular shapes,

and serrated teeth make this grapple a work-horse in storm clean up and land clearing operations. Our Skeleton Grapple also features available bolt-on side panels.





Optional covers protect hydraulic cylinders and fittings.



Optional bolt-on side panels create a bucket for rock or debris sifting.



Serrated teeth design allows for better load gripping.

11				SGS15		
		SGS1566	SGS1578	SSB1578		
	Horsepower	50-135 HP				
	Hitch	Universal Q	Universal			

	SGS1566	SGS1578	SSB1578	
Horsepower		50-135 HF)	
Hitch	Universal Q	Universal Quick-Attach		
Width	66"	78"	78"	
Weight - lbs (kg)	680 (308)	732 (332)	379 (172)	
Closed Height	31	"	N/A	
Number of Bottom Teeth	12 14		14	
Spacing of Teeth	5-1/	5-1/2"		
Tooth Thickness	3/8	3/8"		
Working Length of Teeth	35	35"		
Hydraulic Cylinder	2" x 8" x 1	N/A		
Jaw Opening	37	N/A		
Lower Tine Material	Grade	Grade 80		
Color				

GB20 SERIES GRAPPLE BUCKETS







Handle large bales of hay or loose material.


The GB2084 Grapple Bucket has uses and applications in farming, ranching, horse ranches, dairies, feedlots, construction sites, and nurseries. They have the capability of quickly and conveniently turning your tractor front loader equipped with a Universal Quick-Attach into a Grapple Bucket for handling large bales or loose and shredded materials such as straw, hay, silage, manure, branches, sticks, wood, and trash. The removeable grapple fork helps hold loose and/or shredded materials into the bucket when picking up a load and when transporting the load.



78" Maximum jaw opening handles large bales and high volumes of material.



Mesh style spill screen helps contain loose material.



The optional bolt-on cutting edge is reversible and replaceable extending the life of the cutting edge.

	GB2084
Horsepower	75 HP Min.
Max. Tractor Weight - kg	11,500 lbs (5216)
Tractor Hydraulics Req.	Max. 4, Min. 1
Hitch Style	Universal Quick-Attach
Weight (kg) Optional BOE & Valve incl.	997 lbs (452)
Bucket Capacity Struck	.7 cu yd
Overall Width	84"
Grapple Opening with BOE	78"
Number of Tines	4
Tine Construction	AR400 with Reinforced Gussets
Tine Thickness	3/4"
Hydraulic Cylinder	Dual 3" x 14" x 1-1/2" Rod
Maximum Pressure Rating	3500 psi
Options	Bolt-on Cutting Edge Counter Balance Valve
Colors	

GB/GBE25 SERIES GRAPPLE BUCKETS







Add versatility to your tractor.

The GB25/GBE25 Series heavy-duty Grapple Buckets are ideal for use on your farm, ranch, dairy, construction site or nursery. These Americanmade, large capacity grapple buckets have the capability to quickly and conveniently turn your tractor loader into a versatile tool for handling large bales or loose and shredded materials such as straw, hay, silage, manure, branches, sticks, wood, and trash.



High-strength, cast tines feature adjustable mounts for variable spacing.



Grapple is attached with quick-release 4-pin mount system.



Dual 3" cylinders provide clamping force to hold the load securely.



Parking stand aids in mounting/disc mounting the grapple from the bucket.



Wide 84" jaw opening allows operator to grasp large loads.

	GB2590 GBE2590	GB2596 GBE2596	GB25108 GBE25108
Horsepower		Up to 135 HP	
Hitch Style	GB: Universal Quick-Attach GBE: Euro Hitch Plate		
Weight (kg) Optional BOE & Valve incl.	1,610 lbs (730)	1,648 lbs (748)	1,781 lbs (808)
Bucket Capacity Struck	1.00 cu yd	1.07 cu yd	1.18 cu yd
Overall Width	90"	96"	108"
Grapple Opening with BOE	84"	84"	84"
Number of Tines	4	4	5
Tine Construction	Bolt-on Ductile Iron Tine with Reinforced Gussets		
Tine Thickness		3/4"	
Hydraulic Cylinder	Di	ual 3" x 14" x 1-1/2" R	od
Maximum Pressure Rating	3500 psi		
Options	Bolt-on Cutting Edge Counter Balance Valve		
Colors			

GR15 SERIES STUMP GRINDERS







Turn large stumps into small chips.

The GR1525 Stump Grinder is ideal for contractors, landscapers, and forestry departments. The GR1525 features durable carbide teeth mounted to a 1/2" thick cutting wheel that spins up to 1,050 rpm. Fully controllable from the operator station, this unit has a maximum cutting arc of 35 degrees and depth of 10" below ground to remove the base of most trees. The discharge deflector pivots up allowing the cutting wheel to grind below the ground.



Cutting teeth can be rotated two times before they need replacing. Cutting teeth are easy to replace and carbide tips provide extra long life.



High speed cutting wheel cuts faster with less vibration.



Offset articulating arm allows for optimum line-of-site from operator's seat.



10" Digging depth removes base of most trees.

	GR1525	
Horsepower	25-55 HP	
Hitch	Cat. 1 or 2	
Main Frame	4" x 4" Tube	
Overall Mounting Width	40"	
Overall Length	84"	
Drive & Control System	Power Take-Off and Gearbox	
Hydraulic Requirements	1 or 2 Hydraulic Duplex Outlets	
Articulate Cylinder	3.5" x 16" Stroke with 1-1/4" Rod	
Tilt Cylinder	3.5" x 16" Stroke with 1-1/4" Rod	
Hydraulic Lines & Hoses	3/4" I.D. Hydraulic Hoses with Crimp-on Cordura Sleeve	
Number of Cutting Teeth	30 Replaceable Carbide Teeth	
Cutting Wheel Speed	1050 rpm	
Cutting Arc	35°	
Max. Cutting Depth Below Ground	10"	
Greaseable Hinge Points	Yes	
Outside Cutting Wheel Diameter	24"	
Cutting Wheel Thickness	1/2"	
Colors		

WC15 SERIES WOOD CHIPPERS







Quickly turn limbs into mulch or to aid in decomposition.

Land owners can utilize Land Pride's WC1503 3-Point mounted Wood Chipper to quickly turn mountains of limbs into chips for mulch or just to aid in decomposition. Driven by the tractor's PTO, this unit features a 3" cutting capacity, two reversible and replaceable hardened-steel knives, adjustable discharge chute, and dual B-section drive belts.

The WC1504 features a 4" cutting capacity, 4 reversible and replaceable hardened steel knives and adjustable discharge chute. The WC1504 also features direct drive to the rotor. Both models offer adjustable height/support stands to better match your tractor.



Adjustable discharge spout rotates 270 degrees to place material where you want it.



Hardened steel cutting knives are reversible and replaceable.



WC1504

Adjustable height/support stands help you match up to a tractor easier.

1242		Max. Capacity	Max. Capacity
	Hitch	Cat	. 1
	Upper Hitch Plate Thickness	1/4"	5/16"
-	Main Frame Thickness	3/16	6"
	Weight - lbs (kg)	369 (167)	450 (204)
	Rotor Housing Thickness	3/16	5"
	PTO Speed	540 г	pm
	Driveline Category	Cat. 2 Shear-bolt	Cat. 4 Shear-bolt
-	Main Drive Pulley Diameter	16.35"	N/A-Direct Drive
	Rotor Pulley Diameter	4-1/2"	N/A-Direct Drive
	Belts	2 Single B section	N/A-Direct Drive
	Belt Tensioner	Spring Loaded w/ Adjustment	N/A-Direct Drive
	Rotor Size	17-1/2"	25"
	Rotor Speed	1984 rpm	540 rpm
	Chip Capacity	3"	4"
	Hopper Inlet Opening	14" x 15"	20" x 20"
	Chipper Inlet Opening	6" x 3"	10" x 4"
	Spout Discharge Opening	3-1/4" Square	5-1/4"
	Cutting Knife	Reversible and	Replaceable
	Number of Knives	2	4
	Knife Size	2-1/2" x 2" x 1/4"	6" x 2" x 1/4"
	Knife Material	Hardene	d Steel
	Feed System	Self F	eed
	Feed Height Above Ground	35" w/Adjustable Support Stands	24"-30" w/ Adjustable Support Stands
	Chip Chute Position	270 De	grees
	Colors		
		_	



QH SERIES QUICK-HITCHES





The True Timesavers.

Our Quick-Hitch Systems fit most Land Pride products and are a real time saver when working on multiple projects. Look for this Quick-Hitch System logo to denote applicable products throughout our product line.

Land Pride's patented QH05 Quick Hitch is specifically engineered for subcompact tractors and speeds implement changes, allowing more time to get chores completed. The QH10 & QH15 are designed for Cat. 1 tractors while the QH20 fits Cat. 2 and the QH30 fits Cat. 3.

An optional link is available for implements that have a floating top link allowing unit to follow the contour on the ground.

	QH05	QH10	QH15	QH20	QH30
3-Point Hitch	Cat. 1, Subcompact*	Cat. 1	Cat. 1	Cat. 2	Cat. 3
Overall Width (cm)	32-5/8" (81)	32-5/8" (81)	32-5/8" (81)	40" (102)	46/1/4" (117)
Overall Height	20-1/4"	21-1/4"	23-1/4"	23-5/8"	28-5/8"
Overall Length	6-1/2"	8"	9"	8-7/8"	9-1/2"
Weight lbs (kg)	37 (17)	67 (30)	70 (32)	120 (54)	175 (79)
Automatic Lock	Auto Lock with Quick Release				
Top Hook	Statio	Adjustable	Stati	onary	
Optional	Floating Top Link Attachment				
Colors					

PTO driven implements may need a longer driveline. Please consult our Service & Parts Department for longer profile availability.



SB10/15 SERIES SNOW BLOWERS











Snow Business.

Land Pride's SB10 and SB15 Series of Snow Blowers are available in 3 popular sizes. The two-stage system – auger and impeller - allows the units to move large amounts of snow in a short amount of time. The 3-point hitch is telescopic to couple as close as possible to the tractor. The chute rotation and chute deflector are controlled manually, electrically, or hydraulically.

- · Optional hardened cutting edge
- Shear bolt driveline
- Heavy-duty chute
- Choice of skid shoes
- · Telescoping 3-Point



Large 20" or 24" impeller allows snow to be moved quickly and efficiently .



Augers are 3/18" x 2-1/2" with 14" or 16" diameter, and are protected by a shear-bolt.

		351031	351004	301374
	Horsepower	18-32 HP	18-59 HP	30-59 HP
	Telescoping Hitch	Cat. 1, Quick-Hitch Adaptable		Cat. 1, Quick- Hitch Adaptable
	Working Width (cm)	51" (130)	64" (163)	74" (188)
	Weight - Ib (kg)	390 (177)	501 (227)	545 (247)
	Main Housing Material	12 Ga	uge	12 Gauge
	Side Plate Material	3/10	ô"	3/16"
	Optional Cutting Edge	Bolt-on, Reversible & Replaceable Hardened Steel		Bolt-on, Reversible & Replaceable Hardened Steel
	Optional Skid Shoes (Choice of)	Outer: Bolt-on, Adjustable & Wear Plate: Bolt-on, Ha Replaceable and Rev Button Style: Adjustable & I		rdened, ersible
	Impeller	20" Diameter, 4 Blades		24" Diameter, 4 Blades
	Impeller Housing Depth	6'	1	8"
***************************************	Auger		1 - 14" Diameter, 3/8" x 2-1/2" Flighting	
0	Auger Paddles	2	4	4
	Drive Chain	#60 Heavy		#60 Heavy
	Chute Opening at Base	8'	1	10"
	Chute Rotation	Sprocket Type; Manual, Electric or Hydraulic		Sprocket Type; Manual, Electric or Hydraulic
	Chute Deflector Operation	Manual, Electric or Hydraulic		Manual, Electric or Hydraulic
	Driveshaft Shear Bolt Grade 5 - 1/4 x 20		1/4 x 20	Grade 5 - 1/4 x 20
	PTO Driveline	Cat. 2, Sh	ear Bolt	Cat. 3 Heavy, Shear Bolt
	Colors	ors		

See page 109 for photos of Snow Blower options.



SB25 SERIES SNOW BLOWERS









Optional

Hydraulic

Snow Job.

Designed for tractors ranging from 43 to 105 HP with Cat. 1 or Cat. 2 hitches, the SB2584 Snow Blowers are designed to remove snow from parking lots, walking paths, homeowner lanes, and driveways. The 84" width, 16" auger, and 24" impeller make short work of the largest snow removal tasks.

Optional front cutting edge & inner or outer depth shoes can be purchased with all models to increase life of the units and to prevent gouging on uneven surfaces.







Side Wear Plate

Button-style

Outer Skid Shoe

Chute Rotation available in Manual, Hydraulic, or Electric. The chute rotates so you can direct the snow right where you want







Optional Electric Rotator



Tilt can be easily adjusted manually, or with electric or hydraulic option.

		SB2584
	Horsepower	43-105 HP
	Telescoping Hitch	Cat. 1 & 2
	Working Width (cm)	84" (213)
	Weight - Ib (kg)	875 (397)
9	Main Housing Material	12 Gauge
	Side Plate Material	3/16"
0	Optional Cutting Edge	Bolt-on, Reversible & Replaceable Hardened Steel
	Optional Skid Shoes (Choice of)	Outer: Bolt-on, Adjustable & Replaceable Wear Plate: Bolt-on, Hardened, Replaceable & Reversible Button Style: Adjustable & Replaceable
	Impeller	24" Diameter, 4 Blades

	Button Style: Adjustable & Replaceable		
Impeller	24" Diameter, 4 Blades		
Impeller Housing Depth	10"		
Auger	1 - 16" Diameter, 3/8" x 2-1/2" Flighting		
Auger Paddles	4		
Drive Chain	#60 Heavy		
Chute Opening at Base	12"		
Chute Rotation	Sprocket Type; Manual, Electric or Hydraulic		
Chute Deflector Operation	Manual, Electric or Hydraulic		
Driveshaft Shear Bolt	Grade 5 - 1/4 x 20		
PTO Driveline	Cat. 3 Heavy, Shear Bolt		
Colors			





SBD35 SERIES SNOW BLOWERS







Make quick work of winter's biggest jobs.

Land Pride's SBD35 Snow Blowers feature an adjustable, telescopic Cat. 2 and Cat. 3 hitch to allow for easy hook up. 1/4" Side plates with reinforced gussets wrap on the main housing to create an exceptionally strong blower.

Dual 16" diameter augers feed the SBD35's massive 34" impeller to help the blower dive into the biggest piles without bogging down. The Augers are chain driven with a shear bolt on the sprocket drive shaft to protect the gearbox and driveline from damage.



Both models have a telescoping Cat. 2 or Cat. 3 reinforced hitch for use with or without a Quick Hitch.



The shear-bolt on sprocket drive shaft protects gearbox and driveline from damage.



Aggressive augers manufactured from 3/8" plate steel chew through snow and ice.



Hydraulically controlled chute is gear driven for smooth efficient operation.

	SBD3596	SBD35108	
Horsepower	85-125 HP	120-180 HP	
Hitch	Cat. 2 & 3,	Adjustable	
Working Width (cm)	96" (244)	108" (274)	
Weight - lb (kg)	1614 (732)	1964 (891)	
Main Housing Material	10 Ga.	3/16"	
Side Plate Material	1/4	4"	
Impeller	34" Dia	ameter	
Impeller Housing Depth	10 1/8"	12-3/8"	
Impeller Blades	4		
Auger	16" Diameter		
Auger Flighting	3/8" Plate Steel		
Auger Paddles	4		
Chute Opening at Base	12"	15-5/8"	
Chute Rotation	Sprocket Typ	oe; Hydraulic	
Chute Deflector Operation	Manual or	Hydraulic	
Cutting Edge	1/2" x 6", Reversible & Replaceable; Heat Treated		
Skid Shoes	Outer-Side-Mount, Inner-Rear Mount Adjustable & Replaceable		
Colors			

HRS30 SERIES

HYDRAULIC RESERVOIR SYSTEMS









Add hydraulic power with ease.

The HRS is a self contained power pack to run log splitters, chippers, front-mounted snowblowers and more. Easily hook to the 3-Point hitch on your tractor, hook the driveline to the tractor's PTO shaft, and you have a convenient supply of hydraulic power.

Optional Valve Selections

- No Valve Use PTO to turn hydraulics on and off
- Manual Valve Use remote valve to turn hydraulics on and off
- Solenoid Valve Use electronic control to turn hydraulics on and off



35 Gallon self contained reservoir with 10 micron filter provides more than ample amounts of clean and cool hydraulic fluid for even the most demanding applications.

The oil cooler on the Hydraulic Reservoir System cools the oil when necessary and is included with the hand valve and solenoid valve options. It is optional with the no valve option.





	HRS3025	
Horsepower	52 Min.	
Hitch	Cat. 1 & 2	
Pump Capacity	Approx. 25 GPM @ 540 RPM	
PTO Input Speed	540 RPM	
Hydraulic Fluid Type	Mobil Fluid 424	
Overload Protection	Hydraulic Relief Valve	
Reservoir Capacity & Filter Type	35 Gallons, Conventional 10 Micron Filter	
Overload Protection	3,000 PSI Hydraulic Relief Valve	
Driveline	Category 3	
Pressure & Return Hose Lengths	24 Feet Each	
Case Drain Port	3/4" - 16 UNF	
Hydraulic Cooler	Optional	
Color		





STB10/15 SERIES TRIP BLADES







Efficient Snow Removal with Loader-Mount Blades.

The STB10 and STB15 Snow Trip Blades are designed to fit tractor loaders. The STB10 is available in 5' and 6' widths for tractors with loaders in the 25-40 HP range. The 10 Series Model has a 21" curved Horsepower Range 25-40 HP 30-70 HP moldboard. The STB15 is designed for tractors 30 to 70 HP and is Quick-Attach Quick-Attach Hitch/Mount* available in 6', 7', and 8' widths. The 15 Series features a 27" curved Widths 60", 72" 72", 84", 96" moldboard. Both models feature dual trip springs and abrasion 21" Curved Blade 27" Curved Blade **Moldboard Height** resistant AR400 skid shoes. Hydraulic angling options are Moldboard Material 12 Gauge 10 Gauge available on both units as well and both have safety Moldboard Spring Trip 2 Spring Protection orange edge markers as standard equipment. Moldboard Trip Can be Locked for Light Grading Blade Widths 5-6 ft. 5-6-7-8 ft. **Skid Shoes Button Style** AR400 Material Standard **Angling** Up to 30 Degrees **Optional Hydraulic** Single, Dual or Dual Dual or Dual with Cylinder(s) with Cushion Valve **Manual Angle Positions** 2-Left 1-Center 2-Right Adjustable Spring Tension Standard **Carrier Lift Capacity** Less than 5,000 lbs Less than 3,500 lbs **Carrier Max Operating Weight** Less than 4,500 lbs Less than 8,000 lbs Max. Hydraulic Pressure Rating 3,000 psi Replaceable Wear Edge 1/2" x 6" Mild Steel or Button-style skid shoes 1/2" x 6" Poly are manufactured from Marker Kit Standard high tensile AR400 steel. and are abrasion resistant. Color

*NOT to be used on Skid Steers

SPL05/10 SERIES **SNOW PUSHERS**









Handle large amounts of snow in little time.

The SPL Loader-Mount Snow Pushers are available in an 05 Series that fits BX 60 or 70 Series Tractors only. The SPL05 Snow Pusher is available in a 48" and 60" model with a BX hitch. The unit is 18" high and 18" deep, features a 12 gauge moldboard, 3/16" side panels, and optional steel or poly blades.

The SPL10 Snow Pusher is available in 60", 72", and 84" with a 24" x 24" box, 10 gauge moldboard, and 1/4" sides. The SPL10 features a reinforced box and fits Universal Quick-Attach systems. Optional pull back and steel or rubber blades are also available.



Replaceable skid shoes on the SPL10 are manufactured from high tensile AR400 steel, and are abrasion resistant.



	SPL05	SPL10
Horsepower	Up to 28 HP	20-45
Hitch	BX Hitch or Universal Quick-Attach	Universal Quick-Attach
Working Width	48", 60"	60", 72", 84"
Height	18"	24"
Depth	18"	24"
Moldboard	12 Gauge	10 Gauge
Side Panels	3/16"	1/4"
Optional Blades- replaceable	Steel: 3/8" x 4" Poly: 1/2" x 6"	Steel: 1/2" x 6" Rubber: 1" x 8"
Pullback Blade	Optional	Optional
Skid Shoes	Replaceable	AR400, Replaceable
Colors		

SSP25 SERIES SNOW PUSHERS







Snow has met its match.

The Land Pride SSP25 Snow Pushers come in 10' and 12' widths to quickly clear parking lots and other open spaces. The units feature a large capacity with a 36" moldboard, 35" depth, and a pullback on the SSP2510 to pull snow away from buildings or other obstacles. Full length skid shoes and 5/16" end panels complete this commercial pusher.



Replaceable skid shoes are manufactured from high tensile AR400 steel, and are abrasion resistant.





	SSP2510	SSP2512
Horsepower	50-80 HP	
Hitch	Universal Quick-Attach	
Working Width (cm)	10'	12'
Carrier Lift Capacity	Less than 5,000 lbs	
Carrier Max Operating Weight	Less than 8,000 lbs	
Moldboard Height	36"	
Moldboard Thickness	3/16"	
Side Panels w/ Supports	5/16" Plate	
Blade Depth	35"	
Replaceable Bottom Wear Edge	1-1/2" x 8" Rubber w/Slotted Holes or 1/2" x6" Steel Cutting Edge	
Mounting Steps	Serrated, on Hitch	
Skid Shoes	AR400 1/2" x 4" Reversible, Adjustable	
Option	Pull Back Kit	N/A
Color		



A Division of Great Plains Mfg., Inc. 1525 E. North St. • P.O. Box 5060 Salina, Kansas 67401 Visit our dealer locator at landpride.com

Over 350 Products To Fit Your Lifestyle

All-Flex Mowers • All-Purpose Seeders • Arena Graders • Bale Spears • Box Scrapers • Compact Drills
Core Aerators • Disc Harrows • Ditchers • Drag Harrows • Drag Scrapers • Fertilizer Spreaders
Field Cultivators • Flail Mowers • Food Plot Seeders • Grading Scrapers • Grapples • Grooming Mowers
Hydraulic Reservoir Kits • Landscape Rakes • Moldboard Plows • No-Till Seeders • Overseeders • Pallet Forks
Pasture Aerators • Post Hole Diggers • Powered Rakes • Primary Seeders • Quick-Hitches • Rear Blades
Ripper Shanks • Rotary Cutters • Rotary Tillers • Scarifiers • Seed Bed Rollers • Snow Blowers • Snow Pushers
Snow Trip Blades • Soil Pulverizers • Spike Tooth Harrows • Straw Crimpers • Wood Chippers